


CM - Series cable diameter 12-14mm



CM 02 E 20-29 P

CM 06 EA 20-29 S

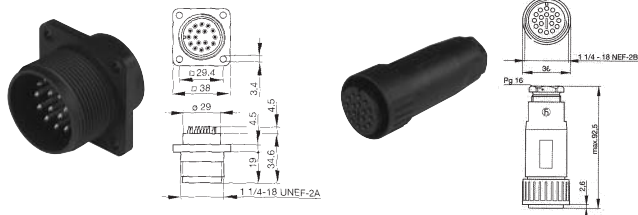

Technical Parameters	CM 02 E	CM 06 EA
Type	surface mounted connector, with flange, with solder bucket	straight cable socket, strain relief by means of a clamping cage
Number of contacts	17 + PE	17 + PE
Max. conductor size	1,5 mm ²	1,5 mm ²
Rated voltage	50 V DC/AC	50 V DC/AC
Rated current	4 A	4 A
Protection class	IP67	IP67
Type of termination	solder	solder
Suitable mate	CM 06 EA 20-29 S	CM 02 E 20-29 P


Part No.	Ord.No.
S CM 02 E 20-29 P	50808
S CM 06 EA 20-29 S	50809

E08 Series with Molded Lead



Innovative sensor-circular connectors of the E-series excel because of their ergonomic design, and with their clearly defined gripping surfaces and numbering arrangement, they simply have more to offer. In general, the E-series is perfectly suitable for applications involving all types of sensors and actuators in automation and offers excellent fail-safety even in the presence of high reversed-bending stresses (for example in drag chains).

E08 CA3A1A Straight

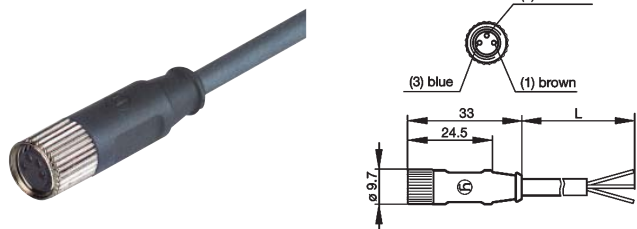


Technical Parameters	E08-CA3A1A-DF0200C1-XA500-AC	E08-CA3A1A-FLO500C1-XA500-AB
Marking *	RKMV 3-06/2M	RKMV 3-224/5M
Type	straight cable socket, integrally molded lead, plastic	
Number of contacts	3	3
Thread diameter	8 mm	8 mm
Cable material	PVC	PUR
Cable type	LiFYY	LiF9Y11Y
Cable length	2m	5m
Conductor size	0,25 mm ²	0,25 mm ²
Rated voltage	60 V DC/AC	60 V DC/AC
Rated current	4 A	4 A
Protection class	IP65	IP65

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
○ E08-CA3A1A-D-F0200C1-XA500-AC	934555-001	69717
○ E08-CA3A1A-FLO500C1-XA500-AB	934555-008	69718

E08 CA3A1A Angled

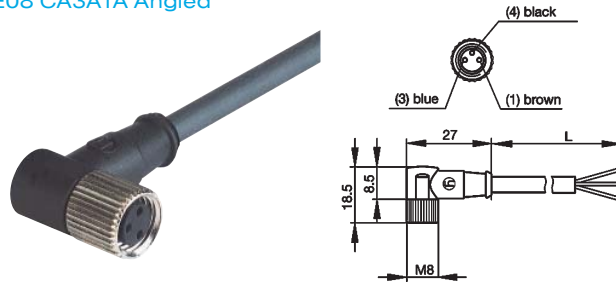


Technical Parameters	E08-CC3A1A-FL0200C1-XA500-AC	E08-CC3A1A-D-F0500C1-XA500-AB
Marking *	RKMV 3-224/2M	RKMV 3-06/5M
Type	angled cable socket, with integrally molded lead	
Number of contacts	3	3
Thread diameter	8 mm	8 mm
Cable material	PUR	PVC
Cable type	LiF9Y11Y	LiFYY
Cable length	2m	5m
Conductor size	0,25 mm ²	0,25 mm ²
Rated voltage	60 V DC/AC	60 V DC/AC
Rated current	4 A	4 A
Protection class	IP65	IP65

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
○ E08-CC3A1A-FL0200C1-XA500-AC	934556-010	69721
○ E08-CC3A1A-D-F0500C1-XA500-AB	934556-002	69930

E08 4P F straight

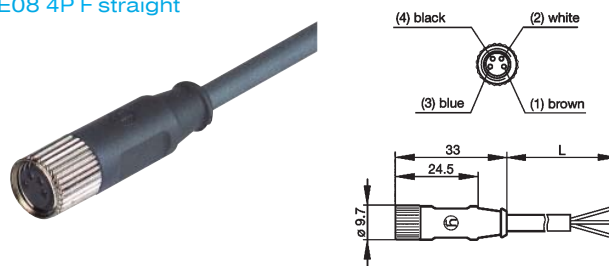

Technical Parameters	E08-CA4A1A-DG0500C1-XA500-AB	E08-CA4A1A-FM0200C1-XA500-AC	E08-CA4A1A-FM0500C1-XA500-AB
Marking *	RKMV 4-07/5M	RKMV 4-225/2M	RKMV 4-225/5M
Type	cable socket, plastic		
Number of contacts	4	4	4
Thread diameter	8 mm	8 mm	8 mm
Cable material	PVC	PUR	PUR
Cable type	LiFYY	LiF9Y11Y	LiF9Y11Y
Cable length	5m	2m	5m
Conductor size	0,25 mm ²	0,25 mm ²	0,25 mm ²
Rated voltage	60 V DC/AC	60 V DC/AC	60 V DC/AC
Rated current	4 A	4 A	4 A
Protection class	IP65	IP65	IP65

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
○ E08-CA4A1A-FM0200C1-XA500-AC	934555-010	69719
○ E08-CA4A1A-FM0500C1-XA500-AB	934555-011	69720
S E08-CA4A1A-D-G0500C1-XA500-AB	934555-005	69693