



Plug-in Connectors



SHxx-3,5





LIFT



SHxx-3,5-M



LIFT stackable side-by-side




Technical Parameters	SHxx-3,5	SHxx-3,5-M
Pitch	3,5mm	3,5mm
Mounting Position	horizontal	horizontal
Wire Section	1,0mm ² stranded 1,5mm ² solid	1,0mm ² stranded 1,5mm ² solid
Hole	1,6x2,4mm	1,6x2,4mm
Rated Voltage	130V	130V
Rated Current	8A	8A
Stripping Length	7mm	7mm
Lift System	yes	yes
Working Temperature	-40°C to +130°C	-40°C to +130°C
Colour	green	green
Suitable for	PHxx-3,5-P PVxx-3,5-P	PHxx-3,5-P PVxx-3,5-P
Note	wide, not suitable to blocks	-

Part No.	Ord. No.	Description
S SH04-3,5	51475	4-poles
S SH05-3,5	51476	5-poles
S SH06-3,5	51477	6-poles
O SH09-3,5	51479	9-poles
S SH12-3,5	51481	12-poles
S SH16-3,5	51482	16-poles
S SH02-3,5-M	51473	2-poles
S SH03-3,5-M	51474	3-poles
S SH08-3,5-M	51478	8-poles
S SH10-3,5-M	51480	10-poles

SHxx-3,81



LIFT

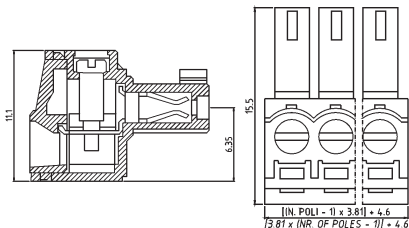

Technical Parameters	SHxx-3,81
Pitch	3,81mm



Mounting Position	horizontal
Wire Section	1,0mm ² stranded 1,5mm ² solid
Hole	1,6x2,4mm
Rated Voltage	130V
Rated Current	8A
Stripping Length	7mm
Lift System	yes
Working Temperature	-40°C to +130°C
Colour	green
Suitable for	PHxx-3,81-P, PVxx-3,81-P

Part No.	Ord. No.	Description
S SH02-3,81	50699	2-poles
S SH03-3,81	50700	3-poles
S SH04-3,81	51483	4-poles
S SH05-3,81	51484	5-poles
S SH06-3,81	51485	6-poles
S SH08-3,81	51486	8-poles
S SH09-3,81	51487	9-poles
S SH10-3,81	51488	10-poles
O SH12-3,81	51489	12-poles



SHxx-5



LIFT



SHSxx-5



Technical Parameters	SHxx-5	SHSxx-5
Pitch	5mm	5mm
Mounting Position	horizontal	horizontal/vertical
Wire Section	2,5mm ² stranded 4,0mm ² solid	1,5mm ² stranded 1,5mm ² solid
Hole	2,8x3,1mm	f2mm
Rated Voltage	450V	250V
Rated Current	16A	10A
Stripping Length	7,5mm	6,2mm
Lift System	yes	-
Working Temperature	+125°C	+125°C
Colour	green	black
Suitable for	PHxx-5-P PVxx-5-P	PVSxx-5

Part No.	Ord. No.	Description
S SH02-5	51493	2-poles
O SH03-5	51494	3-poles
O SH04-5	51495	4-poles
O SH05-5	51496	5-poles
S SH06-5	51497	6-poles
O SH08-5	51498	8-poles
O SH09-5	51499	9-poles
O SH10-5	51500	10-poles
S SHS02-5	51292	2-poles
S SHS03-5	51293	3-poles