

## NiMH Rechargeable "READY TO USE" / ENELoop Batteries

The new NiMH technology - the rechargeable battery is precharged and can be put to use immediately like a standard alkaline battery.

- self discharge is much lower than with standard NiMH batteries - after 6 months, the battery still retains 90% and after 12 months it still retains 80% of its charged capacity. That means more than 365 days of operational readiness!
- rechargeable up to 1000 times
- lasts up to 4 x longer in digital cameras than standard batteries
- quick-charge capable



Part No.	Voltage	Capacity	Part No.	Package
NIMH RTU 800 AAA TECXUS BP2	1,2V	800mAh	AAA	Blister / 2pcs
NIMH RTU 2100 AA TECXUS BP2	1,2V	2100mAh	AA	Blister / 2pcs
NIMH RTU 200-9VTECXUS BP	8,4V	200mAh	GLR61	Blister / 1pcs

Part No.	Ord.No.
S NIMH RTU 800 AAA TECXUS BP2	72807
S NIMH RTU 2100 AA TECXUS BP2	72808
S NIMH RTU 200-9VTECXUS BP	79906



Part No.	Voltage	Capacity	Part No.	Package
HR-4UTG 800	1,2V	800mAh	AAA	1pc
HR-4UTG 800 BP4	1,2V	800mAh	AAA	Blister / 4pcs
HR-3UTG 2000	1,2V	2000mAh	AA	1pc
HR-3UTG 2000 BP4	1,2V	2000mAh	AA	Blister / 4pcs

Part No.	Ord.No.
S HR-4UTG 800	74075
S HR-4UTG 800 BP4	60290
S HR-3UTG 2000	70887
S HR-3UTG 2000 BP4	60288

## NiMH Battery Packs



Part No.	Voltage	Capacity	Part No.	Package
NIMH 950 AAA-1Z TECXUS SP4	1,2V	950mAh	AAA	1 unit/4pcs
NIMH 2500 AA-1Z TECXUS SP4	1,2V	2500mAh	AA	1 unit/4pcs
NIMH 4300 C-1Z TECXUS SP2	1,2V	4300mAh	C	1 unit/2pcs
NIMH 9000 D-1Z TECXUS SP2	1,2V	9000mAh	D	1 unit/2pcs

Part No.	Ord.No.
O NIMH 950 AAA-1Z TECXUS SP4	72799
S NIMH 2500 AA-1Z TECXUS SP4	72806
S NIMH 4300 C-1Z TECXUS SP2	47297
S NIMH 9000 D-1Z TECXUS SP2	47298

NiMH blocks for power supply of wireless phones, they are finished with soldering eyelets or MITSUMI connector.




Part No.	Voltage	Capacity	Dimensions	Package
AKKU 1100-3	3,6V	1100mAh	42,4x50x14,4mm	1 unit/3pcs
AKKU 1100-4	4,8V	1100mAh	53x51x14,4mm	1 unit/4pcs
AKKU PP 1	7,2V	1100mAh	98x42x12mm TAMIYA connector	1 unit/3pcs

Part No.	Ord.No.
S AKKU 1100-3	70392
S AKKU 1100-4	70465
O AKKU PP 1	5015

## NiMH Backup Batteries


NMH 60-2,4      NMH 60-3,6

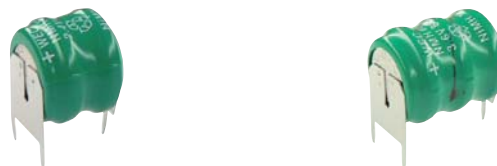

Part No.	Voltage	Capacity	Outlets	Diameter x height
NMH 60-2,4	2,4V	80mAh	3 pins	15,5x12 mm
NMH 60-3,6	3,6V	80mAh	3 pins	15,5x18 mm

Part No.	Ord.No.
S NMH 60-2,4	70474
S NMH 60-3,6	54631

## Summary of Battery Sizes

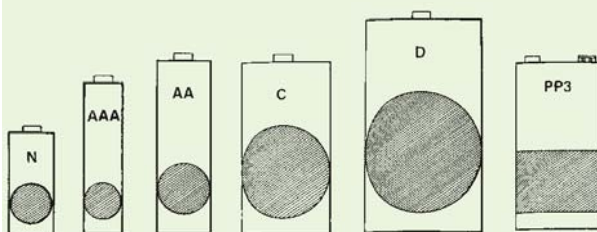

### Standard types

Type	ANSI	IEC	Diameter x height [mm]	
Lady	N	UM5	R1	12,0 x 30,2
Micro	AAA	UM4	R03	10,5 x 44,5
Mignon	AA	UM3	R6	14,5 x 50,5
Baby	C	UM2	R14	26,2 x 50,0
Mono	D	UM1	R20	34,2 x 61,5
9V Block	PP3	-	6F22	(26,0x17,5) x 49,0

### Industrial Types

Type	ANSI	Diameter x height [mm]		
	AAAA	8,3x6,7		
Micro	2/3AAA, 5/4AAA, 5/3AAA	10,5x28,5	10,5x50	10,5x67
Mignon	1/3AA, 1/2AA, 2/3AA	14,5x17,5	14,5x23,7	14,5x28,2
	4/5AA, 4/3AA	14,5x43	14,5x65	
	A (AF), 2/3A (AF)	17x50	17x28,5	
	4/5A (AF), 7/5A (AF)	17x43	17x66	
Baby	SC, 1/2SC, 2/3SC	23x43	23x25,5	23x26,8
	4/5SC, 4/3SC	23x34	23x50	
Mono	1/2D, 3/2D(F), DD	33x36,5	33x90,5	33x111