Extremely small!

0.14 - 0.34 mm²/AWG 26-

The new mini PCB terminal block PTQ with IDC fast connection



3.0

WHILE WELLE


PTQ – THR solderable mini PCB terminal block with QUICKON IDC fast connection

The two-position PTQ mini PCB terminal block with an overall height of only 8 mm was specially developed for use in THR soldering processes. The tape on reel packaged PTQ is suitable for fully automated assembly processes, enabling a time saving and increased production efficiency.

Tool-free conductor connection takes place in pairs using insulation displacement: insert conductor without stripping, push down the actuation lever – finished!

The conductors are securely fixed in the insulation displacement contact by the snap-in mechanism. Releasing the conductor takes place tool-free by opening the actuation lever.

It's easy - with QUICKON fast connection!

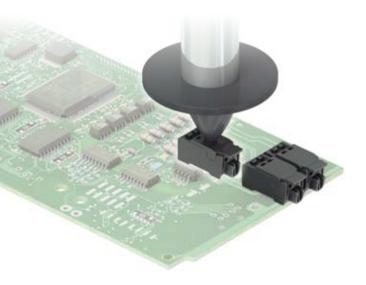

PHOENIX CONTACT GmbH & Co. KG D-32823 Blomberg, Germany Phone: +49/5235/3-00 Fax: +49/5235/3-4 12 00 www.phoenixcontact.com

Ordering data PTQ 0,3/2-2,5 THR R... Order No.: 1702610

Technical data

- Current: up to 4 A
- Voltage: up to 160 V
- Connection cross section: solid/stranded 0.14 - 0.34 mm² / AWG 26-22
- Pitch: 2.5 mm
- Height: 8 mm



Press the snap-in mechanism together and lift the actuation lever.



Insert the "cut-to-length" conductor into the actuation lever ...



... until it is visible in the housing cutout.



Press down the actuation lever — finished.

