



Energy where it matters.

The proven choice for remote energy

AIR 40 is the premier micro-wind turbine for land-based applications. It operates efficiently across a wide range of wind speeds, providing energy for telecom, water pumping, lighting, SCADA, off-grid homes, or other low energy demand battery charging applications. The AIR 40 is ideal for pairing with solar to offset seasonal variations, delivering more consistent energy.



Advanced microprocessor technology for superior performance and high wind protection without mechanical braking



Blades designed for quieter operation, durability and optimum energy capture in most wind speeds



Lightweight design is simple and easy-to-install; integrated controller for plug-andplay operation



Pair with solar PV for redundant energy production year-round



Produces 40 kWh of energy per month* - generating energy in a wide range of wind speeds




*Assuming average wind speed of 5.8 m/s (13 mph). Actual performance varies with wind speed, tower height and site conditions.



Energy where it matters.

AIR 40

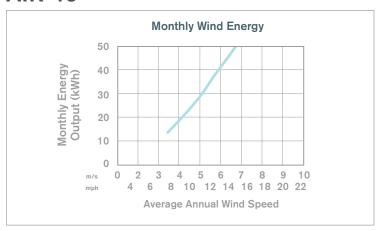

Technical Specifications

Energy	Approx. 40 kWh/mo at 5.8 m/s (13 mph) ¹
Swept Area	1.07 m ² (11.5 ft ²)
Rotor Diameter	1.17 m (46 in)
Weight	5.9 kg (13 lb)
Shipping Dimensions	686 x 318 x 229 mm (27 x 12.5 x 9 in) 7.7 kg (17 lb)
Startup Wind Speed	3.1 m/s (7 mph)
Voltage	12, 24 and 48 VDC
Turbine Controller	Mircoprocessor-based smart controller
Body	Permanent mold cast aluminum
Blades	(3) Injection-molded composite
Alternator	Permanent magnet brushless
Overspeed Protection	Electronic torque control
Survival Wind Speed	49.2 m/s (110 mph)
Mount ²	1.5 in schedule 40 pipe
	48 mm (1.9 in) outer diameter
Wind Speed Operating Range	3.1-22 m/s (7-49 mph)
Optimum Wind Speed Range	4.5-22 m/s (10-49 mph)
Shipping Dimensions Startup Wind Speed Voltage Turbine Controller Body Blades Alternator Overspeed Protection Survival Wind Speed Mount ² Wind Speed Operating Range	686 x 318 x 229 mm (27 x 12.5 x 9 in) 7.7 kg (17 lb) 3.1 m/s (7 mph) 12, 24 and 48 VDC Mircoprocessor-based smart controller Permanent mold cast aluminum (3) Injection-molded composite Permanent magnet brushless Electronic torque control 49.2 m/s (110 mph) 1.5 in schedule 40 pipe 48 mm (1.9 in) outer diameter 3.1-22 m/s (7-49 mph)







FIVE-YEAR LIMITED WARRANTY

Southwest Windpower Inc. / USA tel: +1.928.779.9463

Southwest Windpower GmbH / Germany tel: +49 (0) 221 16 53 94 50



