

CK Chip type, Low Impedance, High CV Series

Low Impedance Solvent Proof

ZC → CK
Low Imp.




- Chip type, low impedance temperature range up to 105°C
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive

Item	Characteristics																		
Operating temperature range	-55 ~ +105°C																		
Leakage current max.	$I = 0.01\text{CV}$ or $3\mu\text{A}$ whichever is greater (after 2 minutes)																		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C																		
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50	63	80	100									
	$\tan\delta$	0.24	0.19	0.16	0.14	0.12	0.12	0.10	0.10	0.10									
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50	63	80	100									
	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2	3									
	Z-55°C/Z+20°C	3	3	3	3	3	3	3	3	4									
Load life (after application of the rated voltage for 2000 hours at 105°C)	Leakage current	Less than specified value																	
	Capacitance change	Within $\pm 25\%$ of initial value																	
	$\tan\delta$	Less than 200% of specified value																	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value.																		
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them to 250°C for 30 seconds.																		
	Leakage current	Less than specified value																	
	Capacitance change	Within $\pm 10\%$ of initial value																	
	$\tan\delta$	Less than specified value																	

DRAWING

Unit : mm

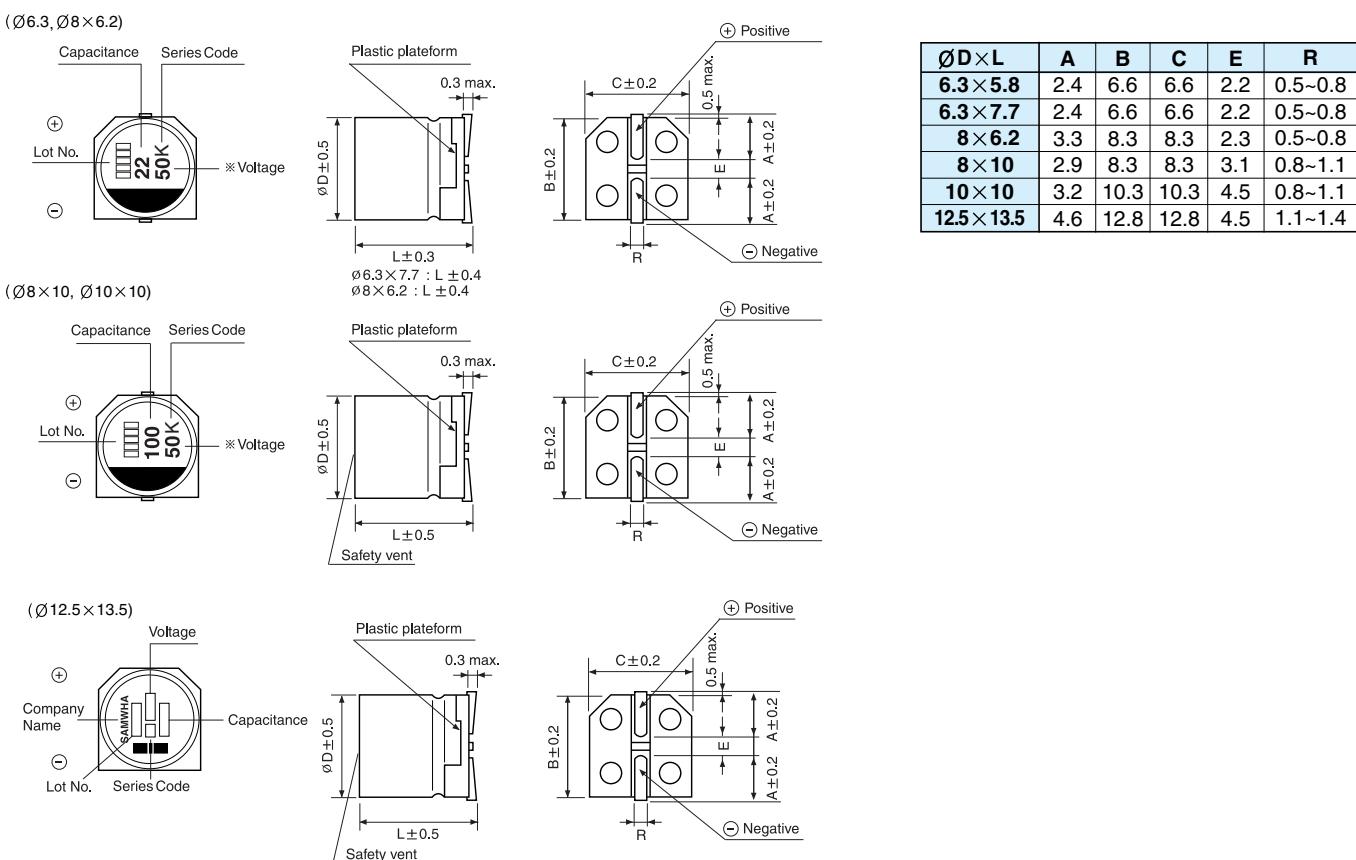

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

CK series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	6.3			10			16			25			35			50		
10																	6.3×5.8	0.88	165
15																	6.3×5.8	0.88	165
22																	6.3×5.8	0.88	165
33								6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7	0.68	280
																	8×6.2	0.63	300
47				6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7	0.68	280	
																	8×6.2	0.63	300
68		6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7	0.34	280			
																	8×6.2	0.26	300
100		6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7	0.34	280				8×10	0.17	450
																	8×6.2	0.26	300
150		6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7	0.34	280				8×10	0.17	450	8×10	0.17	450
																	8×6.2	0.26	300
220		6.3×5.8	0.44	230	6.3×7.7	0.34	280	6.3×7.7	0.34	280				8×10	0.17	450	10×10	0.09	670
																	8×6.2	0.26	300
330		6.3×7.7	0.34	280				8×10	0.17	450	8×10	0.17	450	10×10	0.09	670			
																	8×6.2	0.26	300
470		8×10	0.17	450	8×10	0.17	450	10×10	0.09	670									
680		8×10	0.17	450	10×10	0.09	670												
1000		10×10	0.09	670															
1500		10×10	0.09	670															

Ripple current (mA rms) at 105°C, 100kHz

Impedance (Ω) at 20°C, 100kHz

Case size $\text{\O}D \times L$ (mm)

μF	WV	63			80			100		
10		6.3×5.8	2.3	80	6.3×7.7	2.4	60			
22		6.3×7.7	2.1	120	8×10	1.3	130	8×10	1.3	130
33		8×10	0.9	250	8×10	1.3	130	10×10	0.7	200
47		8×10	0.9	250	10×10	0.7	200	12.5×13.5	0.45	500
68		10×10	0.45	400	12.5×13.5	0.35	500	12.5×13.5	0.45	500
100		10×10	0.45	400	12.5×13.5	0.35	500			
150		12.5×13.5	0.32	800	12.5×13.5	0.35	500			
220		12.5×13.5	0.32	800						

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz \leq
Coefficient	0.35	0.5	0.64	0.83	1.00