⁸ wiha

Wiha screwdrivers.

Wiha makes it possible: Optimum fitting for perfect work.

							4					
		1				PH2	2 × 10	0			N	rih
	Driv Driv	Phillips PH	Xeno PH	Pozidriv PZ	Xeno SL/PZ	TORX*	TORX* Tamper	TORX PLUS*	For internal hex	For hex nuts	For internal square	triangular nuts
SoftFinish [®] screwdrivers	13 20-21	14 20-21		14 20-23		16-17 22-23	Resistant 15	17/23	screws	19/23	screws	screws
Screw-holding screwdrivers	13	14										
SoftFinish® with mm scale	15	15		15								
SoftFinish® Stubby-screwdrivers	16	16		16								
MicroFinish screwdrivers	25/27	25/27		26/27		26				26		
Classic screwdrivers	29/30	29/30		29/30		29			30	30		
Wooden handle screwdrivers	33	33		33								
PicoFinish screwdrivers	35 38-39	35 38-39		35		36 38-39		36	37/39	37/39		
Small screwdrivers	42	42										
SoftFinish® electric slimFix screwdriver	49-51	49-51	49-50	49-51	49-50	49/51					49	
SoftFinish® electric slimVario screwdriver	53-56	53-56	53	53-54 56	53-56	53/56					53	
SoftFinish®electric screwdriver	57/59	58-59	61	58-59	61	58			58	58-59	58	
Classic electric screwdriver	62	62										
Voltage testers	63											
SoftFinish® ESD screwdriver	65-66	65-66		65		66						
SoftFinish® ESD Stubby-screwdrivers	65	65		65								
Precision ESD	68/70	68/70		68		69/70		69	68/70	68/70		
Ceramic	71	71										

۲

۲

9-

Screwdriver range

	The Wiha Finish screwdriver concept. The revolution in screwdriver design.	10 -	11
iha 🌒	Wiha SoftFinish®. The specialist for dry and general applications. – Wiha SoftFinish®Scala	12 - 15	23
	– Wiha SoftFinish® Stubby-Schraubendreher	16	
@	Wiha MicroFinish. The specialist for wet and oily applications.	24 -	27
nut \varTheta	Wiha Classic. The robust screwdriver for multiple applications.	28 -	30
1-150	Wiha wooden handle. The all-rounder for woodworking applications.	32 -	33
-	Wiha PicoFinish. The comfortable precision screwdriver.	34 -	39
iha 🌒	Wiha Universal scraper. Easily removes sealing, paint and glue.	40 -	41
	Wiha special tools. – Universal scraper, trim pin remover. – Square reamer, awl. – Small screwdrivers. – Magnetisers.	31 31 42 42 43	
	- Screw extractor. Wiha VDE screwdrivers. For safety and quality. - Wiha slim-Family	44 - 46 -	
riha 💿	Wiha SoftFinish® electric slimFix. The safe and comfortable insulated VDE screwdriver	48 -	51
iha 🍨	Wiha SoftFinish® electric slimVario. Maximum safety at minimum size.	52 -	56
iha 🕘	Wiha SoftFinish® electric. The safe and comfortable insulated VDE screwdriver. – Wiha Xeno. For terminal screws.	57 - 60 -	
Ram 😁	Wiha Classic electric.	62	
withor	Single-pole voltage tester.	63	
EPA	Wiha ESD screwdriver. For use on electrostatically sensitive components. Wiha SoftFinish® ESD. Wiha SoftFinish® ESD screwdriver Stubby.	64 - 65	65
	Wiha Precision ESD. The static dissipative precision screwdriver.	67 -	70
== 0	Wiha Ceramic. The non-static adjustment tool for clean rooms.	71	



The Wiha Finish screwdriver concept.

The revolution in screwdriver design.

Wiha SoftFinish®

Wiha MicroFinish





Introducing the next generation of screwdrivers from Wiha: the SoftFinish® and the MicroFinish, because functionality and ergonomic styling together make up the most important aspect of a screwdriver.

The generation of Wiha Finish handles with its total of four handle sizes was developed on the basis of extensive studies into handle ergonomics with the support of high-profile research institutes. The result is a completely ergonomic design and optimal handle lengths and diameters. The user is guaranteed a perfect hold with every handle size.

The feel good factor

Due to the combination of material and handle size, each Finish screwdriver fits perfectly into the palm of the hand. There is no strain on muscles, ligaments and joints, with the result that minimum force is required for maximum torque.


SoftFinish® or MicroFinish

Screwdrivers used in dry working environments have to have a different handle surface to those used in oily working environments. Wiha has taken this on board and has developed a Finish screwdriver for dry and general applications and one for oily applications.

The handle core of both models consists of impact-resistant, recyclable special plastic material. The torque strengthening Finish zone of the SoftFinish® version is made of a soft, thermoplastic elastomer and is ideal for dry and general applications.

The Finish zone of the MicroFinish version is made of impact-resistant cellulose acetate that is also resistant to oil and chemicals. Its micro-fine surface structure ensures convincing high-torque transmission without slipping, even with oily hands. ۲

۲

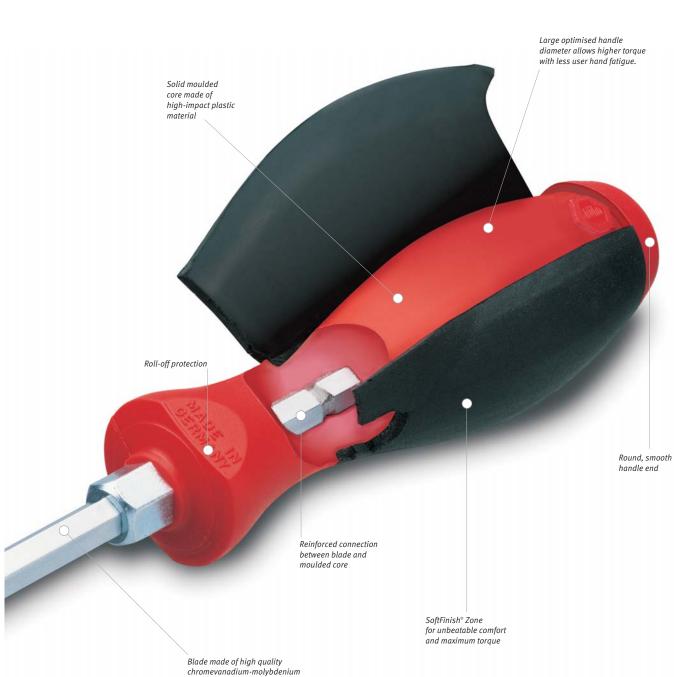

۲

Blade made of high quality chromevanadium-molybdenium steel, super hardened and chrome-plated for unmatched durability

wiha witha 11

Wiha SoftFinish[®].

The specialist for dry and general applications.



۲



wine

The Wiha SoftFinish® zone features a solid moulded core with soft outer grip. This requires less force, yet achieves 40% more torque than conventional handles. The handle is shaped to fit comfortably in the hand, providing maximum torque forces in dry and general working conditions.

If a stuck screw has to be loosened, a precise hammer blow can be applied to the solid steel cap. Due to the hex blade extending trough the handle to the steel cap, there is no loss of impact energy.







The solid steel cap at the end of the SoftFinish® handle enables controlled hammer blows, for example, when loosening a tight screw.

Due to the solid steel cap and hex blade extending through the handle, there is no loss of impact energy when a precise hammer blow is applied.

Thermoplastic elastomer tolerates high loads and feels soft and pleasant to the touch.

Blade with hex bolster for wrenches to use on particularly tight screws.

The right tool at a glance, thanks to the printed screw symbol on the handle end.

Wiha SoftFinish®.

- Multi-component SoftFinish[®] handle provides maximum user comfort
- Ergonomically perfect handle design
- Printed screw symbol on handle end for fast identification
- Available in versions with round blade, hex blade or hex blade with solid steel cap
- Blade made of high quality CVM-steel, through-hardened and chrome plated
- Wiha ChromTop[®]-finish on tip for a perfect fit every time



For slotted screws.

		_			-	11-11-1	wiha
$\mathbf{\Psi}$					-		wind
302	SoftFin	ish® slotte	ed cabii	net scre	ewdriver	:	
	Round	blade.					
Blade:	High qu	ality chron	ne-vana	dium-m	olybden	um steel,	through hardened,
	chrome	-plated. W	iha Chro	omTop®	finish or	n tip for a	perfect fit every time.
Handle:	Ergonor	nic Wiha S	SoftFinis	h® mult	i-compo	nent hanc	dle with
	roll-off p	rotection.					
Standards:	DIN 526	5, DIN ISC	2380.				
Application:	Especia	lly for dry a	and gen	eral app	olications	3.	
Order-No.	Ф	—	\ominus	•1		—+	-
00684	2.0•	65	0,4	2,0	169	23	10
00685	2.5	75	0,4	2,5	179	23	10
00686	3.0•	80	0,5	3,0	184	23	10
00687	3.0	100	0,5	3,0	204	23	10
00689	3.0•	150	0,5	3,0	254	23	10
00690	3.0•	200	0,5	3,0	304	23	10
32383	3.0	300	0,5	3,0	404	23	5
00691	3.5	100	0,6	3,5	204	23	10
26931	3.5•	200	0,6	3,5	304	23	10
00692	4.0	100	0,8	4,0	211	30	10
00694	4.0•	150	0,8	4,0	261	30	10
00695	4.0●	200	0,8	4,0	311	30	10
00696	4.0•	300	0,8	4,0	411	30	5
27753	4.5•	80	0,8	4,5	191	30	10
00697	4.5●	125	0,8	4,5	236	30	10
00698	5.5	125	1,0	5,5	236	30	10
00700	5.5	150	1,0	5,5	261	30	10
00701	5.5•	200	1,0	5,5	311	30	10
00702	5.5•	300	1,0	5,5	411	30	5
32384	6.0	300	1,0	6,0	418	36	5
• Additional	altern and a take	Nee DIN	-1				

• Additional dimension. Non-DIN size.

۲

\oplus	-				-	that we	wiha 🧧		
302	SoftFin	ish® slotte	d worl	kshop s	crewdriv	ver.			
Blade:	0 1	ality chron			·	,	through hardened, perfect fit every time.		
Handle:		Ergonomic Wiha SoftFinish® multi-component handle with							
Standards: Application:	DIN 526	rotection. 5, DIN ISC Ily for dry a			olications	6.			
Order-No.	\oplus		\ominus ;	•1					
27754	6.0	100	1,0	5,5	218	36	10		
27755	6.0	150	1,0	5,5	268	36	10		
00704	6.5	100	1,2	6,0	218	36	10		
00703	6.5	150	1,2	6,0	268	36	10		
00706	6.5•	200	1,2	6,0	318	36	5		
00708	8.0	150	1,2	7,0	274	41	10		
00707	8.0	175	1,2	7,0	299	41	5		
00709	8.0	175	1,6	7,0	299	41	5		
32399	8.0	300	1,2	7,0	424	41	5		
00711	10.0	200	1,6	8,0	324	41	5		
32400	10.0	300	1,6	8,0	424	41	5		
00712	12.0	250	2,0	8,0	374	41	5		
00713	14.0	250	2,5	11,0	374	41	5		
Additional	dimension	. Non-DIN	size.						

For slotted screws.

۲

\oplus					-	11.11.15) 11.11.15	W	iha 🧧
308	SoftFin	ish® slotte	ed scre	wdriver.	-			
	Hex bla	de with h	ex bol	ster.				
Blade:	High qu	ality chron	ne-vana	adium-me	olybder	ium stee	l, throug	h hardened,
	chrome	-plated. W	iha Chi	romTop®	finish o	n tip for	a perfec	t fit every time
Handle:	Ergono	mic Wiha S	SoftFini	sh® multi	-compo	onent ha	ndle with	۱
		protection.						
Standards:	DIN 526	65, DIN ISC	2380					
Application:	Especia	Illy for dry a	and ger	neral app	lication	S.		
Order-No.	Ф		\ominus ;	●L	\bigcirc 1			-
00731	3.5	75	0,6	4,0	-	186	30	10
00732	4.5●	90	0,8	4,0	-	201	30	10
00733	5.5	100	1,0	5,0	8	213	36	10
00734	6.5	125	1,2	6,0	10	238	36	10
00735	7.0∙	125	1,1	6,0	10	238	36	10
00736	8.0	150	1,2	8,0	13	268	41	10
00737	9.0•	150	1,4	8,0	13	268	41	10
00738	10.0	175	1,6	8,0	13	293	41	5
00739	12.0	200	2,0	10,0	16	318	41	5
00740	14.0	250	2,5	10,0	16	368	41	5

Additional dimension. Non-DIN size.



solid steel cap.

Order-No.	Ф	☴■	\ominus ;		\bigcirc 1	=	—		
03223	3.5	75	0,6	4,0	-	186	30	10	
03224	4.5•	90	0,8	4,0	-	201	30	10	
03225	5.5	100	1,0	5,0	8	213	36	10	
03226	6.5	125	1,2	6,0	10	238	36	10	
03228	8.0	150	1,2	8,0	13	271	41	5	
03230	10.0	175	1,6	8,0	13	296	41	5	
03231	12.0	200	2,0	10,0	16	321	41	5	
03232	14.0	250	2,5	10,0	16	371	41	5	
Additional dimension. Non-DIN size.									

398 SoftFinish® slotted screw-holding screwdriver. Clamping sleeve holds the screw.

	olamp	ing bloove	noido							
Blade:	Chrome	Chrome-vanadium steel, through hardened, black-finish.								
Handle:	0	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.								
Application:	For set	ting and tur	rning sc	rews in (difficult to	access areas.				
Order-No.	Ф	—	\ominus ;		-+	í	_			
32867	2.5	75	0,4	186	30		5			
32868	3.0	100	0,5	211	30		5			
32869	4.0	125	0,8	243	36		5			

36

36

1,0 268

1,2 293

32870

32871

۲

5.0

6.0

150

175

5

5

wiha

Wiha SoftFinish[®].

The specialist for dry and general applications.

For Phillips screws.

\oplus	¢					wiha 😐			
311	SoftFini	sh [®] Philli	ps scre	wdriver.	Round b	blade.			
Blade:	0 1	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.							
Handle:	0	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.							
Standards:	DIN ISO	8764.							
Application:	Especia	ly for dry a	and ger	neral app	lications.				
Order-No.	\oplus	☴■	•1			-			
00754	PH0	60	3,0	164	23	10			
27756	PH0	100	3,0	204	23	10			
00756	PH1	80	4,5	191	30	10			
27757	PH1	100	4,5	211	30	10			

PH1• 4,5 PH1• 4.5 PH2 6,0 PH2 6,0 PH2• 6,0 PH2• 6,0 PH3 8,0 PH4 10,0 • Additional dimension. Non-DIN size.



Hex blade with hex bolster.

Order-No.	Ð			\bigcirc t	==		
00764	PH1	80	5,0	8	186	30	10
00765	PH2	100	6,0	10	213	36	10
00766	PH3	150	8,0	13	268	41	10
00767	PH4	200	10,0	16	318	41	5



SoftFinish® Phillips screwdriver.

One-piece hexagon blade with hexagon head, solid steel cap.

Order-No.	Ð		O I	\bigcirc			
03237	PH1	80	5,0	8	186	30	10
03238	PH2	100	6,0	10	213	36	10
03239	PH3	150	8,0	13	268	41	10

THEM	No.11	wiha
	and the second se	

wiha

397	SoftFinish® Phillips screw-holding screwdriver.
	Clamping sleeve holds the screw.
Blade:	Chrome-vanadium steel, through hardened, black-finish.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	For setting and turning screws in difficult to access areas.

Order-No.	Ð			—	
32406	PH0	100	211	30	5
32404	PH1	125	236	36	5
32405	PH2	175	286	36	5

For Pozidriv screws.

	e					wiha 😐
313	SoftFin	ish® Pozio	driv scr	ewdrive	r.	
	Round	blade.				
Blade:	High qu	ality chron	ne-vana	dium-mo	olybdenum s	teel, through hardened,
	chrome	-plated. W	/iha Chr	omTop®	finish on tip f	or a perfect fit every time
Handle:	Ergono	mic Wiha S	SoftFinis	sh® multi	-component	handle with
	roll-off p	protection.				
Standards:	DIN ISC	8764.				
Application:	Especia	ally for dry	and ger	neral app	lications.	
Order-No.	*	\rightarrow	•1		—	
00768	PZ0	60	3,0	164	23	10
00770	PZ1	80	4,5	191	30	10
26454	PZ1	300	4,5	411	30	5
00772	PZ2	100	6,0	218	36	10
26455	PZ2	300	6,0	418	36	5
	PZ3	150	8,0	274	41	10

	4				4	HANN	wiha 🌒		
314		sh® Pozi			er.				
Blade:	High qu	,	ne-vana	dium-m	·	· · ·	through hardened, perfect fit every time.		
Handle:	Ergonor	chrome-plated. Wiha ChromTop [®] finish on tip for a perfect fit every time. Ergonomic Wiha SoftFinish [®] multi-component handle with							
Standards:		roll-off protection. DIN ISO 8764.							
Application:	Especially for dry and general applications.								
Order-No.	*		• 1	\bigcirc					
00776	PZ1	80	5,0	8	186	30	10		
00777	PZ2	100	6,0	10	213	36	10		
00778	PZ3	150	8,0	13	268	41	10		
00779	PZ4	200	10,0	16	318	41	5		

	wiha
532	SoftFinish [®] Pozidriv screwdriver.
	One-piece hexagon blade with hexagon head, solid steel cap.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,

Handle:	chrome-plated. Wiha ChromTop [®] finish on tip for a perfect fit every time. Ergonomic Wiha SoftFinish [®] multi-component handle with
Standards:	roll-off protection. DIN ISO 8764.
Application:	Especially for dry and general applications.
Order-No.	

Order-No.	*	→	1	\bigcirc		— <u>÷</u>	
03245	PZ1	80	5,0	8	186	30	10
03246	PZ2	100	6,0	10	213	36	10
03247	PZ3	150	8,0	13	268	41	10



wiha

60 70 80

wiha

Screwdriver with mm scale.

Handle:

Standards:

Application:

Order-No.

36073

35399

Extra:

Ergonomic Wiha SoftFinish® multi-component handle with

191 30

High-contrast millimetre scale permanently lasered on to the blade for

- 🕂 Scale

20-70

10

10

Especially for dry and general applications.

depth, inner, outer and step measurements.

6,0 218 36 20-90

4,5

80

100


roll-off protection.

DIN ISO 8764.

PZ1

PZ2

Screwdriver with mm scale.

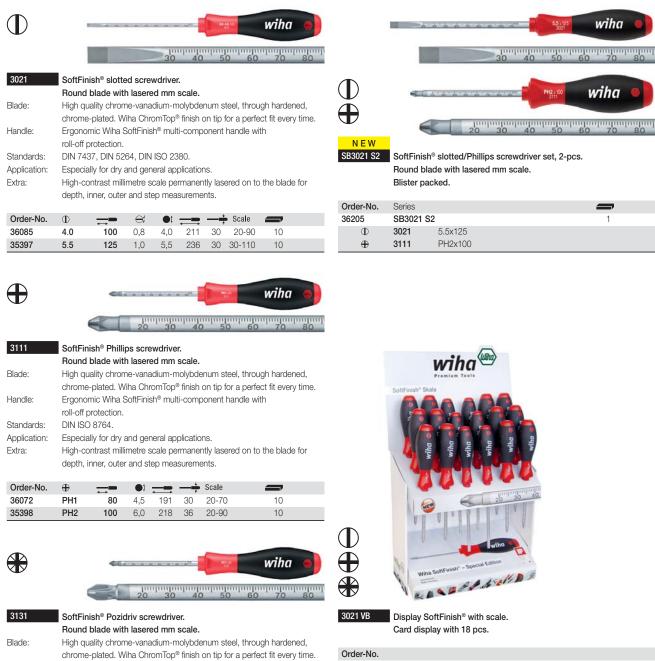

Order-No.		
35555	Card display w	vith 18 pcs.
Ф	3021	6x5.5
Ð	3111	6xPH2
*	3131	6xPZ2

wiha ^{tha 1}	5
-----------------------	---

Wiha SoftFinish[®].

The specialist for dry and general applications.

Stubby-screwdriver.



302	SoftFinish [®] slotted screwdriver.								
	Short round blade.								
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.								
	Wiha ChromTop® finish on tip for a perfect fit every time.								
Handle:	Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.								
Standards	: DIN 5265, DIN ISO 2380, handle acc. to DIN 5268 - style K.								
Application	The For working in confined spaces.								
Order-No									
26964	40 25 0.8 40 81 34 10								

26964 4.0 25 0,8 4,0 81 34 10 26965 5.5 25 1,0 5,5 81 34 10 26966 6.5 25 1,2 6,5 81 34 10 26966 6.5 25 1,2 6,5 81 34 10 26967 8.0 25 1,2 8,0 81 34 10		~	\leftrightarrow	<u> </u>		→	Ŧ	
26966 6.5 25 1,2 6,5 81 34 10	26964	4.0	25	0,8	4,0	81	34	10
	26965	5.5	25	1,0	5,5	81	34	10
26967 8.0 25 1,2 8,0 81 34 10	26966	6.5	25	1,2	6,5	81	34	10
, ,	26967	8.0	25	1,2	8,0	81	34	10



۲

311	SoftFinish® Phillips screwdriver.
	Short round blade.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Standards: Application:	DIN ISO 8764, handle based on DIN 5268 - style K. For working in confined spaces.

Order-No.	\oplus		•			-
26968	PH1	25	4,5	81	34	10
26969	PH2	25	6,0	81	34	10
26970	PH3	25	8,0	81	34	10



313	SoftFinish [®] Pozidriv screwdriver. Short round blade.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Standards: Application:	DIN ISO 8764, handle based on DIN 5268 - style K. For working in confined spaces.
Order No	

Order-No.	*					_
26971	PZ1	25	4,5	81	34	10
26972	PZ2	25	6,0	81	34	10
26973	PZ3	25	8,0	81	34	10



For TORX[®] screws.



32254

32255

32256

۲

T25

T27

T30



362	SoftFinish [®] Round blad		® scre	wdriver.						
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop $^{\otimes}$ finish on tip for a perfect fit every time.									
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.									
Application:	Especially fo	r dry a	nd ger	ieral app	lications.					
Order-No.	۰ –	-	•1							
26259	Т3	60	2,5	164	23	10				
26260	T4	60	2,5	164	23	10				
01285	T5	60	2,5	164	23	10				
01286	T6	60	3,5	164	23	10				
01287	T7	60	3,5	164	23	10				
01288	T8	60	3,5	164	23	10				
01289	Т9	60	4,0	171	30	10				
01290	T10	80	4,0	191	30	10				
01291	T15	80	4,0	191	30	10				
01292	T20 1	00	4,0	218	36	10				
01293	T25	00	4,5	218	36	10				
01294	T27 1	115	5,5	233	36	10				
01295	T30 1	15	6,0	233	36	10				
01296	T40 1	130	7,0	254	41	10				
01297	T45	130	8,0	254	41	5				



	-										
362BE	SoftFinish® TORX® ball end screwdriver.										
	Hex blade.										
Blade:	High-quality chrome-molybdenum steel, through-hardened,										
	chrome-p	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.									
Handle:	Ergonomi	c Wiha	SoftFinis	h® multi	-compo	nent hanc	lle with				
	roll-off pro	otection									
Application:	For all ha	rd-to-rea	ach TOR	X® screv	NS.						
Extra:	The TOR	<® ball e	nd enab	les faste	ening and	d unfaster	ning at an angle of up				
	to 25°.										
	With elon	gated T	ORX® pro	ofile beł	nind ball	end.					
Order-No.	۲	→	• 1			- +					
32250	Т9	60	7/64	2,8	164	23	10				
32251	T10	60	1/8	3,2	184	23	10				
32252	T15	80	9/64	3,6	191	30	10				
32253	T20	80	5/32	4,0	211	30	10				

4,8

5,6 233

6,4 233

218

36

36

36

10

10

10

3/16

1/4

100

115 7/32

115

27744

27745

۲

T30

T40

115

130

6,0 233

7,0 254

For TORX[®] and TORX[®] tamper resistant screws.

	* Magics	- AND				wiha 🔹					
362R	-		•		g® screwd						
Blade:	High qua	Retaining spring holds TORX [®] screws in place. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop [®] finish on tip for a perfect fit every time.									
Handle:						nt handle with					
	roll-off pr	rotection.									
Application:	For settir	ng and tig	htening	TORX®	screws in	difficult to access areas.					
Order-No.	۲		•1	_	÷	—					
27736	T6	60	3,5	164	23	10					
27737	T7	60	3,5	164	23	10					
27738	T8	60	3,5	164	23	10					
27739	Т9	60	4,0	171	30	10					
27740	T10	80	4,0	191	30	10					
27741	T15	80	4,0	191	30	10					
27742	T20	100	4,0	218	36	10					
27743	T25	100	4,5	218	36	10					
27811	T27	115	5,5	233	36	10					

For TORX PLUS® screws.

۲

۲	-					wiha 🥥
362IP	SoftFin	ish® TOR	X PLUS	S [®] screw	driver.	
	Round	blade.				
Blade:	High qu	ality chron	ne-vana	adium-m	olybdenum	n steel, through hardened,
	chrome	-plated. W	'iha Chi	romTop®	finish on ti	p for a perfect fit every time.
Handle:	Ergonor	nic Wiha S	SoftFini	sh® multi	-compone	nt handle with
	roll-off p	rotection.				
Application:	Especia	lly for dry	and ger	neral app	lications.	
Extra:	The stro	nger profi	le of the	e TORX F	PLUS® tip a	allows up to 25% extra torque
	than the	e TORX® p	rofile.			
Order-No.	۲		e t		<u>+</u>	
26091	6IP	<u>→</u> 60	3,5	164	23	10
26093	7IP	60	3.5	164	23	10

26091	6IP	60	3,5	164	23	10
26093	7IP	60	3,5	164	23	10
26095	8IP	60	3,5	164	23	10
26097	9IP	60	4,0	171	30	10
26099	10IP	80	4,0	191	30	10
26101	15IP	80	4,0	191	30	10
26103	20IP	100	4,0	218	36	10
26105	25IP	100	4,5	218	36	10
26107	27IP	115	5,5	233	36	10
26109	30IP	115	6,0	233	36	10
26111	40IP	130	7,0	254	41	10



36

41

10

10

10

362TR Blade: Handle:	With bo High qua chrome- Wiha Ch With bor Ergonom	rehole in ality chrom plated. romTop [®] ehole in th	the bla ne-vana finish or ne blade	de tip.F dium-mo n tip for a e tip.	olybdenun a perfect fi -compone	ewdriver. ⁹ screws with locking pin. n steel, through hardened, it every time. ent handle with
Order-No.	۲		•1			—
03106	T7H	60	3,5	164	23	10
03107	T8H	60	3,5	164	23	10
03108	T9H	60	4,0	171	30	10
26456	T9H	300	4,0	411	30	5
01300	T10H	80	4,0	191	30	10
26457	T10H	300	4,0	411	30	5
01301	T15H	80	4,0	191	30	10
26458	T15H	300	5,0	411	30	5
01302	T20H	100	4,0	211	30	10
28005	T20H	300	5,0	411	30	5
01303	T25H	100	4,5	211	30	10
01304	T27H	115	5,5	233	36	10
01305	T30H	115	6,0	233	36	10

7,0

130

254

41

T40H

01306




362RIP	-	SoftFinish® TORX PLUS® MagicSpring® screwdriver. Retaining spring holds TORX PLUS® screws in place.									
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,										
Handle:	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.										
Application:		For setting and tightening TORX PLUS® screws in hard to reach areas.									
Extra:	The stron	The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.									
Order-No.	۲		•I		<u> </u>	—					
28760	6IP	60	3,5	164	23	10					
28761	7IP	60	3,5	164	23	10					
28762	8IP	60	3,5	164	23	10					
28763	9IP	60	4,0	171	30	10					
28763 28764	9IP 10IP	60 80	4,0 4,0	171 191	30 30	10 10					
			,-								
28764	10IP	80	4,0	191	30	10					
28764 28765	10IP 15IP	80 80	4,0 4,0	191 191	30 30	10 10					
28764 28765 28766	10IP 15IP 20IP	80 80 100	4,0 4,0 4,0	191 191 218	30 30 36	10 10 10					
28764 28765 28766 28767	10IP 15IP 20IP 25IP	80 80 100 100	4,0 4,0 4,0 4,5	191 191 218 218	30 30 36 36	10 10 10 10					

Wiha SoftFinish[®].

The specialist for dry and general applications.

For hex socket screws.



367	SoftFinish [®] ball end hex screwdriver.
	Hex blade.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	For all screws that are difficult to access.
Extra:	The ball and anables the user to work at angles up to 25°

les the user to work at angles up to 25°.

Order-No.	۲			—†	
26303	1.5	75	179	23	10
26304	2	100	204	23	10
26305	2.5	100	204	23	10
26328	3	100	204	23	10
26329	4	100	211	30	10
26330	5	100	211	30	10
26331	6	125	243	36	10
26332	8	150	268	36	10
26333	10	150	271	41	5
26307	12	150	271	41	5

For angle and slotted screws.




357 SoftFinish® offset hex screwdriver. Hex blade. Blade: Chrome-vanadium steel, through hardened, chrome-plated.

Dound blode

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Application: Ideal for high-torque applications, e.g. in workshops.

Order-No.	۲	⊆■	:			-
26230	3	35	20	139	23	10
26231	4	40	25	151	30	10
26232	5	45	28	156	30	10
26233	6	50	32	168	36	10
26234	8	60	36	178	36	10
26235	10	75	40	199	41	10



367R	SoftFinish [®] MagicRing [®] ball end hex screwdriver.
	Ring made of spring steel holds hex screws in place.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	For setting and turning screws in difficult to access areas.
Extra:	The ball end enables the user to work at angles up to 25°.

Order-No.	۲	—			
26077	3	100	204	23	10
26079	4	100	211	30	10
26081	5	100	211	30	10
26083	6	125	243	36	10
26085	8	150	268	36	10
26087	10	150	271	41	5

wiha



356

۲

SoftFinish® hex screwdriver. Hex blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated. Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Order-No.	۲				—
32264	1.5	60	164	23	10
32265	2.0	60	164	23	10
26190	2.5	75	179	23	10
26191	3	75	179	23	10
26192	4	75	186	30	10
26193	5	75	186	30	10
26194	6	100	218	36	10
26195	8	100	218	36	10



\bigcirc	3	Dama	wiha 🧧
305	SoftFinish [®] slotted nut driver.		

	Round blade.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	DIN 3125.
Application:	For nuts DIN 546.
Order-No.	

32364	M1.7	80	0,5	4,0	184	23	5
32363	M2	80	1,0	4,5	184	23	5
32362	M2.3	90	1,0	5,0	201	30	5
32361	M2.6	90	1,2	5,5	201	30	5
32360	M3	100	1,2	6,0	211	30	5
32358	M3.5	100	1,4	7,0	218	36	5
32359	M4	100	1,4	8,0	218	36	5
32357	M5	125	2,0	10,0	243	36	5
32356	M6	125	2,5	11,0	243	36	5
32355	M8	150	3,0	14,0	274	41	5
32354	M10	150	3,5	18,0	274	41	5

For hex nuts.

۲



341	SoftFinish® hex nut driver. vRound blade.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
	Deep drawn socket.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Standards:	DIN 3125.
Application:	Especially for dry and general applications.

Order-No.	0			-	Þ	
01018	4	125	236	30	6,9	10
01020	5	125	236	30	7,9	10
01021	5.5	125	236	30	7,9	10
01022	6	125	236	30	8,9	10
01023	7	125	243	36	10,9	10
01024	8	125	243	36	11,9	10
01025	9	125	243	36	12,9	10
01026	10	125	243	36	14,4	10
01027	11	125	249	41	15,9	5
01028	12	125	249	41	16,9	5
01029	13	125	249	41	18,4	5
01030	14	125	249	41	19,4	5
01031	15	125	249	41	21,9	5
01032	16	125	249	41	21,9	5
01033	17	125	249	41	23,4	5

0	wiha e
347	SoftFinish® hex nut driver. Round blade with hex bolster.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
	Deep drawn socket.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Standards:	DIN 3125.
Application:	Especially for dry and general applications.
Order-No.	
01000	7 105 10 000 00 110 10

	-	\leftrightarrow	<u> </u>	\leftrightarrow	÷ .	-	
01092	7	125	10	238	36	11,0	10
01093	8	125	10	238	36	12,0	10
01094	9	125	10	238	36	13,0	10
01095	10	125	10	238	36	14,5	10
01096	11	125	13	246	41	16,0	5
01097	12	125	13	246	41	17,0	5
01098	13	125	13	246	41	19,0	5

347 Zoll	SoftFinish [®] hex nut driver. Inch sizes.				
	Round blade with hex bolster.				
Blade:	Chrome-vanadium steel, through hardened, nickel-plated.				
	Deep drawn socket.				
Handle:	łandle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.				
Application:	Especially for dry and general applications.				
rippiloadon.	Especially for ally and general applications.				
Order-No.	O ——■ (1 ——■ ——➡ mm ib= 🛲				

	-	\leftrightarrow		\rightarrow	т		•		
02836	3/16	125	10	231	30	4,76	8	10	
02837	1/4	125	10	238	36	6,35	10	10	
02838	5/16	125	10	238	36	7,94	12	10	
02839	3/8	125	10	238	36	9,53	14	10	
02840	7/16	125	13	246	41	11,11	16	10	
02841	1/2	125	13	246	41	12,70	19	10	

For hex and triangular nuts.

⊗




Diaue.	Onione-variadium steer, through hardened, chrome-plated.
	Deep drawn socket.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	For working in confined spaces.

Order-No.	0	→			Ļ	-
01076	5.5	65	176	30	8	10
01077	6	65	176	30	9	10
01078	7	65	183	36	11	10
01079	8	65	183	36	12	10
01081	10	65	183	36	14	10

0=						wiha 🧧
372	SoftFir	nish® hex	nut drive	er.		
Handle:	Ergono	e shaft for mic Wiha protection.	SoftFinis			nt handle with
Application:	E.g. for	tightening	g and loo	sening a	idjustable	hose clamps.
Order-No.	0			-+	Þ	—
01435	5	150	261	30	8	10
01436	5.5	150	261	30	8	10
01437	6	150	261	30	9	10

01100	0.0	100	201	00	0	10
01437	6	150	261	30	9	10
01438	7	150	268	36	11	10
01439	8	150	268	36	12	10
01440	10	175	293	41	14	10
01443	13	175	293	41	19	5



Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Standards:	DIN 22416.
Application:	For triangular screws DIN 22424 and triangular nuts DIN 22425.

Order-No.	0		O ,	╤,		ĻÞ	—
26212	M4	125	6,8	236	30	11	10
26213	M5	125	8,3	236	30	13	10
26216	M6	125	10,05	236	30	16	10
26214	M8	125	12,05	243	36	18	10
26217	M10	125	15,05	243	36	22	10
26218	M12	125	16,55	249	41	24	10

wiha (19

wiha

Wiha SoftFinish[®].

The specialist for dry and general applications.

Sets with round blades.

	Round blades.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	Especially for dry and general applications.

Order-No.	Series				—	•
07152	302 HK	6 SO			1	
Ð	302	3.5x100	4.5x125	5.5x150	6.5x150	
\oplus	311	PH1x80	PH2x100			



۲



302 ZK6 S0	SoftFinish® slotted/ Pozidriv screwdriver set, 6 pcs.
	Round blades.

Order-No.	Series				-	7
07153	302 ZK	6 SO				1
Ð	302	3.5x100	4.5x125	5.5x150	6.5x150	
*	313	PZ1x80	PZ2x100			

Sets with round blades.



	Round blades.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	Especially for dry and general applications.

26113 302 HK6 01 1 ① 302 4.0x100 5.5x125 6.5x150 ⊕ 311 PH1x80 PH2x100 ⊕ 313 PZ2x100	Order-No.	Series				-
⊕ 311 PH1x80 PH2x100	26113	302 HK	6 01			1
• • • • • • • • • • • • • • • • • • • •	Ð	302	4.0x100	5.5x125	6.5x150	
313 PZ2x100	Ð	311	PH1x80	PH2x100		
	*	313	PZ2x100			



	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Application:	Especially for dry and general applications.

Order-No.	Series				
26146	311 K6				1
\oplus	311	PH1x80	PH2x100	PH3x150	
*	313	PZ1x80	PZ2x100	PZ3x150	



Sets with hex blades.

Sets with steel caps. Nut driver set.



Order-No.	Series				4	
21248	308 HK6					1
Ð	308	3.5x75	4.5x90	5.5x100	7.0x125	
Ð	312	PH1x80	PH2x100			



۲



308 ZK6

SoftFinish[®] slotted/ Pozidriv screwdriver set, 6 pcs. Hex blades with hex bolster.

Order-No.	Series				-
21249	308 ZK6				1
Ð	308	3.5x75	4.5x90	5.5x100	7.0x125
*	314	PZ1x80	PZ2x100		

530 HK6 SoftFinish® slotted/ Phillips screwdriver set, 6 pcs. Hex blades with hex bolster, solid steel cap. Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Application: Especially for dry and general applications.

Order-No.	Series				—
21250	530 HK6				1
Ð	530	3.5x75	4.5x90	5.5x100	6.5x125
Ð	531	PH1x80	PH2x100		







۲

SoftFinish[®] slotted/ Pozidriv screwdriver set, 6 pcs. Hex blades with hex bolster, solid steel cap.

Order-No.	Series				-	-
21251	530 ZK6					1
Ð	530	3.5x75	4.5x90	5.5x100	6.5x125	
*	532	PZ1x80	PZ2x100			

Wiha SoftFinish[®].

The specialist for dry and general applications.

TORX [®] se	ets.	TORX [®] sets.			
	wiha	wita			
362 K6 S0	SoftFinish® TORX® screwdriver set, 6 pcs.	362BE K6 SoftFinish® TORX® ball end screwdriver set, 6 pcs.			
Blade:	Round blades. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop [®] finish on tip for a perfect fit every time.	Hex blade. Blade: High-quality chrome-molybdenum steel, through-hardened, chrome-p ted. Wiha ChromTop® finish on tip for a perfect fit every time.			
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.	Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.			
Application:	Especially for dry and general applications.	Application: For all hard-to-reach TORX® screws. Extra: The TORX® ball end enables fastening and unfastening at an angle of			
Order-No.	Series -	to 25°. With elongated TORX [®] profile behind ball end.			
07155	362 K6 SO 1				
۲	362 T10x80 T15x80 T20x100 T25x100 T30x115 T40x130	Order-No. Series 32249 362BE K6 1			
		● 362BE T9x60 T10x60 T15x80			
۲	wiha	A CONTRACTOR OF			
362 K7	SoftFinish [®] TORX [®] screwdriver set, 7 pcs. Round blades.	362R K6 S0 SoftFinish® TORX® MagicSpring® screwdriver set, 6 pcs. Retaining spring holds TORX® screws in place.			
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.	Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.			
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.	Wiha ChromTop® finish on tip for a perfect fit every time. Handle: Ergonomic Wiha SoftFinish® multi-component handle with			
Application:	Especially for dry and general applications.	roll-off protection. Application: For setting and tightening TORX [®] screws in difficult to access areas.			
Order-No.	Series -				
01299	362 K7 1	Order-No. Series			
	362 T8x60 T9x60 T10x80 T15x80	27746 362R K6 SO 1			

362R

۲

T10x80T15x80T20x100T25x100T30x115T40x130



T20x100 T25x100 T30x115

۲

۲

۲

Sets.		Sets.	
	viha o wiha o wiha o wiha o wiha o		viha
362 K6 01	SoftFinish® Pozidriv/TORX® screwdriver set, 6 pcs.	362TR K6	SoftFinish® TORX® Tamper Resistant screwdriver set, 6 pcs.
Blade:	Round blades. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.	Blade:	For TORX® screws with locking pin. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.	Handle:	With borehole in the blade tip. Ergonomic Wiha SoftFinish® multi-component handle with
Application:	Especially for dry and general applications.	riandlo.	roll-off protection.
		Application:	For turning TORX® Tamper Resistant safety screws.
Order-No.	Series -	Order-No.	Series -
26114	362 K6 01 1	24506	362TR K6 1
*	313 PZ1x80 PZ2x100 362 T10x80 T15x80 T20x100 T25x100	۲	362TR T10Hx80 T15Hx80 T20Hx100 T25Hx100 T30Hx115 T40Hx130

۲



wiha (11/2) 23

Wiha MicroFinish.

The specialist for wet and oily applications.





With a Microfinish 5538 W

Optimum power transfer, even with very oily hands!

Wiha MicroFinish screwdrivers stand for contemporary handle design, together with the ideal combination of materials for wet and oily applications.

The micro-fine surface of the finish zone made of sandblasted cellulose-acetate ensures maximum power transfer and provides an effective non-slip grip, even with very oily hands.

The roll-off protection in the front area of the handle prevents the tool from rolling off the workbench. The screwdriver is also available with a solid steel cap for loosening tight screws with a single hammer blow. As the steel cap is connected to the blade, the entire energy from the impact is transmitted to the screw head without damaging either the handle or the blade.





8,9×150

The MicroFinish hex blades with ChromTop[®] tip are made of highquality chrome-vanadium-molybdenum steel, are through-hardened and chrome-plated. This guarantees a particularly long tool life.

Wiha's MicroFinish screwdrivers are ideal for automotive applications, for use on building sites or when working with sanitary installations. However, they can also be used to perform repairs to machinery and equipment where oil and lubricants pose potential problems.





The hex blade and hex bolster model with solid steel cap is ideal for loosening tight screws.

The non-slip handle is made from cellulose acetate and has a micro-fine surface structure. This gives maximum torque transmission and perfect handling in wet and oily work surroundings.

Wiha MicroFinish.

- Micro-fine handle surface for a non-slip grip in an oily working environment
- Ergonomic handle shape fits every hand
- Blades made of high-quality chrome-vanadium-steel, through-hardened and chromeplated for a long tool life
- Wiha ChromTop[®] blade tip sits securely in the screw head and offers great dimensional accuracy

For slotted screws.

For Phillips screws.

\square	6,5 x 100 Witha Microfiniah* 5520 Cabr	igoplus
5520	MicroFinish slotted screwdriver.	5521
	Round blade.	
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,	Blade:
	chrome-plated.	
	Wiha ChromTop [®] finish on tip for a perfect fit every time.	
Handle:	Non-slip Wiha MicroFinish handle with roll-off protection.	Handle:
Standards:	DIN 5265, DIN ISO 2380.	Standar
Application:	Best suited for turning screws in wet and oily applications.	Applicat
Order-No.		Order-

29115	3.5	100	0,6	3,5	204	23	10	
29116	4.0	100	0,8	4,0	211	30	10	
29117	4.0•	150	0,8	4,0	261	30	10	
29118	5.5	125	1,0	5,5	236	30	10	
29119	5.5	150	1,0	5,5	261	30	10	
29120	6.5	150	1,2	6,0	268	36	10	
29121	8.0	150	1,2	7,0	274	41	10	
29122	8.0	175	1,2	7,0	299	41	10	
29123	10.0	200	1,6	8,0	324	41	5	
Additional dimension. Non-DIN size.								

\oplus			_	_	-	6,5 × 125	Wiha MicroFin	ninta® 5533 (W)	
5533	MicroFi	nish slott	ed scre	wdriver					
	One-pie	ece hexag	jon blad	de with	hexago	on head,	solid st	teel cap.	
Blade:	chrome	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.							
	Wiha Ch	nromTop®	finish or	n tip for a	a perfec	et fit ever	y time.		
Handle:	Non-slip	Wiha Mic	roFinish	handle	with rol	I-off prot	ection.		
Standards:	DIN 526	5, DIN ISC	2380.						
Application:	Best sui	ted for tur	ning scr	rews in v	vet and	oily app	lications		
Order-No.	Ф	——	\ominus	•1	\bigcirc	 .	-+		
29133	4.5●	90	0,8	4,0	-	201	30	10	
29134	5.5	100	1,0	5,0	8	213	36	10	
29135	6.5	125	1,2	6,0	10	238	36	10	
29136	8.0	150	1,2	8,0	13	271	41	5	
29137	10.0	175	1,6	8,0	13	296	41	5	

Additional dimension. Non-DIN size.

۲

Handle: Standards: Application:	Non-slip Wiha MicroFinish handle with roll-off protection. DIN ISO 8764. Best suited for turning screws in wet and oily applications.						
Order-No.	\oplus	—	•I				
29140	PH0	60	3,0	165	23	10	
29141	PH1	80	4,5	192	30	10	
29142	PH1•	200	4,5	312	30	5	
29143	PH2	100	6,0	220	36	10	
29144	PH2•	200	6,0	320	36	5	
29145	PH3	150	8,0	277	41	10	
Additional dimension. Non-DIN size.							

Wiha ChromTop® finish on tip for a perfect fit every time.

High quality chrome-vanadium-molybdenum steel, through hardened,

MicroFinish Phillips screwdriver.

Round blade.

chrome-plated.

 \oplus

۲

	PH2 x 100 Witha MicroFinish® 5534	
sh Phillins screwdriver		

5534	MicroFinish Phillips screwdriver.
	One-piece hexagon blade with hexagon head, solid steel cap.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Non-slip Wiha MicroFinish handle with roll-off protection.
Standards:	DIN ISO 8764.
Application:	Best suited for turning screws in wet and oily applications.

Order-No.	Ð		- 1 -	\odot		—	—	
29149	PH1	80	5,0	8	187	30	10	
29150	PH2	100	6,0	10	214	36	10	
29151	PH3	150	8,0	13	271	41	10	

Wiha Info

Wiha MicroFinish.

Due to the sandblasted surface, oil and moisture flow away from the handle surface for a powerful, non-slip grip – a maximum force and comfort with dry, oily or wet hands is ensured.

The ergonomic handle shape ensures also exceptional torque transfer.



Wiha MicroFinish.

The specialist for wet and oily applications.

For Pozidriv and TORX[®] screws.

For hex nuts.







MicroFinish Pozidriv screwdriver. One-piece hexagon blade with hexagon head, solid steel cap.

 Blade:
 High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

 Wiha ChromTop® finish on tip for a perfect fit every time.

 Handle:
 Non-slip Wiha MicroFinish handle with roll-off protection.

 Standards:
 DIN ISO 8764.

 Application:
 Best suited for turning screws in wet and oily applications.

oraci no.	 			+ .	→	+		
29158	PZ1	80	5,0	8	187	30	10	
29159	PZ2	100	6,0	10	214	36	10	
29160	PZ3	150	8,0	13	271	41	5	



۲



 5527
 MicroFinish TORX® screwdriver.

 Round blade.
 Blade:

 Blade:
 High quality chrome-vanadium-molybdenum steel, through hardened,

chrome-plated. Wiha ChromTop[®] finish on tip for a perfect fit every time.

Handle: Non-slip Wiha MicroFinish handle with roll-off protection.

Application: Best suited for turning screws in wet and oily applications.

Order-No.	۲					-
29161	Т9	60	4,0	172	30	10
29162	T10	80	4,0	192	30	10
29163	T15	80	4,0	192	30	10
29164	T20	100	4,0	212	30	10
29165	T25	100	4,5	212	30	10
29166	T27	115	5,5	235	36	10
29167	T30	115	6,0	235	36	10
29168	T40	130	7,0	257	41	5



Flexible shaft for hard to reach areas. Non-slip Wiha MicroFinish handle with roll-off protection.

Handle: Application:

Application: E.g. for tightening and loosening adjustable hose clamps.

Order-No.	0	→			ملب	
29175	6	150	262	30	9	10
29176	7	150	270	36	11	10
29177	8	150	270	36	12	10

TORX[®] set.



Order-No.	Series				-
29169	5527 K6				1
۲)	T10x80	T15x80	T20x100	
		T25x100	T30x115	T40x130	



5521

Ð

۲

PH1x80

PH2x100

Sets with round blades. Sets with steel caps. 5520 HK6 MicroFinish slotted/ Phillips screwdriver set, 6 pcs. 5533 HK5 MicroFinish slotted/ Phillips screwdriver set, 5 pcs. Round blades. Hex blades with hex bolster, solid steel cap. High quality chrome-vanadium-molybdenum steel, through hardened, Blade: High quality chrome-vanadium-molybdenum steel, through hardened, Blade: chrome-plated. chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Wiha ChromTop[®] finish on tip for a perfect fit every time. Handle: Non-slip Wiha MicroFinish handle with roll-off protection. Handle: Non-slip Wiha MicroFinish handle with roll-off protection. Application: Best suited for turning screws in wet and oily applications. Application: Best suited for turning screws in wet and oily applications. Order-No. Series Order-No. Series 5520 HK6 29124 29138 5533 HK5 1 Ф 5520 3.5x100 4.0x100 5.5x125 6.5x150 \oplus 5533 5.5x100 6.5x125 8.0x150



Order-No.	Series				-
29125	5520 ZK6				1
Ð	5520	3.5x100	4.0x100	5.5x125	6.5x150
*	5522	PZ1x80	PZ2x100		



PH1x80

5534

Ð

۲



MicroFinish slotted/ Pozidriv screwdriver set, 5 pcs.
Hex blades with hex bolster, solid steel cap.
High quality chrome-vanadium-molybdenum steel, through hardened,
chrome-plated.
Wiha ChromTop [®] finish on tip for a perfect fit every time.
Non-slip Wiha MicroFinish handle with roll-off protection.
Best suited for turning screws in wet and oily applications.

PH2x100

Order-No.	Series				-
29139	5533 ZK5				1
Ф	5533	5.5x100	6.5x125	8.0x150	
*	5535	PZ1x80	PZ2x100		

Wiha Classic.

The robust screwdriver for multiple applications.



Wiha Square handle, impact-resistant and cadmium-free – also withstands a few hammer strokes.

Day after day, the Wiha Square Grip screwdriver proves to be a universal classic for a wide variety of different applications. Its robust handle is manufactured from high quality plastic and is impact resistant, non-splintering and recyclable.

Users appreciate its versatility and high quality, which is also conveyed by the hardened chrome-vanadiummolybdenum steel blade.



Wiha Square Grip – the tough and versatile classic.



- made of impact-resistant plastic material, chemical and oil-resistant
- Smooth handle surface allows easy cleaning
- Wiha ChromTop®-finish on tip for a perfect fit every time
- Takes up a small amount of space in the toolbox



The slim square handle even fits into the smallest pocket.

For slotted screws.

۲

00100

00101

00102

00103

5.5

7.0

9.0

10.0

120 0,95

140 1,05

160

180

1,2

1,4

6,0

7,0 225

8,0

8,0 305

225

275

\oplus		186/6 x100 Macie in Germany	
-	 1.4	186/5 x200 Mode in Germany	•

186		Classic slotted screwdriver. Round blade.
Blade	:	Chrome-vanadium steel, through hardened, nickel-plated.
		Tip and blade width identical up to size 6.0.
Handl	e:	Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Applic	ation:	For universal use in trade and industry.
Extra:		Series includes extra long dimensions for screws that are difficult
		to access.

Order-No.	Ф		\ominus ;	• • • •		—†	
00201	2.0	40	0,4	2,0	100	14	10
00202	2.0	60	0,4	2,0	120	14	10
00203	2.5	50	0,4	2,5	110	14	10
00204	2.5	75	0,4	2,5	150	19	10
00206	3.0	75	0,5	3,0	150	19	10
00207	3.0	100	0,5	3,0	175	19	10
00208	3.0	150	0,5	3,0	225	19	10
00209	3.0	200	0,5	3,0	285	22	10
00210	3.0	300	0,5	3,0	385	22	5
00211	3.5	100	0,6	3,5	175	19	10
00212	4.0	100	0,8	4,0	185	22	10
00213	4.0	150	0,8	4,0	235	22	10
00214	4.0	200	0,8	4,0	285	22	10
00215	4.0	300	0,8	4,0	385	22	5
00218	5.0	100	0,9	5,0	195	24	10
00219	5.0	150	0,9	5,0	245	24	10
00220	5.0	200	0,9	5,0	295	24	10
00221	5.0	300	0,9	5,0	395	24	5
00222	5.5	100	1,0	5,5	195	24	10
00223	5.5	150	1,0	5,5	245	24	10
00226	6.0	100	1,1	6,0	205	28	10
00227	6.0	150	1,1	6,0	255	28	10
00229	6.0	300	1,1	6,0	405	28	5
00230	7.0	150	1,2	6,0	255	28	10
00231	8.0	150	1,2	7,0	265	32	10
00234	8.0	300	1,2	7,0	415	32	5
00235	10.0	200	1,6	8,0	315	32	5
00236	10.0	300	1,6	8,0	415	32	5
00237	10.0	500	1,6	8,0	615	32	5


For Phillips, Pozidriv and TORX[®] screws.

\oplus					_	153/PH 3x150				
153	Classic	Phillips s	crewd	river.						
	Round I	blade.								
Blade:	Chrome	Chrome-vanadium steel, through hardened, nickel-plated.								
Handle:	Impact r	Impact resistant Wiha Classic handle, resistant to chemicals and oils.								
Standards:	ISO 8764.									
Application:	For univ	ersal use	in trade	and indu	ustry.					
Order-No.	Ð		•1			—				
00109	PH0	60	3,0	135	19	10				
00111	PH1	80	4,5	175	24	10				
00112	PH1•	200	4,5	295	24	10				
00115	PH2	100	6,0	205	28	10				
00116	PH2•	250	6,0	355	28	10				
00117	PH2•	350	6,0	455	28	5				
00119	PH3	150	8,0	265	32	10				
00120	PH3•	300	8,0	415	32	5				

Additional dimension. Non-DIN size.

						222/9/20130 Made in Germany				
222	Classic P Round bl	ade.								
Blade:		Chrome-vanadium steel, through hardened, chrome-plated.								
Handle:	'		Viha Cla	assic har	idle, resist	tant to chemicals and oils.				
Standards:	ISO 8764									
Application:	For univer	sal use	in trade	and indu	ustry.					
Order-No.	*	—				—				
00416	PZ0	60	3,0	135	19	10				
00418	PZ1	80	4,5	175	24	10				
00422	PZ2	100	6,0	205	28	10				
00423	PZ2•	250	6,0	355	28	5				
00426	PZ3	150	8.0	265	32	10				

• Additional dimension. Non-DIN size.

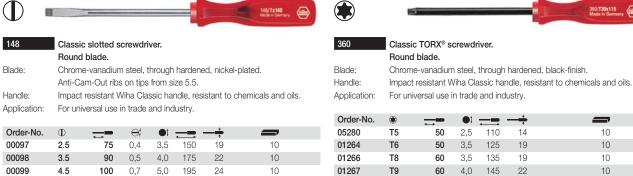

28

32

32

36

10

10

10

10

Order-No.	۲		•1		—†	
05280	T5	50	2,5	110	14	10
01264	T6	50	3,5	125	19	10
01266	T8	60	3,5	135	19	10
01267	Т9	60	4,0	145	22	10
01268	T10	80	4,0	175	24	10
01269	T15	80	4,0	175	24	10
01270	T20	100	4,0	205	28	10
01271	T25	100	4,5	205	28	10

wiha 29

360/T30x11

The robust screwdriver for multiple applications.

353/SW 8x100

For hex nuts and hex socket screws.

C	
6	۷

353

342

۲

Classic	hex	screwdriver.

Hex blade. Blade: Chrome-vanadium steel, through hardened, nickel-plated. Handle: Impact resistant Wiha Classic handle, resistant to chemicals and oils. Application: For universal use in trade and industry.


Order-No.	۲				
01224	1.5	60	120	14	10
01225	2	60	120	14	10
01226	2.5	75	150	19	10
01227	3	75	150	19	10
01228	4	75	160	22	10
01229	5	75	170	24	10

Slotted/ Phillips and slotted/ Pozidriv sets.



148 HK5	Classic slotted/Phillips screwdriver set, 5-pcs.
	Round blades.
Blade:	Chrome-vanadium steel, through hardened, nickel-plated.
	Anti-Cam-Out ribs on tip sizes 5.5 / 7.0.
Handle:	Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Application:	For universal use in trade and industry.

42/SW 13±125	Order-No.	Series				
	00105	148 HK5				
	Ф	148	4.5x100	5.5x120	7.0x140	
	\oplus	153	PH1x80	PH2x100		



Blade:	Chrome-vanadium steel, through hardened, nickel-plated.
	Deep drawn socket.
Handle:	Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Standards:	DIN 3125.
Application:	For universal use in trade and industry.

Order-No.	0	—			ţ	
01051	3	125	220	24	5,0	10
01053	3.5	125	220	24	6,4	10
01054	4	125	220	24	6,9	10
01055	4.5	125	220	24	6,9	10
01056	5	125	220	24	7,9	10
01057	5.5	125	220	24	7,9	10
01058	6	125	220	24	8,9	10
01059	7	125	230	28	10,9	10
01060	8	125	230	28	11,9	10
01061	9	125	230	28	12,9	10
01062	10	125	230	28	14,4	10
01063	11	125	240	32	15,9	10
01064	12	125	240	32	16,9	10
01065	13	125	240	32	18,4	10

			ſ
A THE A	anna 🖲	anter 🔁	 terreter 🕢

(

148 ZK5	Classic slotted/Pozidriv screwdriver set, 5-pcs.
	Round blades.
Blade:	Chrome-vanadium steel, through hardened, nickel-plated.
	Anti-Cam-Out ribs on tip sizes 5.5 / 7.0.
Handle:	Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Application.	For universal use in trade and industry

Order-No.	Series				-
00108	148 ZK5				1
Ð	148	4.5x100	5.5x120	7.0x140	
٠	222	PZ1x80	PZ2x100		



Wiha scrapers, trim pin remover, square reamers and awls.

۲

Scraper,	, trim pi	n remo	ver.			Square r	eamer,	awl.			
					Russian and Andrew Constant of States					-	9.9
K 430 20 Blade: Handle: Application:	Wiha Po	-vanadiur ower hanc	dle, impa	ict, oil and gre	ned, chrome-plated. vase resistant. e.g. in automotive applications.	300-2 Blade: Handle: Application:	Chrom Made d	e-vanadiur	n steel, acetate	e, transparent re	ed, nickel-plated.
Order-No.	:	→			—	Order-No.			—	—	
01532	25	150	260	36	10	00679	6.0	100	185	34	10
9					All LT PERFORMANCE All LT PERFORMANCE	•					

۲

K 430 10 Trim pin remover.

۲

 Blade:
 Chrome-vanadium steel, through hardened, chrome-plated.

 Handle:
 Wiha Power handle, impact, oil and grease resistant.

 Application:
 For fast removal of trim pins, e.g. on internal car panels.

Order-No.	÷-		=	<u> </u>	—
01531	7.5	175	285	36	10
-					

301-2	Awl with round	tip and pla	astic handle.		
Blade:	Chrome-vanadi	um steel, th	rough hardene	d, nickel-plated.	
Handle:	Made of cellulos	se acetate, t	ransparent red	l.	
Application:	For pre-punchin	g holes and	l drill holes.		
Order-No.	•	== -		4	_
00683	6.0 100	185	34		10



Wiha wooden handle.

The all-rounder for woodworking applications.



The Wiha wooden handle is made of untreated, sealed beechwood.

۲

Its hex bolster and specially developed handle profile underlines its professional claim. This is expressed through the blade that extends to the end of the handle. This enables the user to loosen tightened screws with a hammer stroke, since the through blade conducts energy from the hammer stroke directly to the screw.

The handle end of the screwdriver is protected against damage by a high-quality, robust leather cap.




Wiha wooden-handle screwdriver – the allrounder made of beech is particularly suitable for all woodworking applications.





The through-blade, hex bolster and leather cap are the professional features that are particularly prized by users.

With hex bolster for greater torque transfer.



 Handle made of sealed beechwood

15,5 × 100 162 | 5,5 × 100 Made in Germany

- High torque can be transmitted even on the tightest screw with the help of the hex bolster for wrenches
- Blade extending through handle transmits the energy of the hammer stroke directly to the tightened screw
- Handle end protected with highquality leather cap
- Precision blade tip, blade material of chromevanadium steel

wiha 🎰 32

۲

For slotted, Phillips and Pozidriv screws.

\oplus					≼ [and the	. 49784		ullina
162		n slotted							
Blade:	a	blade wi			bordon	od pielke	Inlatad		
DIAUE.		e-vanadiuı ze 5.5, bla							ov hole-
	ter.	LO 0.0, DR			ugiina	iuio. Ant	i Guill-O	ut 1103, 11	07 0013-
Handle:		ooden ha	ndle ma	de of sea	aled bee	ech woo	d, handle	e end pro	otected
	with hig	h-quality	leather c	cap.					
Application:	For all a	pplicatior	ns in woo	odworkin	g and f	urniture i	ndustrie	s.	
Order-No.	\oplus	\rightarrow	\ominus	•1	\bigcirc		— ‡		
00147	3.5	75	0,6	4,0	-	175	23	10	
00151	4.5	90	0,8	5,0	-	190	23	10	
00152	5.5	100	0,95	5,5	8	205	26	10	
00153	7.0	125	0,95	6,0	10	230	26	10	
00154	9.0	150	1,1	7,0	10	270	30	10	
00156	10.0	175	1,2	8,0	13	295	30	10	
00157	12.0	200	1,4	8,0	13	325	32	10	
00158	14.0	250	1,75	10,0	16	380	34	5	
00159	16.0	250	2,0	11,0	16	390	36	5	



۲

129	Wooden Phillips screwdriver.
	Round blade with hex bolster.
Blade:	Chrome-vanadium steel, through hardened, nickel-plated.
Handle:	Wiha wooden handle made of sealed beech wood, handle end protected
	with high-quality leather cap.
Standards:	DIN ISO 8764.
Application:	For all applications in woodworking and furniture industries.

Order-No.	Ð	\leftrightarrow		\bigcirc	\rightarrow	+	
00057	PH1	80	4,5	8	180	23	10
00058	PH2	100	6,0	10	205	26	10
00059	PH3	150	8,0	13	270	30	10
00060	PH4	200	10,0	16	330	34	5

S	Acts in Germany

221	Wooden Pozidriv screwdriver.
	Round blade with hex bolster.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Wiha wooden handle made of sealed beech wood, handle end protected with high-quality leather cap.
Standards:	DIN ISO 8764.
Application:	For all applications in woodworking and furniture industries.
Order-No	

0.00.100	w.	\leftrightarrow		U.	←	+	
00412	PZ1	80	4,5	8	180	23	10
00413	PZ2	100	6,0	10	205	26	10
00414	PZ3	150	8,0	13	270	30	10

Reamers, awls. Set combinations.

		-			6.0./ 300-11 (B)
300-11	Reamer	with squ	ıare tip,	wooden handl	le and striking cap.
Blade:			,	0	ed, nickel-plated.
				iking cap.	
Handle:				s lacquered.	4
Application:	⊢or enlai	ying nole	es and di	rill holes in wood	J.
Order-No.					-
00170					
32179	6.0	100	190	36	10
•	6.0	100	190	36	10 • 60/301-11
32179				36	6.0/301-11 (B)
301-11	Awl with	n round t	ip, wood	den handle and	6.0/301-11 (B)
301-11	Awl with Chrome-	n round t	ip, wood n steel, t	den handle and	d striking cap.
301-11 Blade: Handle:	Awl with Chrome- One-piec Made of	round t vanadiur ce blade beech, s	ip, wood n steel, t up to str emi-glos	den handle and through hardene iking cap. ss lacquered.	d striking cap.
301-11 Blade: Handle:	Awl with Chrome- One-piec Made of	round t vanadiur ce blade beech, s	ip, wood n steel, t up to str emi-glos	den handle and through hardene iking cap.	d striking cap.
•	Awl with Chrome- One-piec Made of	round t vanadiur ce blade beech, s	ip, wood n steel, t up to str emi-glos	den handle and through hardene iking cap. ss lacquered.	d striking cap.



162 HK6 S0	Wooden	Wooden slotted/ Phillips screwdriver set, 6 pcs.						
	Round bl	Round blades with hex bolster.						
Blade:	Chrome-v	anadium stee	el, through ha	ardened, nicl	kel-plated.			
	From size	5.5, blade ex	tends throug	h handle. Ai	nti-cam-out	ribs, hex		
	bolster.							
Handle:	Wiha woo	den handle n	nade of seale	d beech wo	od, handle (end protected		
	with high-	quality leathe	r cap.					
Application:	For all app	plications in w	oodworking/	and furniture	e industries.			
Order-No.	Series				-	-		
07149	162 HK6	SO				1		
Ð	162	3.5x75	4.5x90	5.5x100	7.0x125			
Ð	129	PH1x80	PH2x100					
-								

162 ZK6 S0 Wooden slotted/ Pozidriv screwdriver set, 6 pcs. Round blades with hex bolster.

Order-No.	Series				-	
07150	162 ZK6 S	0			1	
Ð	162	3.5x75	4.5x90	5.5x100	7.0x125	
*	221	PZ1x80	PZ2x100			



Wiha PicoFinish.

The comfortable precision screwdriver.



Witta PicoFinish 2619

Colour-coded drive symbols on the rotating cap for easy recognition of the individual screwdrivers.

The PicoFinish is distinguished by top-quality materials and an ergonomic handle design. The comfortable precision screwdriver with multi-component handle, rapid rotating zone and easy-movement rotating cap is a professional tool for all precision work for confined screw applications. To make things even easier for the user working with tiny screws, we've developed a second, smaller handle. The colour-coded marking of the drive symbol on the rotating cap is also new. This makes it easier to recognise the individual screwdrivers when several are being used at once.



The blades are made of top-quality chrome-vanadium-molybdenum steel to ensure a particularly long tool life. They are subsequently through-hardened in a controlled process and chrome-plated. The precise ChromTop® tip ensures a secure hold in the screw head.





The easy-movement rotating cap protects the palm of the hand.

ו

- Wiha PicoFinish.
- Ergonomic handle design with soft zone for comfortable work
- Easy-movement rotating cap for rapid hand action
- Colour-coded marking of the drive symbol for easy identification
- Through-hardened, chromeplated blade made of chromevanadium-molybdenum steel for a long tool life
- Wiha ChromTop[®] tip guarantees a secure hold in the screw head
- Ideal for all fine, filigree applications in electronics and precision-mechanics applications, as well as for DIY and model-building



For slotted screws.

PicoFinish slotted screwdriver.

components.

Wiha PicoFinish handle for rapid rotation.

Handle with rotating cap and rapid-turning zone.

High quality chrome-vanadium-molybdenum steel, through hardened,

Ideal for high-precision work with electro-technical and precision

chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.

260P

Blade:

Handle:

۲

Application:

For Phillips and Pozidriv screws.

Blade:

Handle:

۲

\oplus	-	Wiha PicoFinish 2017
261P	PicoFinish Phillips screwdriver.	

PicoFinish Phillips screwdriver. Handle with rotating cap and rapid-turning zone.

High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Wiha PicoFinish handle for rapid rotation.

Application: Ideal for high-precision work with electro-technical and precision components.

.				•			
Order-No.	\oplus		\ominus	•1			-
00475	0.8	40	0,16	2,0	134	9	10
00476	1.0	40	0,18	2,0	134	9	10
00477	1.2	40	0,2	2,0	134	9	10
00478	1.5	40	0,25	2,0	134	9	10
00479	1.5	60	0,25	2,0	154	9	10
00480	1.8	40	0,3	2,0	134	9	10
00481	1.8	60	0,3	2,0	154	9	10
00482	2.0	40	0,4	2,0	140	18	10
00484	2.0	60	0,4	2,0	160	18	10
00485	2.0	100	0,4	2,0	200	18	10
00486	2.5	50	0,4	2,5	150	18	10
00487	2.5	75	0,4	2,5	175	18	10
00488	2.5	100	0,4	2,5	200	18	10
00490	3.0	50	0,5	3,0	150	18	10
00492	3.0	100	0,5	3,0	200	18	10
00493	3.0	150	0,5	3,0	250	18	10
00495	3.5	60	0,6	3,5	160	18	10
00497	4.0	60	0,8	4,0	160	18	10
00498	4.0	100	0,8	4,0	200	18	10
00499	4.0	150	0,8	4,0	250	18	10

Wiha PicoFinish

Order-No.	Ð		•1			—
00513	PH000	40	2,0	134	9	10
00512	PH00	40	2,0	134	9	10
00514	PH00	60	2,0	154	9	10
00511	PH0	50	3,0	150	18	10
00515	PH0	75	3,0	175	18	10
00516	PH1	60	4,0	160	18	10
00517	PH1	80	4,0	180	18	10
00518	PH1	150	4,0	250	18	10

	-	Wiha PicoFinish 352
U	_	
262P	PicoFinish Pozidriv screwdriver.	

EOEI	r icol inisiti oziany sciewanyel.					
	Handle with rotating cap and rapid-turning zone.					
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.					
Handle:	Wiha PicoFinish handle for rapid rotation.					
Application:	Ideal for high-precision work with electro-technical and precision components.					
Order-No.						

04461	PZ0	50	3,0	150	18	10
04462	PZ1	60	4,0	160	18	10

wiha (100 35

Wiha PicoFinish.

The comfortable precision screwdriver.

For TORX[®] screws.

۲

۲	Wiha PicoFinish 207	
267P	PicoFinish TORX [®] screwdriver.	267
	Handle with rotating cap and rapid-turning zone.	
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.	Blad
Handle:	Wiha PicoFinish handle for rapid rotation.	Han
Application:	Ideal for high-precision work with electro-technical and precision components.	Арр
		Extra
Order-No.		

	-	\leftrightarrow		$ \rightarrow $	т	
25673	T1	40	2,5	134	9	10
25674	T2	40	2,5	134	9	10
20122	Т3	40	2,5	134	9	10
20123	T4	40	2,5	134	9	10
00566	T5	40	2,5	134	9	10
00567	T6	40	2,5	140	18	10
00568	T7	40	2,5	140	18	10
00569	T8	40	2,5	140	18	10
00570	Т9	50	3,0	150	18	10
00571	T10	50	3,0	150	18	10
00572	T15	60	3,5	160	18	10
00573	T20	60	4,0	160	18	10

For TORX PLUS[®] screws.

	60					Wiha PicoFinish 207 PP			
267PIP	PicoFinish	TOR)	(PLUS	screwo	lriver.				
	Handle wi	th rota	ting cap	o and ra	pid-turni	ng zone.			
Blade:	High qualit	y chror	ne-vana	dium-mo	olybdenur	m steel, through hardened,			
	chrome-pla	ated. W	/iha Chr	omTop®	finish on	tip for a perfect fit every time.			
Handle:	Wiha PicoF	Wiha PicoFinish handle for rapid rotation.							
Application:	Ideal for hig	gh-prea	cision w	ork with	electro-te	chnical and precision			
	componen	ts.							
Extra:	The strong	The stronger profile of the TORX PLUS® tip allows up to 25% extra torque							
	than the T(DRX® p	orofile.						
Order-No.	۰ -	_	•1		_				
29100	4IP	40	2,5	134	9	10			
29101	5IP	40	2,5	134	9	10			
29102	6IP	40	2,5	140	18	10			
29103	7IP	40	2,5	140	18	10			
29104	8IP	40	2,5	140	18	10			
29105	9IP	50	3,0	150	18	10			
29106	10IP	50	3,0	150	18	10			
29107	15IP	60	3,5	160	18	10			

18

10

60 4,0 160

20IP

29108

۲

Wiha PicoFi

267PR	PicoFinish TORX [®] MagicSpring [®] screwdriver.
	Handle with rotating cap and rapid-turning zone.Retaining spring
	holds TORX [®] screws in place.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Wiha PicoFinish handle for rapid rotation.

Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.	۲		•		<u> </u>	-
27729	T6	40	2,5	140	18	10
27730	T7	40	2,5	140	18	10
27731	T8	40	2,5	140	18	10
27732	Т9	50	3,0	150	18	10
27733	T10	50	3,0	150	18	10
27734	T15	60	3,5	160	18	10

Niha Info



TORX[®] MagicSpring[®].

Simply ingenious - the TORX® MagicSpring® screwdriver from Wiha.

Because of the "MagicSpring®" retaining spring made of stainless steel, TORX® screws are held securely in place. An innovation, which will convince each user.



For hex socket screws.

PicoFinish hex screwdriver.

Handle with rotating cap and rapid-turning zone.

263P

۲

For hex nuts. Chip lifter.

0	Wiha PicoFinish 260 P
265P	PicoFinish hex nut driver.
	Handle with rotating cap and rapid-turning zone.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Wiha PicoFinish handle for rapid rotation.
Application:	Ideal for high-precision work with electro-technical and precision components.
Order-No.	
00544	1.6 CO 0.6 0.0 100 10 10

		↔		•		T	
00544	1.5	60	2,5	3,0	160	18	10
00545	1.8	60	2,9	3,5	160	18	10
00546	2	60	3,2	4,0	160	18	10
00547	2.5	60	4,0	4,0	160	18	10
00548	3	60	5,0	5,0	160	18	10
00549	3.2	60	5,0	5,0	160	18	10
00550	3.5	60	5,3	6,0	160	18	10
00551	4	60	5,5	6,0	160	18	10
00552	4.5	60	6,2	7,0	160	18	10
00553	5	60	6,8	7,0	160	18	10
00554	5.5	60	7,6	8,0	160	18	10
00555	6	60	8,2	9,0	160	18	10
00556	7	60	9,6	10,0	160	18	10

oll PicoFinish hex nut driver. Inch sizes. Handle with rotating cap and rapid-turning zone.

Chrome-vanadium steel, through hardened, chrome-plated. Wiha PicoFinish handle for rapid rotation. ion: Ideal for high-precision work with electro-technical and precision components.

Order-No.	0	$\overline{\rightarrow}$			mm	
00561	3/32	60	160	18	2,38	10
00564	7/64	60	160	18	2,78	10
00559	1/8	60	160	18	3,18	10
00565	9/64	60	160	18	3,57	10
00562	5/32	60	160	18	3,97	10
00560	3/16	60	160	18	4,76	10
00563	7/32	60	160	18	5,56	10
00558	1/4	60	160	18	6,35	10



26810P	PicoFinish chip lifter.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Handle:	Wiha PicoFinish handle.
Application:	For lifting tight parts on circuit boards.

00574 1 3,5 50 150 18 5	Order-No.	1	1-	☴╸	=		—
	00574	1	3,5	50	150	18	5

	indinano ini			p		ing Lonioi	
Blade:	High qualit	y chro	ome-vana	adium-m	olybdenu	m steel, through hardened,	Blade:
	chrome-pla	ated. '	Wiha Ch	romTop®	finish on	tip for a perfect fit every time.	Handle:
Handle:	Wiha Picof	-inish	handle f	or rapid r	otation.		Applicat
Application:	Ideal for hig	gh-pre	ecision w	ork with	electro-te	echnical and precision	
	componen	its.					
							Order-
Order-No.	• -	—	۲		— ÷		00544
00519	0.7	40	0.028	134	9	10	00545
00520	0.9	40	0.035	134	9	10	00546
00521	1.3	40	0.05	134	9	10	00547
00522	1.5	50	-	144	9	10	00548
00523	2.0	50	5/64	150	18	10	00549
00524	2.5	60	-	160	18	10	00550
00525	3.0	60	-	160	18	10	00551
263P Zoll	PicoFinish Handle wi					ing zone.	00554
			9			J	00555
Order-No.	•					-	00556
00526	1/16	50	144	9		10	
00528	3/32	60	160	18		10	265P Z
00530	7/64	60	160	18		10	
00527	1/8	60	160	18		10	Blade:
							Handle:
							Applicat
	~			1		Wiha PicoFinish 34P	•
\bigcirc	~					Wild ProPrintin 34P	Order-
		10					00561
	1 6 23						00564 00559

Wiha PicoFir

264P		ish ball e with rota				ing zone.			
Blade:	chrome	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.							
Handle: Application: Extra:	Wiha Pie Ideal for compor	coFinish h high-prec ients.	andle fo	or rapid re ork with	otation. electro-te	echnical and precision			
Order-No.	۲			•	_	—			
00531	1.3	40	134	0.05	9	10			
00532	1.5	50	150	-	18	10			
00533	2.0	50	150	-	18	10			
00534	2.5	60	160	-	18	10			

264P Zoll PicoFinish ball end hex screwdriver. Inch sizes. Handle with rotating cap and rapid-turning zone.

60 160

3.0

00535

Order-No.	۲	——	=		—
00537	1/16	50	150	18	10
00541	5/64	50	150	18	10
00539	3/32	50	150	18	10
00542	7/64	60	160	18	10
00538	1/8	60	160	18	10
00543	9/64	60	160	18	10
00540	5/32	60	160	18	10

18

-

10

۲

wiha witha 37



Wiha PicoFinish.

The comfortable precision screwdriver.

Slotted/ Phillips sets.

 $\bigoplus_{i=1}^{n}$

 $\textcircled{0}{\textcircled{0}}$

۲



260P K6	PicoFinish slotted/ Phillips screwdriver set, 6 pcs.
	Handle with rotating cap and rapid-turning zone.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Wiha PicoFinish handle for rapid rotation.
Application:	Ideal for high-precision work with electro-technical and precision components.
Extra:	Practical plastic rack with hanging holes.
Order-No.	Series

Order-No.	Series				_	
00503	260P K6				1	
Ð	260P	1.5x40	2.0x40	2.5x50	3.0x50	
Ð	261 P	PH00x40	PH0x50			





267P K6M	PicoFinish TORX [®] screwdriver set, 6 pcs.
	Handle with rotating cap and rapid-turning zone.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Wiha PicoFinish handle for rapid rotation.
Application:	Profi set for mobile phones and electrical devices.
Extra:	Practical plastic rack with hanging holes.
Order-No.	Series -
24002	267P K6M 1

T5x40

T9x50

T6x40

T7x40

۲

	I	1	Ĩ	1			
Min Profess 2017	Vingeny tax	With Fastmath 2007	With Prosfeedy 2012	The Purful Div	what Practices	With Faultant, 2017	
	S inc	Since a	0		1	0 11	

260P K7				vdriver set, pid-turning z	•		
Blade:	0 1	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.					
				perfect fit ev	ery time.		
Handle:	Wiha Picol	-inish handle	e for rapid ro	tation.			
Application:	Ideal for hi componen		ı work with e	lectro-techni	cal and precision		
Order-No.	Series						
00504	260P K7				1		
\oplus	260P	1.5x40	2.0x40	2.5x50	3.0x50		

PH00x40 PH0x50

PH1x60



T4x40

T8x40

267P

۲

267P K6	PicoFinish	TORX [®] scre	ewdriver set	, 6 pcs.			
	Handle wit	h rotating c	ap and rapid	d-turning zo	one.		
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.						
Handle:	Wiha PicoF	inish handle	for rapid rota	ation.			
Application:	Ideal for high-precision work with electro-technical and precision components.						
Extra:	Practical pla	Practical plastic rack with hanging holes.					
Order-No.	Series				-	-	
03765	267P K6					1	
۲	267P	T7x40 T15x60	T8x40 T20x60	T9x50	T10x50		



Ð

261 P

TORX[®] MagicSpring[®] set. Display.

Ball end hex L-key set.

267PR K6 PicoFinish TORX[®] MagicSpring[®] screwdriver set, 6 pcs. Handle with rotating cap and rapid-turning zone. Retaining spring holds TORX® screws in place. Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Handle: Wiha PicoFinish handle for rapid rotation. For setting and tightening TORX® screws in difficult to access areas. Application: Extra: Practical plastic rack with hanging holes. Order-No. Corioo

order-no.	OCITES				_	
27747	267PR K6	6				1
۲	267PR	T6x40 T10x50	T7x40 T15x60	T8x40	T9x50	



264P K6	PicoFinish ball end hex screwdriver set, 6 pcs.
	Handle with rotating cap and rapid-turning zone.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Wiha PicoFinish handle for rapid rotation.
Application:	Ideal for high-precision work with electro-technical and precision
	components.
Extra:	Practical plastic rack with hanging holes.
	The ball end enables the user to work at angles up to 25°.
Order-No	Sorios

Order-No.	Series					
00536	264P K6				1	
۲	263P	0.9x40				
۲	264P	1.3x40	1.5x50	2.0x50	2.5x60	
		3.0x60				



VB1	PicoFinish	display.

۲

Order-No.						
36151	Acrylglas	display mit 7	0 Stück.			
Ð	260P	7x1.5	7x1.8	7x2.0	7x2.5	
		7x3.0	7x3.5			
Ð	261P	7xPH000	7xPH00	7xPH0	7xPH1	



)		
26	5D	KG	

Blade:

Handle:

۲

PicoFinish hex nut driver set, 6 pcs. Handle with rotating cap and rapid-turning zone. Chrome-vanadium steel, through hardened, chrome-plated. Wiha PicoFinish handle for rapid rotation. Ideal for high-precision work with electro-technical and precision

Application: components. Practical plastic rack with hanging holes.

Extra:	Practical	Practical plastic rack with hanging holes.						
Order-No.	Series							
00557	265P K6					1		
0	265P	2.5x60 5x60	3x60 5.5x60	3.5x60	4x60			



Wiha universal scraper.

Easily removes sealing, paint and glue.

The Wiha universal scraper is the optimal tool to quickly and easily remove seals, paint, glue and labels from glass and metallic surfaces.

The universal scraper is a robust tool with an ergonomic SoftFinish® multi-component handle. Due to the special handle shape ultimate user comfort is provided. The high quality blades have a very long life. If a blade change is necessary, it can be done quickly and easily using the unique blade changing device.



The Wiha universal scraper is a tool which should be present in every professional toolbox. It also makes life easier for every home worker.



The Wiha universal scraper can be used for the easy removal of gasket remains.

The razor sharp blade quickly removes sealing, paint and glue.

wina-softrinish 430 40

Wiha universal scraper.

- Removes quickly seals, paint, glue and labels
- High-quality blades have a very long life
- Square blade geometry, ideal for corners and edges
- Unique blade changing device ensures easy blade change
- Ergonomically shaped SoftFinish® multi-component handle for maximum user comfort



۲

۲

	l scraper.	Replacement blades.
	wiha o	
430 40	Universal scraper starter set.	SB 430 40 K10 Replacement blades for universal scraper.
la se alla s	With 1 razor-edged blade, 13 mm wide.	13 mm wide.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.	Blister packed, 10 pcs.
Application:	Protection. Removes sealing materials, glue residue, tape, labels.	Order-No.
ppiloulon.		27606 1
Order-No.	—	
23159	Universal scraper with 1 blade 5	
	wiha	SB 430 40 K1020 Replacement blades for universal scraper. 20 mm wide. Blister packed, 10 pcs.
SB 430 4010		20 mm wide. Blister packed, 10 pcs.
SB 430 4010	Universal scraper set. With 10 razor-edged replacement blades, 13 mm wide.Blister packed.	20 mm wide.
SB 430 4010 Handle:	Universal scraper set. With 10 razor-edged replacement blades, 13 mm wide.Blister	20 mm wide. Blister packed, 10 pcs.
Handle:	Universal scraper set. With 10 razor-edged replacement blades, 13 mm wide.Blister packed. Ergonomic Wiha SoftFinish® multi-component handle with roll-off	20 mm wide. Blister packed, 10 pcs.
	Universal scraper set. With 10 razor-edged replacement blades, 13 mm wide.Blister packed. Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.	20 mm wide. Blister packed, 10 pcs.

wiha^{wind 41}

Wiha small screwdriver and magnetiser.

For slotted and Phillips screws.



500 Slotted pocket screwdriver.

۲

Chrome-vanadium steel, through hardened, nickel-plated. Blade: Handle: Wiha round handle, transparent red with pen clip.

Order-No.	\oplus	╤╸	•1	╤ ₽		-
01537	3.0	40	3,0	100	11	50
01538	3.0	60	3,0	120	11	50
01539	3.0	80	3,0	140	11	50

- Hand

Magnetisers/demagnetisers.

400 10	Manual in the second state and	
	Magnetisers/demagnetisers.	
Size:	52 x 50 x 29 mm (b x h x d)	
Application:	For magnetising and demagnetising of blades and blade-similar tools steel.	of
Order-No.	—	
01508	5	




209	Slotted	pocket so	rewari	ver.		
Blade:	Chrome	-vanadium	steel, t	through h	nardened,	nickel-plated.
Handle:	Wiha rou	und handle	e, transp	parent ye	llow.	
Order-No.	\oplus		•		_	_
01548	2.0	40	2,0	85	8	50

SB 400 10 Size: Application:	Magnetiser/ demagnetiser. Blister packed. 52 x 50 x 29 mm (b x h x d) For magnetising and demagnetising of blades and blade-similar tools of steel.
Order-No.	—
02568	5



 \mathbf{H}



(|

Order-No.	Ф	Ð		-∎-		+	
00328	6.0	PH2	6	160	90	22	10



Order-No.	Content	—
24492	12 x 400 10	1



Wiha screw extractor set.

۲



405 11	Screw extractor set with spiral drill bit, 16 pcs.
Material:	Screw extractor of chrome-vanadium-molybdenum steel, HSS spiral drill bit, bronzed.
Application:	For removing damaged or broken off screws, especially outworn hex screws.
Order-No.	Series -

03988	405 11				1	
• 1	405	2.0x85	2.5x85	3.0x85	4.0x85	
		5.0x85	6.0x95	8.0x95	10.0x110	
Θ		2.3x53	2.8x51	3.4x70	4.5x80	
		5.7x93	6.8x109	9.0x117	11.0x142	


Wiha Info

۲


Screw extractor










... broken off screw heads




Pre-drill with spiral drill bit











Slide in the box spanner to the bottom and screw out without tilting

WIHA 405 SW 10,0

Screw extractor

۲





Wiha slim-Family.

The innovation for VDE fastening tools.

SoftFinish® electric

۲

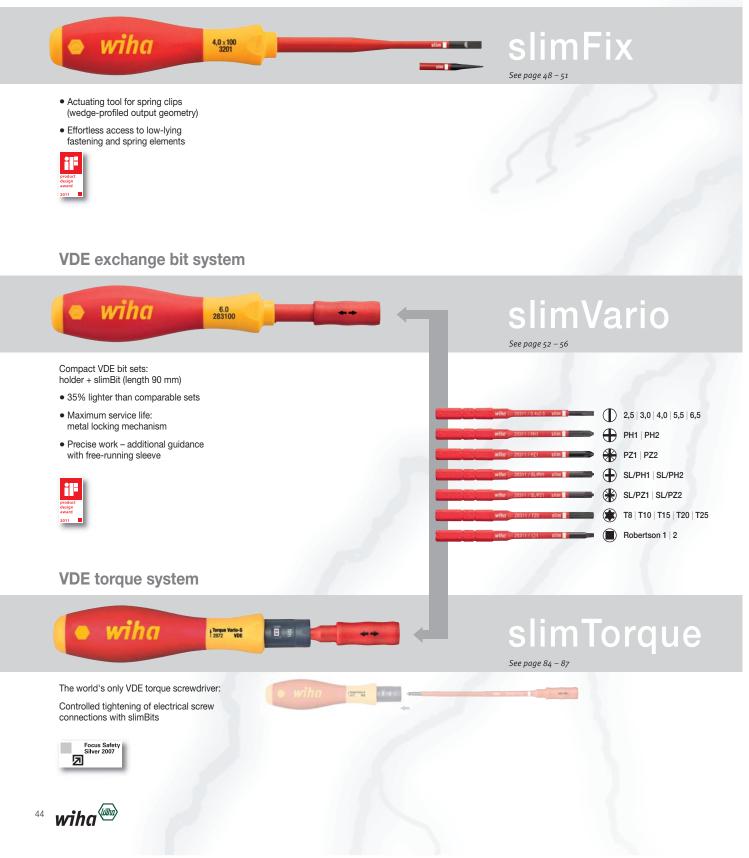

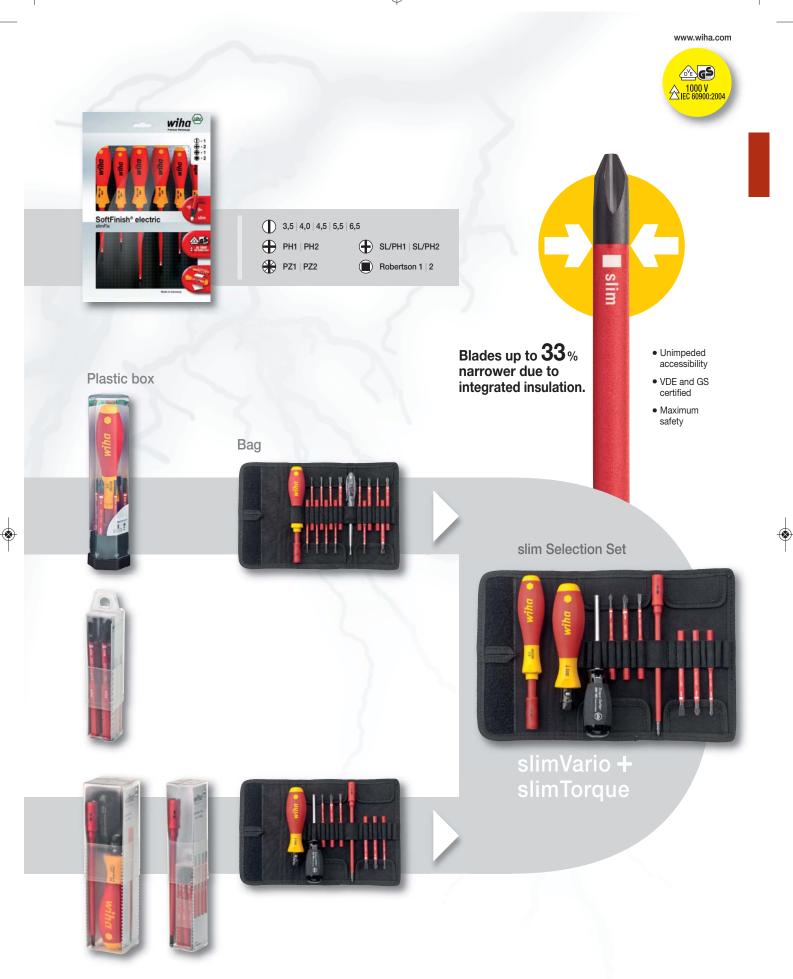

wiha with 45

Wiha slim Selection Set.



Wiha slimtechnology:

Everything in one slim Selection!



slimVario

Compact VDE bit sets: holder + slimBit (length 90 mm)

- 35% lighter than comparable sets
- Maximum service life: metal locking mechanism
- Precise work additional guidance with free-running sleeve

۲

slimTorque

The world's only VDE torque screwdriver:

See page 56, 87

Controlled tightening of electrical screw connections with slimBits





Н

Focus Safety Silver 2007 www.wiha.com

1000 V 1000 V EC 60900:200

Wiha SoftFinish® electric slimFix.

The safe and comfortable insulated VDE screwdriver.



Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

۲

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1500 V DC or 1000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric serie is individually tested in a water bath at 10000 Volts according to IEC 60900:2004.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications.



slimTECHNOLOGY: Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/spring elements.



When working with VDE tools, observe the national safety and accident prevention regulations.



Wiha SoftFinish® electric slimFix.

- Unlimited access
- Blades up to 33% narrower due to integrated insulation
- Actuating tool for spring clips (wedge-profiled output geometry)





	1000 V LEC 60900:2004
For intern	al square drive and terminal screws.
۲	wiha •
<mark>NEW</mark> 3251	▲ ▲ 1000 V SoftFinish® electric slimFix TORX® screwdriver. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2004. Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. Smaller sizes from T9 contained in the 325 series.

Order-No.	۲			— <u>÷</u>	—
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	5

lacksquare	wiha •
NEW	2000 V IEC 60900:2004
3271	SoftEinish® electric slimEix Xeno screwdriver

For terminal screws (slotted/ Phillips).Individually tested protective insulation 1,000 V AC, VDE and GS tested. Manufactured acc. to IEC 60900:2004. Standards:

Order-No.	\oplus	☴■	=		—
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10

wiha N.PELing € S 2100 V IEC 60900:2004 NEW SoftFinish® electric slimFix Xeno screwdriver. 3281 Individually tested protective insulation 1,000 V AC, VDE and GS tested. Standards: Manufactured acc. to IEC 60900:2004.

۲

Order-No.	۲				—
36329	SL/PZ1	80	191	30	10
36330	SL/PZ2	100	218	36	10

		 wiha 🗢
NEW	1000 V AIEC 60900:2004	

3581	SoftFinish® electric slimFix square (Robertson) screwdrivers.
	Individually tested protective insulation 1,000 V AC,
	VDE and GS tested.
Standards:	Manufactured acc. to IEC 60900:2004.

Order-No.	۲		—	—		-
35504	Robertson 1	2,3	100	211	30	10
35505	Robertson 2	2,8	125	243	36	10

For slotted, Phillips and Pozidriv screws.

\oplus	😽 👘 wiha 💿
	slim
	1000 V C C 60900:2004
3201	SoftFinish [®] electric slimFix slotted screwdriver.
	Individually tested protective insulation 1,000 V AC,
	VDE and GS tested.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	black-finish. Protective insulation moulded directly onto the blade and
	completely integrated into the blade in the lower area.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application:	For all work on or around electrical components up to 1000 V AC.
Extra:	The integrated protective insulation enables low-lying fastening and spring
	elements to be reached and manipulated.
Order-No.	

01001110.	Ψ.	↔		← →	+	
35446	3.5	100	0,6	204	23	10
35390	4.0	100	0,8	211	30	10
35501	4.5	125	1,0	236	30	10
35391	5.5	125	1,0	243	36	10
35392	6.5	150	1,2	268	36	10

۲


				NO.	w	iha	
$\mathbf{\Psi}$						-	
	<u>Me</u> Ge	AIEC 60900	V :2004				
3211	SoftFini	ish [®] elect	tric slim	Fix Phillips	screwdrive	r.	
		•	•	ctive insula	ation 1,000 \	/ AC,	
		d GS tes	ted.				
Standards:	DIN ISO		- +- 150	00000.000			
Extra:				60900:200		ina facto	ning and sprir
LAUA.		· ·		nd manipula		ing laster	iing and spin
	olomon	0 10 00 10		ia manpai			
Order-No.	\oplus					4	-
35393	PH1	80	191	30			10
35394	PH2	100	218	36			10
	0				-		
		-		12.	w W	iha 🤉	
¥				-			
	<u>Me</u> GS	AIEC 60900	V :2004				
32/1	SoftEin	ich® alaa	tria clim	Eix Dozidri	. corowdrive	.	

3241	SoftFinish [®] electric slimFix Pozidriv screwdriver. Individually tested protective insulation 1,000 V AC, VDE and GS tested.							
Standards:	DIN ISO	8764.						
	Manufactured acc. to IEC 60900:2004.							
Extra:	The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.							
Order-No.	+	_ _			-			
35395	PZ1	80	191	30	10			
35396	PZ2	100	218	36	10			

wiha (14) 49

Wiha SoftFinish® electric slimFix.

The safe and comfortable insulated VDE screwdriver.

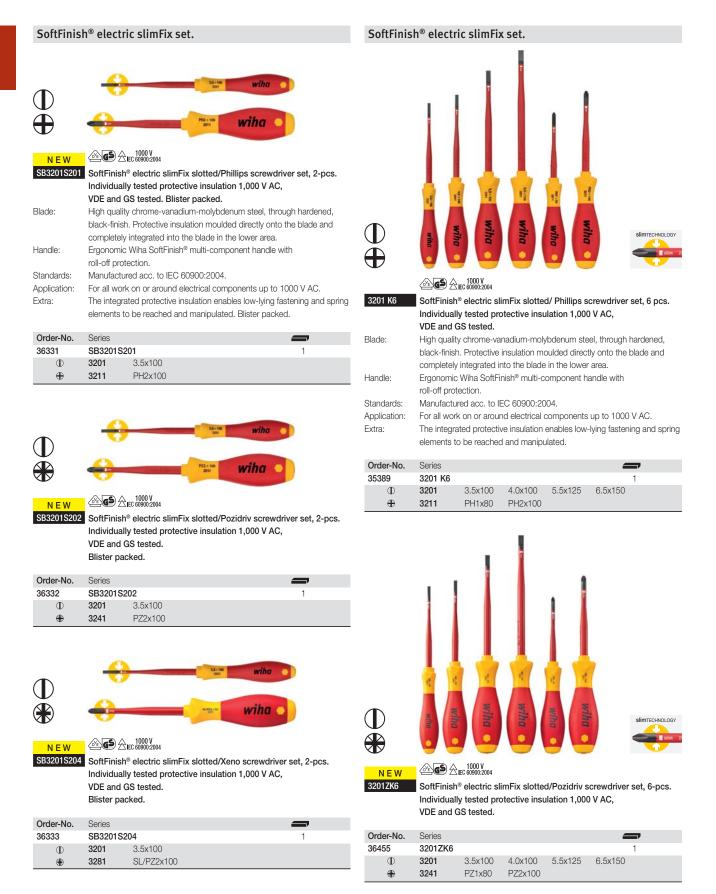

50 wiha

www.wiha.com



SoftFinis	h® electric slimFix set.	Displays.						
N E W 3251NK6 Blade: Handle: Standards:	Image: A constraint of the production of the production. Manual Current of the production of the production of the production of the production of the production. Manual Current of the production of the production. Manual Current of the production of the production. Manual Current of the production. Manual Current of acc. to IEC 60900:2004. For all work on or around electrical components up to 1000 VAC.	€ S211 VB Order-No.	Display Sof		tric slimFix.			ITECHNOLOGY
Application:			Canal diamle					
Extra:	The integrated protective insulation enables low-lying fastening and spring	35559		ay with 18 pcs		0.55	0.0	
	elements to be reached and manipulated.	⊕ ⊕	3201 3211	3x3.5 3xPH1	3x4.0 3xPH2	3x5.5	3x6.5	
Order-No.	Series							
36558	3251NK6 1							
۲	325 T8x60 T9x60							
۲	3251 T10x100 T15x100 T20x100 T25x125							
T								NTECHNOLOGY

۲





 3241 VB
 Display SoftFinish® electric slimFix. Card display with 18 pcs.

Order-No.					
35560	Card display	with 18 pcs.			
Ð	3201	3x3.5	3x4.0	3x5.5	3x6.5
*	3241	3xPZ1	3xPZ2		

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.




The perfect combination of functional bits, handy holders and maximum safety standards! The new Wiha VDE exchange bits and the SoftFinish® hand-held screwdrivers were especially developed for mobile applications at various locations, e.g. building sites, solar systems or external switch cabinets. Perfect for the job with its light weight and compact geometry.

It slim design and especially the protective insulation integrated into the bit means highly diverse applications. It can be used both as a mechanical and electrical fastening tool. The bit holder manufactured from metal parts gives the tool



a long service life and an unusual level of ruggedness for everyday use. Added to that is an assortment of commonly used exchange bits and the pleasant SoftFinish® handle.

For all those unwilling to compromise in terms of safety and comfort.



slimTECHNOLOGY: Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/spring elements.



For work in the area of live parts up to 1,000 V AC! 6 mm VDE exchange bits should be used only with the hand-held screwdriver supplied!

When working with VDE tools, observe the national safety and accident prevention regulations. Wiha SoftFinish® electric slimVario.

- Slim light mobile Ideal for taking along
- Durable Wear-free bit holder due to manufacturing with metal parts
- Gets everywhere Even in small apertures and low-lying fastening and spring elements
- A firm hold Optimal interplay of bit and holder
- Certified quality GS mark for inspected safety, one-off testing in a water bath at 10,000 V according to IEC 60900:2004



۲

											A 1000 V B 1000 V	:2004
oftFinis	h® electric s	slimVari	0.			slimBits						
C		-	6.0 283100	wih	a 🔹	$igodoldsymbol{igodoldsymbol{\Theta}}$		/	311 / SL/PH1 wiho			
831-00 ade:	SoftFinish® el 6.0 mm. Chrome-vanac	ectric slim		older with handle	le and ClicFix,	N E W 2831-13		h® elect idually t	ric slimBit, Xeno, ested protective			Phil-
andle: t holder: oplication:	Insulation mou Wiha SoftFinisl ClicFix quick re Only for 6 mm Compact screw	h® electric r elease holde slimBits.	nulti-comp er securely	onent handle with locks bits.	h roll-off protection.	Order-No. 34587 34588	⊕ SL/PH1 SL/PH2	90 90	©t 6,0 6,0		1 1	
	Mark from the state	h bit styles	C 6.3 and	E 6.3.								
Order-No.	O	0 50	160	طر 13	5			slim 28	311 / SL/PZ1 wiha			
Order-No.		28311 / 0.8x4	160	•		2831-14		1000 \ LEC 60900: h® elect Ily teste	2004 ric slimBit for terr d protective insu	•		
Order-No. 4577	o 6 3	28311/0.8x4 000 V 1990:2004 ectric slim ested prote ested.	160 wihα Bit, slotte ctive insu	13 d. lation 1,000 V AC	5		SoftFinish Individual	1000 \ LEC 60900: h® elect Ily teste	2004 ric slimBit for terr d protective insu	•).
Drder-No. 14577	6 30 6 30 € Control of the second	28311 70 844 200 y ectric slim ested prote ested. acc. to IEC irome vana lation moul	160 wiha Bit, slotte ctive insu 60900:20 dium steel ded direct	13 d. lation 1,000 V AC	5 C, d completely	2831-14 Order-No. 34589	SoftFinish Individual VDE and SL/PZ1 SL/PZ2	1000 \ LEC 60900: n® elect Ily teste GS test 90 90	(not d protective insu ed. (0,0) (0,0) (0,0)	•	с, —	
Drder-No. 4577 D 831-10 andards: aterial:	6 30 6 30 Control of the second sec	2001 / 0.844 2000 V 2000 V 2000 2004 ectric slim ested prote ested. acc. to IEC arome vana lation moull the blade i o raound protective a reached a	160 witha Bit, slotte ctive insu 60900:20 dium steel ded direct n the lowe electrical of insulation and manipu	d. lation 1,000 V AC 04. through-hardene y onto the bit and area from size 4. components up to enables low-lying 1 lated. The slim for	5 c, ed, bronzed. d completely .0. b 1000 V AC. fastening and spring rm of the bit allows	2831-14 Order-No. 34589 34590	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	Lice 1000 V Lice 60900: n° elect Ily teste GS test 90 90 90	with a state of the state o	lation 1,000 V AC	с, —	
Drder-No. 14577 131-10 1331-10 145777 1457777 145777 145777 145777 14	6 30 6 30 6 30 6 50 7 Finish® el Individually te VDE and GS t Manufactured High-quality ch Protective insu integrated into For all work on The integrated elements to be easy reaching	2831 70.844 2000 V 9900-2004 ectric slim sted prote ested. acc. to IEC nrome vana lation moul the blade i or around protective e reached a of the screv only to be	160 witha Bit, slotte ctive insu 60900:20 dium steel ded direct h the lowe electrical of insulation of manipu vs below t used in the	d. lation 1,000 V AC 04. through-hardene y onto the bit and area from size 4. components up to enables low-lying f lated. The slim for he finger and hand	5 c, ed, bronzed. d completely .0. b 1000 V AC. fastening and spring rm of the bit allows	2831-14 Order-No. 34589 34590	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	Liec 60000: Siec 60000: n° elect Ily teste GS test 90 <t< td=""><td>1004 ric slimBit for terr d protective insu ed. (0) 6,0 6,0 (0) (0) (0) (0) (0) (0) (0) (0</td><td>lation 1,000 V AC</td><td>2, 1 1</td><td></td></t<>	1004 ric slimBit for terr d protective insu ed. (0) 6,0 6,0 (0) (0) (0) (0) (0) (0) (0) (0	lation 1,000 V AC	2, 1 1	
Drder-No. 4577 B 831-10 andards: aterial: oplication: tra: tention: Drder-No.	6 3 6 3 6 3 6 3 6 6 6 6 6 7 6 7 6 7 6 7 7 7 6 7 7 7 7 7 7 7 7 7 7 7 7 7	28311 70 844	Bit, slotte ctive insu 60900:20 dium steel ded direct n the lowe electrical d insulation on the lowe electrical d insulation on the system).	d. lation 1,000 V AC 04. y onto the bit and r area from size 4. somponents up to enables low-lying 1 lated. The slim for ne finger and hand s slimVario bit hold	5 c, d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque	2831-14 Order-No. 34589 34590	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	100000 10000 100	1 1 0 0 0 1 0 0 0	lation 1,000 V AC	2, 1 1 2, 2, 1	
andards: andards: aterial: oplication: tra: tention: rder-No. 4578	● ● 6 30 ● 6 ● ● <td< td=""><td>28311 70 844</td><td>Bit, slotte ctive insu 60900:20 dium steel ded directh n the lowe electrical of insulation on dimanipu vs below t used in the e system).</td><td>d. lation 1,000 V AC 04. through-hardene y onto the bit and r area from size 4. components up to enables low-lying t lated. The slim for ne finger and hand e slim/Vario bit hold</td><td>5 c, ed, bronzed. d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque</td><td>2831-14 Order-No. 34589 34590</td><td>SoftFinish Individual VDE and V SL/PZ1 SL/PZ2</td><td>Line 6000 Line 6000 go go go go go go go go go go go go go</td><td>2004 ric slimBit for terr d protective insu ed. (a) (b) (c) (c) (c) (c) 311/115 wthe 2004 wthe 2004 wthe 2004 ric slimBit, TORX' d protective insu ed. (c) (c) (c) (c) (c) (c) </td><td>lation 1,000 V AC</td><td>2, 1 1 1 2, 1 1</td><td></td></td<>	28311 70 844	Bit, slotte ctive insu 60900:20 dium steel ded directh n the lowe electrical of insulation on dimanipu vs below t used in the e system).	d. lation 1,000 V AC 04. through-hardene y onto the bit and r area from size 4. components up to enables low-lying t lated. The slim for ne finger and hand e slim/Vario bit hold	5 c, ed, bronzed. d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque	2831-14 Order-No. 34589 34590	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	Line 6000 Line 6000 go go go go go go go go go go go go go	2004 ric slimBit for terr d protective insu ed. (a) (b) (c) (c) (c) (c) 311/115 wthe 2004 wthe 2004 wthe 2004 ric slimBit, TORX' d protective insu ed. (c) (c) (c) (c) (c) (c) 	lation 1,000 V AC	2, 1 1 1 2, 1 1	
Drder-No. 14577	● 6 30 ● 6 30 ● 6 30 ● ● 6 30 ● ● ● ● ● ● ● ● ● ● ● ●	28311 70 844 000 V 9000:2004 ectric slim ested prote ested. acc. to IEC rorme vana lation moul the blade i or around protective e reached a of the screw only to be (VDE torqu CDE torqu CDE 0,4 0 0,5	Bit, slotte ctive insu 60900:20 dium steel ded directh n the lowe electrical of insulation of the lowe tused in the used in the system).	d. lation 1,000 V AC 04. y onto the bit and r area from size 4. somponents up to enables low-lying 1 lated. The slim for ne finger and hand s slimVario bit hold	5 c, ed, bronzed. d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque on 1 on 1 on 1	2831-14 Order-No. 34589 34590 34590 N E W 2831-15 Order-No. 35506 35507	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	100000 Let 60000 Let 60000 go elect go go go go go go go go go go	2004 ric slimBit for terr d protective insu ed. (a) 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 6,0 (a) (b) (c) (c) <td>lation 1,000 V AC</td> <td>2, 1 1 1 2, 1 1 1</td> <td></td>	lation 1,000 V AC	2, 1 1 1 2, 1 1 1	
ttention: Drder-No. 34577 2831-10 2831-10 tandards: laterial: pplication: xtra: ttention: Drder-No. 34578 34579 34580 34581	● ● 6 30 ● 6 ● ● <td< td=""><td>28311 70 844 000 V 9000-2004 ectric slim ssted prote ested. acc. to IEC rrome vana lation moul the blade i or around protective e reached a of the screw only to be (VDE torqu CDE torqu CDE 0,4 0 0,5 0 0,8</td><td>Bit, slotte ctive insu 60900:20 dium steel ded directh n the lowe electrical of insulation on dimanipu vs below t used in the e system).</td><td>d. lation 1,000 V AC 04. through-hardene y onto the bit and r area from size 4. components up to enables low-lying t lated. The slim for ne finger and hand e slim/Vario bit hold</td><td>5 c, ed, bronzed. d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque</td><td>2831-14 Order-No. 34589 34590</td><td>SoftFinish Individual VDE and V SL/PZ1 SL/PZ2</td><td>Line 6000 Line 6000 go go go go go go go go go go go go go</td><td>2004 ric slimBit for terr d protective insu ed. (a) (b) (c) (c) (c) (c) 311/115 wthe 2004 wthe 2004 wthe 2004 ric slimBit, TORX' d protective insu ed. (c) (c) (c) (c) (c) (c) </td><td>lation 1,000 V AC</td><td>2, 1 1 1 2, 1 1</td><td></td></td<>	28311 70 844 000 V 9000-2004 ectric slim ssted prote ested. acc. to IEC rrome vana lation moul the blade i or around protective e reached a of the screw only to be (VDE torqu CDE torqu CDE 0,4 0 0,5 0 0,8	Bit, slotte ctive insu 60900:20 dium steel ded directh n the lowe electrical of insulation on dimanipu vs below t used in the e system).	d. lation 1,000 V AC 04. through-hardene y onto the bit and r area from size 4. components up to enables low-lying t lated. The slim for ne finger and hand e slim/Vario bit hold	5 c, ed, bronzed. d completely .0. o 1000 V AC. fastening and spring rm of the bit allows d guards. der and slimTorque	2831-14 Order-No. 34589 34590	SoftFinish Individual VDE and V SL/PZ1 SL/PZ2	Line 6000 Line 6000 go go go go go go go go go go go go go	2004 ric slimBit for terr d protective insu ed. (a) (b) (c) (c) (c) (c) 311/115 wthe 2004 wthe 2004 wthe 2004 ric slimBit, TORX' d protective insu ed. (c) (c) (c) (c) (c) (c) 	lation 1,000 V AC	2, 1 1 1 2, 1 1	

۲

(Ð	-	lim 2831	1 / PH1	wiha			
1	34582	6.5	90	1,2	6,0		1	
	34581	5.5	90	1,0	6,0		1	
	34580	4.0	90	0,8	6,0		1	
	34579	3.0	90	0,5	6,0	no slim version	1	

	<u>A</u>	1000 V C 60900:20	04		
2831-11	SoftFinish®	electri	c slimBit, Phillips.		
	Individually	tested	protective insulation 1,000 V AC,		
	VDE and G	S teste	d.		
Order-No.	÷ :		•1		
34583	PH1	90	6,0	1	
34584	PH2	90	6,0	1	

		/	311 / PZ1	wiha		
	∕≊GS ∕	2 IEC 60900:2	2004			
2831-12	SoftFinis	h® elect	ric slimE	Bit, Pozidriv.		
	Individua	ally teste	d protec	ctive insulation 1,000 V AC,		
	VDE and	GS test	ed.			
Order-No.	*	===	(۲			
34585	PZ1	90	6,0		1	
34586	PZ2	90	6,0		1	



2831-17

1000 V REC 60900:2004


SoftFinish® electric slimBit, square (Robertson). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	۲		=	۱۵	—
35510	Robertson 1	2,3	90	6,0	1
35511	Robertson 2	2,8	90	6,0	1



Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.

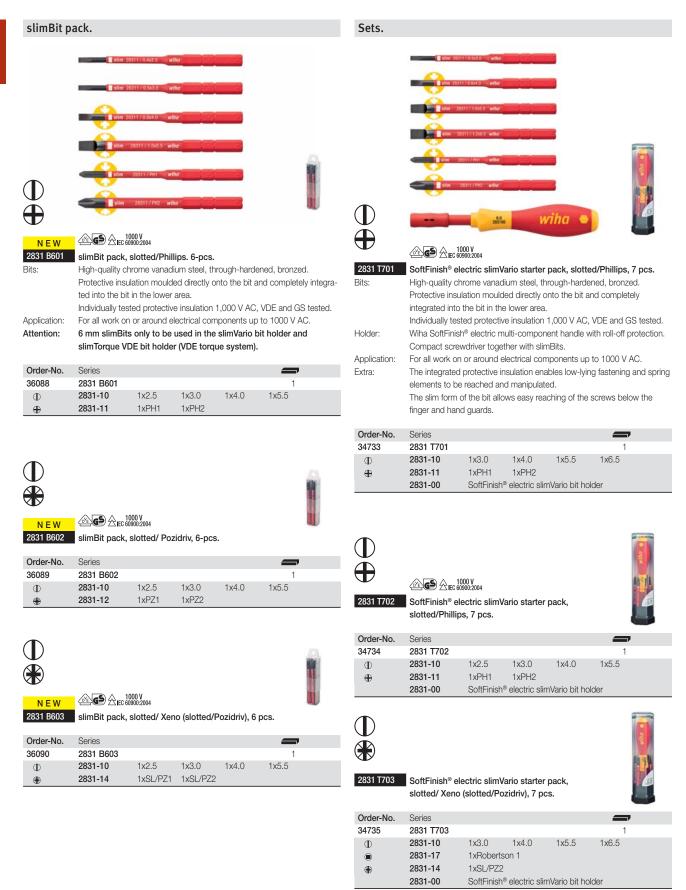



www.wiha.com



slimVario display.

slimmide	wiho	1	
	1	3	1
wiha		et la	wiha
1	1		L.
1		12	



 $\bigoplus_{i=1}^{n}$

N E W 2831 T701 VB Display SoftFinish® electric slimVario. Card display with 7 pcs.

Order-No.

35556	Kartondisplay mit 7 Stück.						
Ф	2831-10	1x3.0	1x4.0	1x5.5	1x6.5		
Ð	2831-11	1xPH1	1xPH2				
	2831-00	SoftFinish®	electric slim	Vario bit hold	er		



۲

NEW 2831 T702 VB Display SoftFinish® electric slimVario. Card display with 7 pcs.

Order-No.

01001110.						
35557	Kartondisplay	mit 7 Stück				
Ð	2831-10	1x2.5	1x3.0	1x4.0	1x5.5	
Ð	2831-11	1xPH1	1xPH2			
	2831-00	SoftFinish®	electric slim	Nario bit ho	lder	



€ S 2100 V IEC 60900:2004 2831 T703 VB Display SoftFinish® electric slimVario.

Card display with 7 pcs.

Order-No.

NEW

35558	Kartondisplay	Kartondisplay mit 7 Stück.					
Ð	2831-10	1x3.0	1x4.0	1x5.5	1x6.5		
	2831-17	1xRobertson 1					
۲	2831-14	1xSL/PZ2					
	2831-00	SoftFinish® electric slimVario bit holder					

Blades up to **33**% narrower due to integrated insulation.

• Unimpeded accessibility



• Maximum safety

wiha 55

Wiha SoftFinish[®] electric slimVario.

Maximum safety at minimum size.

SoftFinish[®] electric slimVario sets.



2831T704	slimVario starter set, 7-pcs.
	Important slimBits in a bag.Slotted/ Phillips.
Handle:	Wiha SoftFinish® electric multi-component handle with roll-off protection.
Bit holder:	ClicFix quick release holder securely locks bits.
	Only for 6 mm slimBits.
Bits:	High-quality chrome vanadium steel, through-hardened, bronzed.
	Protective insulation moulded directly onto the bit and completely
	integrated into the bit in the lower area.
	Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Application:	For all work on or around electrical components up to 1000 V AC.
Extra:	Effortless access to low-lying fastening elements. Arranged clearly in a
	high quality, rugged and durable bag.
Order-No.	Series

Order-No.	Series				
36069	2831T704				1
	2831-00	SoftFinish	® electric slir	nVario bit ho	older
Ф	2831-10	1x2.5	1x3.0	1x4.0	1x5.5
Ð	2831-11	1xPH1	1xPH2		



€ 60900:2004 2831T705 slimVario starter set, 7-pcs. Important slimBits in a bag. Slotted/Pozidriv.

Order-No.	Series				
36070	2831T705				1
	2831-00	SoftFinish	n® electric sli	mVario bit ho	older
Ð	2831-10	1x2.5	1x3.0	1x4.0	1x5.5
*	2831-12	1xPZ1	1xPZ2		

NEW 2831TL

NEW

۲

slimVario bag, empty.

Order-No.	Series	—
36326	2831TL	1

SoftFinish[®] electric slimVario sets.

 (\diamond)

Extra:



NEW	
2831T16	slimVario starter set, 16-pcs.
	All commonly used slimBits in a bag.

Slotted/Phillips/Pozidriv/Pozidriv Xeno/TORX® SoftFinish® voltage tester, 110-250 volts.

Order-No.	Series				
36068	2831T16				1
	2831-00	SoftFinish®	electric slim\	/ario bit hold	er
\oplus	255-11	Single-pole	voltage teste	er, 110-250 v	olts.
Ф	2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	2831-12	1xPZ1	1xPZ2		
Ð	2831-11	1xPH1	1xPH2		
۲	2831-14	1xSL/PZ1	1xSL/PZ2		
۲	2831-15	1xT10	1xT15	1xT20	1xT25



NEW	€ 1000 V € IEC 60900:2004
2872 T10	slim selection set, 10-pcs.
	VDE complete set with torque screwdriver, bit holder and
	slimBits.Slotted/Phillips/Pozidriv.
Handle:	VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable.
	Bit holder with SoftFinish® electric multi-component handle.
Bit holder:	ClicFix quick release holder securely locks bits.
	Only for 6 mm slimBits.
Bits:	Protective insulation moulded directly onto the bit and completely
	integrated into the bit in the lower area.
	Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Application:	For controlled fastening on live parts up to 1 000 V AC.
Extra:	100% safety from fastening with torque according to specification of
	manufacturer type-tested switching devices according to EN 60439-1.
	Effortless access to low-lying fastening elements. Arranged clearly in a
	high quality, rugged and durable bag.

Order-No.	Series		—			
36078	2872 T10		1			
	2872	TorqueVa 1.0-5.0 N	rio [®] -S VDE Drehmoment-Schraubendreh Im	er.		
	2831-00	SoftFinish [®] electric slimVario bit holder slimTorque VDE bit holder for 6 mm slimBits.				
	2879					
	285-900	Torque-S	etter			
\oplus	2831-10	1x4.0	1x5.5			
Ð	2831-11	1xPH1	1xPH2			
*	2831-12	1xPZ1	1xPZ2			



Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.



www.wiha.com





The right tool at a glance, thanks to the printed screw symbol on the handle end.



For slotted screws.

3

					-	wiha 💿
Ť						
	<u>de</u>	AIEC 60900:	/ 2004			
320N	SoftFin	ish [®] elect	ric slot	ted scre	wdriver.	
	 Individu	ually teste	ed prote	ective in	sulation	1,000 V AC,
	VDE an	d GS test	ed.			
Blade:	High qu	ality chror	ne-vana	adium-m	olybdenui	m steel, through hardened,
		nish. Insula				
Handle:	-		SoftFinis	sh® multi	-compon	ent handle with
		protection.				
Standards:						0900:2004.
Application:	For all v	vork on or	around	electrica	al compor	nents up to 1000 V AC.
Order-No.	Ð		\ominus ;			—
00819	2.0	60	0,4	164	23	10
00820	2.5	75	0,4	179	23	10
00821	3.0	100	0,5	204	23	10
00822	3.5	100	0,6	204	23	10
00823	4.0	100	0,8	211	30	10
00824	4.5●	125	1,0	236	30	10
00825	4.5●	175	1,0	286	30	5
31863	4.5●	200	1,0	311	30	10
00826	5.5	125	1,0	243	36	10
00827	5.5•	175	1,0	293	36	5
00828	6.0•	150	1,2	268	36	10
00829	6.5	150	1,2	268	36	10
00830	8.0	175	1,2	299	41	10
00831	8.0	175	1,6	299	41	10
00832	10.0	200	1,6	324	41	10

 00832
 10.0
 200
 1,6

 • Additional dimension. Non-DIN size.

Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

۲

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1,500 V DC/ 1,000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10,000 Volts according to IEC 60900:2004.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications.

Wiha SoftFinish® electric.

- Safety when working with live equipment up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 volts according to IEC 60900:2004
- Awarded the GS symbol for tested safety
- Multi-component SoftFinish[®] handle provides maximum user comfort

When working with VDE tools, observe the national safety and accident prevention regulations.

wiha 🖤 57

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.

For Phillips, Pozidriv and TORX[®] screws.

\oplus	Wiene Wi	ha 🔹					
321N	SoftFinish® electric Phillips screwdriver.						
	Individually tested protective insulation 1,000 V AC,	Individually tested protective insulation 1,000 V AC,					
	VDE and GS tested.						
Blade:	High quality chrome-vanadium-molybdenum steel, through ha	ardened,					
	black-finish. Insulation moulded directly onto blade.	black-finish. Insulation moulded directly onto blade.					
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with						
	roll-off protection.	roll-off protection.					
Standards:	DIN ISO 8764. Manufactured acc. to IEC 60900:2004.	DIN ISO 8764. Manufactured acc. to IEC 60900:2004.					
Application:	For all work on or around electrical components up to 1000 V	AC.					
Order-No.		ק					
00846	PH0 60 164 23 1	0					

00846	PH0	60	164	23	10
00847	PH1	80	191	30	10
00848	PH2	100	218	36	10
00849	PH3	150	268	41	10
00850	PH4	200	318	41	5

					PZ 2 × 100	wiha 💿		
	<u>ar</u> s		00V 0:2004					
324				driv screw	driver. ation 1,000 V AC			
		d GS tes	•	cuve msua	4110H 1,000 V AC	' ,		
Blade:	0 1	,			idenum steel, thr	ough hardened,		
Handle:	Ergonor	black-finish. Insulation moulded directly onto blade. Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.						
Standards:	DIN ISO	8764. M	anufactu	red acc. to	IEC 60900:2004			
Application:	For all w	ork on or	around	electrical co	omponents up to	1000 V AC.		
Order-No.	*	=		— ‡				
00877	PZ0	60	164	23		10		
00070	074	00	101	00		10		

00877	PZ0	60	164	23	10
00878	PZ1	80	191	30	10
00879	PZ2	100	218	36	10
08800	PZ3	150	324	41	5

	wiha 🥥
	AC 1000V IEC 609002004
325	SoftFinish® electric TORX® screwdriver. Individually tested protective insulation 1,000 V AC,
Blade:	VDE and GS tested. High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	Manufactured acc. to IEC 60900:2004.
Application:	For all work on or around electrical components up to 1000 V AC.
Extra:	Sizes T10 to T40 are in the 3251 seriess with the slimFix screwdrivers.
Order-No.	

Order-No.	۲	→			
03760	T5	60	164	23	10
03761	T6	60	164	23	10
03762	T7	60	164	23	10
00881	T8	60	164	23	10
00882	T9	60	164	23	10



۲

For allen screws and internal square-drive screws.

							States of Lot of Lot of Lot	
\bigcirc						SW 8.0 x 125	wiha	
U								
	<u>Me</u> g9	AIEC 60900:	V 2004					
322	SoftFini	sh [®] elect	tric hex	nut driv	/er.			
	Individu	ally teste	ed prote	ctive ir	sulation	n 1,000 V AC		
	VDE and	d GS test	ted.					
Blade:				~		ed, black-finisl		
						eep drawn so		
Handle:				h® mult	i-compo	nent handle v	vith	
Oton doudou		rotection.				00.0004		
Standards:		5. Manufa				00:2004.		
Application: Order-No.	O	rnal hex s	crews a		nuis.			
00853	4	125	236	30	کیپ 10,2		10	
00855	5	125	236	30	11,2		10	
00856	5.5	125	236	30	11,2		10	
00857	6	125	236	30	12,2		10	
00858	7	125	243	36	14,5		10	
00859	8	125	243	36	15,2		10	
00860	9	125	243	36	16,0		10	
00861	10	125	243	36	17,2		10	
00862	11	125	243	41	19,2		5	
00863	12	125	243	41	20,2		5	
00864	13	125	243	41	22,2		5	
00865	14	125	243	41	23,2		5	
00866	15	125	243	41	25,2		5	
00867	16	125	243	41	25,2		5	
00868	17	125	243	41	27,2		5	
					,			
		-				SW6,0×100	wiha	
		AC 10	00V				and the second second	
			D:2004					
323N	SoftFini	sh [®] elect	ric hex	screwo	lriver.			
	Individu	ally teste	ed prote	ctive ir	sulation	n 1,000 V AC		
	VDE and	d GS test	ted.					
Blade:	Chrome	-vanadiur	n steel, t	hrough	hardene	ed, black-finisl	า.	
	Insulatio	n moulde	d directly	y onto k	olade.			
Handle:	Ergonon	nic Wiha	SoftFinis	h® mult	i-compo	nent handle v	vith	
	roll-off p	rotection.						
Standards:	Manufac	ctured acc	c. to IEC	60900	2004.			
Application:	For allen	For allen screws.						

Application:	For all	en screws.			
Order-No.	۲	=	==		—
30361	2.5	75	179	23	10
30362	3.0	75	179	23	10
30363	4.0	75	186	30	10
30364	5.0	75	186	30	10
30365	6.0	100	218	36	10
30366	8.0	100	218	36	10

-	z.110 wiha 💿
U	AC 1000V LEC 60900;2004
358N	SoftFinish® electric square (Robertson) screwdriver.
	Individually tested protective insulation 1,000 V AC,
	VDE and GS tested.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	black-finish. Insulation moulded directly onto blade.
Standards:	Manufactured acc. to IEC 60900:2004.
Application:	For fastening and unfastening internal square-drive (Robertson) screws.
Order-No.	

Order-No.			⇒■			_
32396	Robertson 1	2,3	100	211	30	10
32397	Robertson 2	2,8	150	268	36	10

 \bigcirc

Blade:

Handle:

00833

Ť

۲


324

PZ1x80

۲

www.wiha.com

AGS

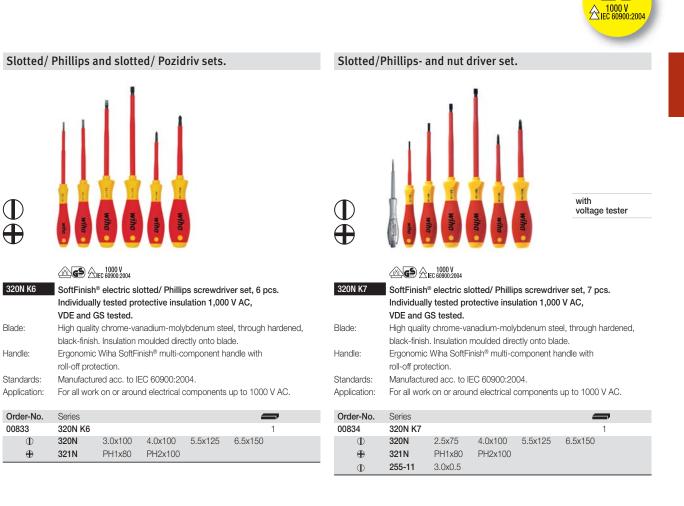

۲



€ S 2100 V 1000 V 1000 V 1000 V

320N ZK6 S0	SoftFinish® electric slotted/ Pozidriv screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC,						
	VDE and G	S tested.					
Blade:	High quality	/ chrome-va	nadium-moly	bdenum ste	el, through hardened,		
	black-finish	. Insulation r	moulded dire	ctly onto bla	de.		
Handle:	Ergonomic	Wiha SoftFi	nish® multi-co	omponent ha	andle with		
	roll-off prot	ection.					
Standards:	Manufactured acc. to IEC 60900:2004.						
Application:	For all work on or around electrical components up to 1000 V AC.						
Order-No.	Series						
25477	320N ZK6	SO			1		
Ф	320N	2.5x75	3.5x100	4.5x125	5.5x125		

PZ2x100

.

	1111
	11111
0	wiha • wiha • wiha • wiha •
	200 € 2000 V 2000 V 2004
322 K5	SoftFinish [®] electric hex nut driver set, 5 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Blade:	Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade. Deep drawn socket.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	Manufactured acc. to IEC 60900:2004.
Application:	For all work on or around electrical components up to 1000 V AC.
Order-No.	Series
00400	000 1/5

Order-No.	Series				
29466	322 K5				1
0	322	5.5x125	7x125	8x125	
		10x125	13x125		





For terminal screws.



Wiha's new insulated VDE screwdriver for terminal screws.

The SoftFinish® electric Xeno screwdriver is a special VDE screwdriver used to turn terminal screws.

۲

Terminal screws are typically used in switch-cabinet systems and fuse boxes, terminal blocks and relays. They have a special combination profile and are available as slotted/Phillips or slotted/Pozidriv models.



S



The Wiha SoftFinish® electric Xeno is ideally suited for work on switch cabinet systems, fuse boxes, terminal strips and relays.



۲

Wiha Xeno.

- The special slotted/Phillips or slotted/Pozidriv profile of the Xeno is optimally suited for terminal screws
- The combination profile reduces slipping and ensures greater torque transfer

When working with VDE tools, observe the national safety and accident prevention regulations.



www.wiha.com

	1000 V 21EC 60900-2004
For terminal screws (slotted/ Pozidriv).	

wiha

For terminal screws (slotted/ Phillips).

lacksquare	wiha •					
	€ 60900.2004					
327	SoftFinish [®] electric Xeno.					
	For terminal screws (slotted/ Phillips).Individually tested protective					
	insulation 1,000 V AC, VDE and GS tested.					
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,					
	black-finish.					
	Insulation moulded directly onto blade.					
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with					
	roll-off protection.					
Standards:	Manufactured acc. to IEC 60900:2004.					
Application:	For all work on or around electrical components up to 1000 V AC.					
	No slipping and better torque transfer with terminal screws e.g. in					
	switch-cabinets, fuse boxes and terminal blocks.					
	-					
Order-No.						
30716	SL/PH1 80 191 30 10					

()wiha 🤇 € 1000 V IEC 60900:2004 328 SoftFinish® electric Xeno. For terminal screws (slotted/ Pozidriv). Individually tested protective insulation 1,000 V AC, VDE and GS tested. Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade. Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Standards: Manufactured acc. to IEC 60900:2004. Application: For all work on or around electrical components up to 1000 V AC. No slipping and better torque transfer with terminal screws e.g. in switch-cabinets, fuse boxes and terminal blocks.

Order-No.	۲	—			-
30700	SL/PZ1	80	191	30	10
30701	SL/PZ2	100	218	36	10



36

100 218

10

۲

€ S 21EC 60900:2004

327

 \oplus

SL/PH2

30715

۲

SB327 S2	SoftFinish [®] electric Xeno screwdriver set, 2 pcs. For terminal screws (slotted/ Phillips). Individually tested protective insulation 1,000 V AC, VDE and GS tested. Blister packed.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	black-finish. Insulation moulded directly onto blade.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection.
Standards:	Manufactured acc. to IEC 60900:2004.
Application:	For all work on or around electrical components up to 1000 V AC.
Order-No.	Series -
32281	SB327 S2 1

SL/PH1x80 SL/PH2x100

	wiha •
	1000 V AIEC 009002004
SB328 S2	SoftFinish [®] electric Xeno screwdriver set, 2 pcs. Individually tested protective insulation 1,000 V AC,
	VDE and GS tested. Blister packed.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
	Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
Application:	For all work on or around electrical components up to 1000 V AC.
Extra:	The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. Blister packed.
Order No	Corios

Order-No.	Series			
32282	SB328 S2			1
۲	328	SL/PZ1x80	SL/PZ2x100	

Wiha Classic electric.

The space-saving insulated VDE screwdriver.

For slotted and Phillips screws.

320 Blade:	Individu VDE an Chrome	d GS test	slotted ed prote ted. n steel,	ective in: through l	sulation 1,000		$\bigoplus_{n \in \mathbb{N}}$		Land Land Land Land Land Land Land Land			
landle:						chemicals and oils.			0	Ð (Ð		
Standards:	DIN ISC) 2380. Ma	anufactu	ured acc.	to IEC 60900:2	004.	_					
Application:	For all w	vork on or	around	lelectrica	l components u	p to 1000 V AC.			2 1000 V			
Order-No.	Ð		O ;		<u>+</u>	-	320 K6			ad/Dhilling	a waxaa dub ay ma	
00782	1.6	↔ 40	0.4	115	19	10	320 KO			ed/Phillips s rotective ins		
00783	2.3	60	0,4	135	19	10			GS tested pr	olective IIIS	ulation 1,000	0 v AO,
00784	2.5	75	0,0	150	19	10	Blade:			el, through h	ardened bla	ck-finish
00785	2.8	75	0,6	150	19	10	Diade.			ectly onto bla		or million.
00786	3.0•	100	0,5	175	19	10	Handle:					to chemicals and o
06568	3.0	150	0,5	225	19	10	Standards:			IEC 60900:20		
00787	3.5	100	0,6	185	22	10	Application:					up to 1000 V AC
00788	3.5	100	0,8	185	22	10						
00789	4.0	100	0,8	195	24	10	Order-No.	Series				—
06569	4.0	150	0,8	245	24	10	00815	320 K6				1
00790	4.5	125	1,0	220	24	10	Φ	320	2.8x75	4.0x100	5.5x125	6.5x150
00791	4.5●	175	1,0	270	24	10	Ð	321	PH1x80	PH2x100		
06570	5.0	100	1,0	195	24	10						
06571	5.0	150	1,0	245	24	10						
00792	5.5	125	1,0	230	28	10	_					
00793	5.5•	175	1,0	280	28	10						
06573	6.0	100	1,2	205	28	10						
00794	6.0	150	1,2	255	28	10						
00795	6.5	150	1,2	255	28	10						
00796	8.0	175	1,2	290	32	10						
00797	10.0	200	1,6	325	36	10		1				
	dimonoion	. Non-DIN	l sizo									

۲

VDE slotted/ Phillips sets.

AC 1000V IEC 60900;2004

321	Classic electric Phillips screwdriver. Individually tested protective insulation 1,000 V. VDE and GS tested.	AC,
Blade:	Chrome-vanadium steel, through hardened, black-fill Insulation moulded directly onto blade.	inish.
Handle: Standards: Application:	Impact resistant Wiha Classic handle, resistant to cl DIN ISO 8764. Manufactured acc. to IEC 60900:20 For all work on or around electrical components up	04.
Order-No.		

00836	PH0	60	135	19	10
00837	PH1	80	175	24	10
00838	PH2	100	205	28	10
00839	PH3	150	265	32	10
00840	PH4	200	325	36	10

1000 V

320 P7 S0	Classic electric slotted/Phillips screwdriver set, 7-pcs.	
	Individually tested protective insulation 1,000 V AC,	
	VDE and GS tested.	
Blade:	Chrome-vanadium steel, through hardened, black-finish.	
	Insulation moulded directly onto blade.	
Handle:	Impact resistant Wiha Classic handle, resistant to chemicals and oi	ls.
Standards:	Manufactured acc. to IEC 60900:2004.	
Application:	For all work on or around electrical components up to 1000 V AC.	
Order-No.	Series	
07151	320 P7 SO 1	

Order-No.	Series				-	
07151	320 P7 SO					1
Ð	320	2.8x75	4.0x100	5.5x125	6.5x150	
Ð	321	PH1x80	PH2x100			
Ð	255-3	3.0x60				

⁶² wiha

Wiha single-pole voltage tester.

www.wiha.com

1000 V C 1000 V EC 60900:2004

Single-pole voltage tester.

High-quality chrome-vanadium molybdenum steel, through-hardened, nickel-coated.						
Ergonomic Wiha SoftFinish® handle of transparent, impact resistant						
plastic. Metal contact plate and robust clip.						
Blade tip DIN ISO 2380-1.						
For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential. Suitable for trade and industry professionals.						
Tried-and-proven Wiha SoftFinish® screwdriver with additional testing						

Single-pole voltage tester.

\oplus	<u>کو</u> ((
255-2	Single-pole voltage tester, 220-250 volts.						
Blade:	Chrome vanadium steel, through-hardened, nickel-coated.						
Handle:	Transparent.						
Application:	For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential. Suitable for trade and industry professionals.						
Order-No.							
05270	3.5 107 195 18 10						

NEW					
SB 255-2	Single-	-pole volt	age tes	ter 220-25	50 volts in blister pack.
	-		-		
Order-No.	Ф				—
36517	3.5	107	195	18	5

N E W SB 255-11 Single-pole SoftFinish® voltage tester 110-250 Volt in blister pack.

Order-No.	Ф	 ■	==		—
35378	3.0	60	140	19	5

Ψ	△ ● (€
255-3	Single-pole voltage tester, 220-250 volts.
Blade:	Chrome vanadium steel, through-hardened, nickel-coated.
Handle:	Transparent with clip.
Application:	For determining alternating voltages in low voltage range up to 250 volts
	with respect to earth potential.
	Suitable for trade and industry professionals.

Order-No.	\oplus				—
05271	3.0	60	140	15	10

Single-pole voltage tester 220-250 volts in blister pack.

15

140

65

Wiha Info

۲

Wiha SoftFinish® as single-pole voltage tester.

- High quality, hardened chromevanadium molybdenum blade for perfect fastening
- Quality screwdriver in Wiha SoftFinish® design with testing function
- Voltage testing function with respect to earth potential from 110 to 250 V: worldwide use possible
- Tough spring clip of non-rusting stainless steel
- Solid brass earthing contact
- VDE and GS tested



SB 255-3

Order-No.

32201

 \oplus

3.0

255-7 Blade: Handle: Application:	Single- Chrome Black v For det	e-vanadiur vith clip.	n steel, t Iternating	g voltages ir	lened, black-fin	ish. nge up to 250 vo	lts
	Suitable	e for trade	and indu	istry profess	ionals.		
Order-No.	\oplus		 .	- +			
00456	3.0	60	160	17		10	

SB 255-7 Single-pole voltage tester 150-250 Volt in blister pack.

Order-No.	\oplus	==	=		—
31771	3.0	60	160	17	1



Wiha SoftFinish[®] ESD.

For use on electrostatically sensitive components.



Wiha SoftFinish[®] ESD screwdrivers have a surface resistance of 10⁶ - 10⁹ ohms.

For work on electrostatically sensitive devices and assemblies, there is no better screwdriver than the Wiha SoftFinish® ESD, with integrated soft zone in the multi-component- handle. The dissipative handle with a surface resistance of 10⁶ - 10⁹ ohms discharges the electrostatic energy in a controlled manner to protect devices at risk from electrostatic discharge.

The ergonomic handle form was developed from the basis of extensive scientific investigations in cooperation with the Fraunhofer Institute. The result is a multicomponent handle with a seamless outer form. Each hand size adapts perfectly to screwdriver, there are no pressure points while working and loading of the finger joints is minimised.

64 wiha

The SoftFinish® ESD screwdrivers feature an impressive and ergonomic multi-component handle.



The hard handle core consists of impact resistant polypropylene. The thermoplastic elastomer handle provides for a pleasant, safe and slip-proof grip. The inseparable handle is connected to the core by a moulding process. The high-quality blade of chromevanadium- molybdenum steel is through hardened and mattechrome plated. The Wiha ChromTop® blade tip ensures a perfect fit in every screw head. Wiha SoftFinish® ESD screwdrivers correspond to the internationally specified ESD standards IEC 61340-5-1.



- Dissipative handle designed to discharge uniformly, surface resistance 10⁶ 10⁹ ohms
- Meets ESD standard IEC 61340-5-1
- Ergonomic SoftFinish® multicomponent handle guarantees comfortable work and optimised handling
- Blade made of high-quality CVM steel, through hardened and chrome plated
- Wiha ChromTop[®] blade tip ensure a perfect fit in every screw head



Safety Notice: Wiha ESD screwdrivers are noninsulated, therefore not suitable for working on live parts.

08183

۲

5.5

6.5

125

150

1,0

1,2

5,5

6,0

236

268

30

36

10

10

www.wiha.com



For slotted, Phillips and Pozidriv screws.

\square		wiha	•
302ESD	SoftFinish [®] ESD slotted screwdriver.		

	Dissipa	tive hand	le, ESD	-safe.							
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened										
	chrome	-plated.									
	Wiha ChromTop® finish on tip for a perfect fit every time.										
Handle:	Ergonor	nic Wiha S	SoftFinis	h® mult	i-compo	nent hand	dle with				
	roll-off p	protection.	Surface	e resista	nce 106	- 10 ⁹ ohn	ns.				
Standards:	IEC 613	840-5-1.									
Application:	For wor	king on ele	ectrosta	tically se	ensitive o	componer	nts.				
Order-No.	Ф	→	\ominus ;	•1			-				
08179	2.5	75	0,4	2,5	179	23	10				
27150	3.0	100	0,5	3,0	204	23	10				
27151	4.0	100	0,8	4,0	211	30	10				

For slotted, Phillips and Pozidriv screws.

II wiha

wiha 🗢



302ESD	SoftFinish® ESD slotted screwdriver Stubby.								
	Dissipative handle, ESD-safe.								
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,								
	chrome-plated.								
	Wiha ChromTop® finish on tip for a perfect fit every time.								
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with								
	roll-off protection. Surface resistance 106 - 109 ohms.								
Standards:	IEC 61340-5-1.								
Application:	For working on electrostatically sensitive components.								
Order-No.									
00454	10 05 0.0 1.0 01 0.1 10								

Order-No.	Ψ		Ði				
32151	4.0	25	0,8	4,0	81	34	10
32152	5.5	25	1,0	5,5	81	34	10
32153	6.5	25	1,2	6,5	81	34	10



	Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection. Surface resistance 106 - 109 ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.

Order-No.	Ð		•1	==		-
08184	PH0	60	3,0	164	23	10
08185	PH1	80	4,5	191	30	10
08186	PH2	100	6,0	218	36	10

311ESD	SoftFinish® ESD Phillips screwdriver Stubby.
	Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
	roll-off protection. Surface resistance 106 - 109 ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Order-No.	⊕ ●:

	Order-No.	Ð		- Ol -	_		—
	32154	PH1	25	4,5	81	34	10
	32155	PH2	25	6,0	81	34	10
_							

)			
					ED		wiha 👄		-
313ESD		sh® ESD ive hand			driver.			313ESD	SoftFin Dissipa
Blade:	High qua chrome-	ality chron plated.	ne-vana	adium-m	olybdenum a perfect fil	,	ough hardened, e.	Blade:	High qu chrome Wiha Cl
Handle:	Ergonom	nic Wiha S	SoftFinis	sh® multi	-componei nce 10 ⁶ - 1	nt handle		Handle:	Ergonoi roll-off p
Standards:	IEC 6134	40-5-1.						Standards:	IEC 613
Application:	For work	ting on ele	ectrosta	itically se	ensitive con	nponents.		Application:	For wor
Order-No.	*		•1		<u>+</u>			Order-No.	*
26928	PZ0	60	3,0	164	23		10	32156	PZ1
26929	PZ1	80	4,5	191	30		10	32157	PZ2

				· · · ·			
313ESD	SoftFin	ish® ESD	Pozidriv	screw	driver Stul	bby.	
	Dissipa	tive handl	e, ESD	-safe.			
Blade:	High qu chrome	,	ne-vanad	dium-ma	olybdenum	steel, through hardened,	
	Wiha Cl	nromTop® 1	finish on	tip for a	a perfect fit	every time.	
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10 ⁶ - 10 ⁹ ohms.						
Standards:	IEC 613	40-5-1.					
Application:	For working on electrostatically sensitive components.						
Order-No.	*		•	·			
32156	PZ1	25	4,5	81	34	10	
32157	PZ2	25	6,0	81	34	10	



Wiha SoftFinish[®] ESD.

For use on electrostatically sensitive components.

For TORX	For TORX [®] screws.						Sets.	
	_				es estatemente estatem estatemente estatemente estatem	wiha •		
362ESD		sh® ESD tive hand			lriver.			
Blade:	chrome-	plated.			olybdenum a perfect fit	steel, through hardened,	$ \bigcirc $	witha witha witha
Handle:	Ergonon	nic Wiha S	SoftFinis	sh® multi		t handle with		
Standards:	IEC 6134	40-5-1.					302ESD HK5 01	SoftFinish® ESD slotted/ Phillips screwdriver set, 5 pcs.
Application:	For work	king on ele	ectrosta	tically se	ensitive com	ponents.		Dissipative handle, ESD-safe.
							Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
Order-No.	۲	—			<u> </u>	-		chrome-plated.
31432	Т3	60	2,5	164	23	10		Wiha ChromTop [®] finish on tip for a perfect fit every time.
27148	T4	60	2,5	164	23	10	Handle:	Ergonomic Wiha SoftFinish® multi-component handle with
27641	T5	60	3,5	164	23	10		roll-off protection. Surface resistance 10 ⁶ - 10 ⁹ ohms.
27149	T6	60	3,5	164	23	10	Standards:	IEC 61340-5-1.
31901	T7	60	3,5	164	23	10	Application:	For working on electrostatically sensitive components.
22436	T8	60	3,5	164	23	10		
27145	Т9	60	4,0	171	30	10	Order-No.	Series -
	T10	80	4,0	191	30	10	27252	302ESD HK5 01 1
27144	110	00						
27144 27146	T15	80	4,0	191	30	10	Ð	302ESD 3.0x100 4.0x100

Standards: Application:	Dissipative High quality chrome-pla Wiha Chron Ergonomic roll-off prot IEC 61340	e handle, E y chrome-va ated. mTop [®] finish Wiha SoftF ection. Surf -5-1.	SD-safe. anadium-mol n on tip for a inish [®] multi-c ace resistanc	iver set, 5 pcs. ybdenum steel perfect fit every component har ze 10° - 10° ohi	, through hardened, / time. Idle with ms.
Order-No.	Series				—
27253	362ESD K	5			1
۲	362ESD	T6x60 T10x80	T8x60 T15x80	T9x60	

8

Safety Notice: Wiha ESD screwdrivers are noninsulated, therefore not suitable for working on live parts.

.



www.wiha.com

Wiha Precision ESD.

The static dissipative precision screwdriver.



Wiha ESD precision screwdrivers with the successful handle geometry. Due to the surface resistance of 10⁶ - 10⁹ ohms, defined electrostatic discharge is guaranteed.



Electrostatic discharges are a major problem, since even low voltages can damage sensitive components.

Various factors have to be considered in order to understand the problem. In ESD protection areas, the electrostatic charge is safely conducted to earth. Users have to wear the appropriate ESD footwear or grounded wrist strap. The tools used also have to be electrostatically protected.

The ESD screwdrivers from Wiha conform to the international ESD Standards IEC 61340-5-1. Due to the electrical surface resistance, 10⁶ - 10⁹ Ohm, defined electrostatic discharge is guaranteed.



antistatischlantistatic

Thanks to the rotating cap, incremental adjusting is easy. The large handle enables powerful tightening and loosening of screws.

The dissipative Precision ESD - for working on electrostatically sensitive components.

Safety Notice: Wiha ESD screwdrivers are noninsulated, therefore not suitable for working on live parts. The rotating cap with contact area makes incremental adjustment quick and easy.

Germany

Wiha Precision ESD.

- Dissipative handle designed to discharge uniformly, surface resistance 10⁶ 10⁹ ohms
- Meets ESD standard IEC 61340-5-1
- Rotating cap with large surface for extra fast working
- Large handle end for powerful tightening and loosening screws
- Wiha ChromTop®-finish on tip for a perfect fit every time

wiha the 67

Wiha Precision ESD.

The static dissipative precision screwdriver.

For slotted, Phillips and Pozidriv screws.

\square	and solver solver had here and a solution of
272	Precision ESD slotted screwdriver.
	Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Order-No.	

07634	1.5	40	0,25	2,0	120	12,5	10
07635	2.0	40	0,40	2,0	120	12,5	10
07636	2.5	50	0,40	2,5	145	13,0	10
07637	3.0	50	0,50	3,0	145	13,0	10
07638	3.5	60	0,60	3,5	170	14,0	10
07639	4.0	60	0,80	4,0	170	14,0	10

275 Precision ESD hex screwdriver.

 Dissipative handle, ESD-safe.

 Blade:
 High quality chrome-vanadium-molybdenum steel, through hardened,

For hex nuts and hex socket screws.

chrome-plated.

 $\begin{array}{ll} \mbox{Wiha ChromTop}^{\oplus} \mbox{ finish on tip for a perfect fit every time.} \\ \mbox{Handle:} & \mbox{Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms.} \end{array}$

2. 3.0 x 6

10

Standards: IEC 61340-5-1.


Application: For working on electrostatically sensitive components.

Order-No.	۲	☴■			—
27707	0.7	40	120	12,5	10
27708	0.9	40	120	12,5	10
07644	1.3	40	120	12,5	10
07645	1.5	50	145	13,0	10
07646	2	50	145	13,0	10
07647	2.5	60	170	14,0	10
07648	3	60	170	14,0	10
32315	4	60	170	14,0	10



Application: For working on electrostatically sensitive components.

Order-No.	Ð	⇒■				—
28053	PH000	40	2,0	120	12,5	10
07640	PH00	40	2,0	120	12,5	10
07641	PH0	50	3,0	145	13,0	10
07642	PH1	60	4,0	170	14,0	10



 	exa relating lipple-medition lipple and anticitating for the website	PZ1 x 60

274	Precision ESD Pozidriv screwdriver. Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle: Standards: Application:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms. IEC 61340-5-1. For working on electrostatically sensitive components.
Order-No.	

07643	PZ1	60	4,0	170	14	10
Order-No.		\leftrightarrow		$\leftarrow \rightarrow$		

not conversion matters and solutionstate Solutionstate

Precision ESD hex nut driver. Dissipative handle, ESD-safe.

60 170 14,0

 Blade:
 Chrome-vanadium steel, through hardened, chrome-plated.

 Handle:
 Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ ohms.

 Standards:
 IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	0	— ■	¢⊡ =	ф -			-
32312	1.5	60	2,5	-	155	13,0	10
32313	2.0	60	2,9	-	155	13,0	10
07653	2.5	60	4,0	4,0	155	13,0	10
07654	3	60	5,0	5,0	155	13,0	10
07655	3.5	60	5,3	6,0	155	13,0	10
07656	4	60	5,5	6,0	155	13,0	10
32314	4.5	60	6,2	7,0	155	13,0	10
07657	5	60	6,8	7,0	155	13,0	10
07658	5.5	60	7,6	8,0	170	14,0	10



۲

07652

277

www.wiha.com



For TORX[®] screws.

-	
۲	Anticalization anticalization and the second anticalization antica

 (\diamond)

278IP

Blade:

Handle:

Standards:

Application:

278	Precision ESD TORX [®] screwdriver.
	Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Order-No.	

oraci no.	÷			\leftarrow	*	
25676	T1	40	2,5	120	12,5	10
25677	T2	40	2,5	120	12,5	10
21256	Т3	40	2,5	120	12,5	10
21255	T4	40	2,5	120	12,5	10
07659	T5	40	2,5	120	12,5	10
07660	T6	40	2,5	120	12,5	10
07661	T7	40	2,5	120	12,5	10
07662	T8	40	2,5	120	12,5	10
07663	Т9	50	3,0	145	13,0	10
07664	T10	50	3,0	145	13,0	10
07665	T15	60	3,5	170	14,0	10
07666	T20	60	4,0	170	14,0	10

Order-No. ۲ 28198 4IP 40 2,5 120 12,5 10 27761 5IP 10 40 2,5 120 12,5 27762 6IP 40 2,5 120 12,5 10 27763 7IP 40 120 10 2,5 12.5 27764 8IP 40 2,5 120 12,5 10 27765 9IP 10 50 3,0 145 13,0 27766 10IP 50 3,0 145 13,0 10 27767 15IP 60 3,5 170 14,0 10

Wiha ChromTop® finish on tip for a perfect fit every time.

For working on electrostatically sensitive components.

High quality chrome-vanadium-molybdenum steel, through hardened,

Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ ohms.

Precision ESD TORX PLUS® screwdriver. Dissipative handle, ESD-safe.

For TORX PLUS[®] screws. Chip lifter.

chrome-plated.

IEC 61340-5-1.



۲

278R	Precision ESD TORX [®] MagicSpring [®] screwdriver.
	Dissipative handle, ESD-safe.Retaining spring holds TORX® screws
	in place.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Order-No.	

Order-No.		\rightarrow		\rightarrow		
27748	T6	40	2,5	120	12,5	10
27749	T7	40	2,5	120	12,5	10
27759	Т8	40	2,5	120	12,5	10
27750	Т9	50	3,0	145	13,0	10
27751	T10	50	3,0	145	13,0	10
27752	T15	60	3,5	170	14,0	10



279-10	Precision ESD chip lifter.	
	Dissipative handle, ESD-safe.	
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,	
	chrome-plated.	
Handle:	Precision handle, surface resistance 10 ⁶ - 10 ⁹ ohms.	
Standards:	IEC 61340-5-1.	
Application:	For lifting tight parts on circuit boards.	
Order-No.		
07667	3.5 50 145 13,0 10	



Wiha MagicSpring®:

stainless steel spring reliably holds TORX[®] or TORX PLUS[®] screws in place.

wiha wiba 69

Wiha Precision ESD.

The static dissipative precision screwdriver.

ESD screwdriver sets.

 $\mathbf{\tilde{\oplus}}$

۲



272 K6	Precision ESD slotted/ Phillips screwdriver set, 6 pcs. Dissipative handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Extra:	Practical plastic rack with hanging holes.
	In plastic box, can be opened and positioned on workbench.
Order-No.	Series

Order-No.	Series				=	_
08463	272 K6					1
Ð	272	1.5x40	2.0x40	2.5x50	3.0x50	
\oplus	273	PH00x40	PH0x50			

ESD screwdriver sets.



277 K6	Precision ESD hex nut driver set, 6 pcs.
	Dissipative handle, ESD-safe.
Blade:	Chrome-vanadium steel, through hardened, chrome-plated.
Handle:	Precision handle with rotating cap, surface resistance 10 ⁶ - 10 ⁹ ohms.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Extra:	Practical plastic rack with hanging holes.
	In plastic box, can be opened and positioned on workbench.

Order-No. Series

32279 27	7 K6			1
O 27	7 2.5x60 4x60	3x60 5x60	3.5x60 5.5x60	



275 K6 Blade: Handle: Standards: Application: Extra:	Precision ESD hex screwdriver set, 6 pcs. Dissipative handle, ESD-safe. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Precision handle with rotating cap, surface resistance 10° - 10° ohms. IEC 61340-5-1. For working on electrostatically sensitive components. Practical plastic rack with hanging holes.
Extra.	In plastic box, can be opened and positioned on workbench.
Order-No.	Series

Order-No.	Series				—
32278	275 K6				1
۲	275	0.9x40	1.3x40	1.5x50	
		2x50	2.5x60	3x60	



	Biolipatite nanale, 200 bare.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop [®] finish on tip for a perfect fit every time.
Handle: Standards:	Precision handle with rotating cap, surface resistance 10^6 - 10^9 ohms. IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
Extra:	Practical plastic rack with hanging holes.
	In plastic box, can be opened and positioned on workbench.
Order-No.	Series

Order-No.	Series				
26919	278 K6				1
۲	278	T5x40	T6x40	T7x40	
		T8x40	T10x50	T15x60	




www.wiha.com



The non-static adjustment tool for clean rooms.







The ceramic blades and handles are completely antimagnetic and anti-static. This is a fundamental requirement for working with highly sensitive components, such as capacitors, solenoids and various resistances. The ceramic blades are resistant to mechanical wear,

۲

acid corrosion and thermal shock stress. Wiha Ceramic screwdrivers are available with slotted and Phillips tips, as well as in a set.



With centring head and quick-turning zone for optimum handling.



					Ceramic ar 270 1,8x15 Mate in Gen		
270	Ceramic slotted screwdriver. Non-static adjustment tool with ceramic blade.						
Blade: Handle:	Made of h Wiha Prot	Made of high-quality special ceramic, anti-static/ anti-magnetic. Wiha Proturn® Precision handle with rotating cap, anti-static/anti-magnetic.					
Application:	Specially designed for tuning and adjusting high frequency devices, suited to cleanrooms.						
Order-No.	\oplus	╤╸	\ominus	•1		<u> </u>	
02163	0.9	15	0,35	1,75	94,5	12,5	10
02164	1.3	15	0,35	1,75	94,5	12,5	10
02167	1.8	15	0,35	1,75	94,5	12,5	10
02168	2.6	15	0,35	2,6	94,5	12,5	10
	-				Ceramic antig 271/PH0x15 Mistel in Centrary		

271 Ceramic Phillips screwdriver. Non-static adjustment tool with ceramic blade.

Order-No.	\oplus		•1			-
02169	PH0	15	2,6	94,5	12,5	10



211/PHOX15 Made in Germany

The ceramic blade and handle are completely anti-magnetic and anti-static.

Ceramic screwdriver set.

270



Ceramic slotted/ Phillips screwdriver set, 3 pcs. Non-static adjustment tool with ceramic blade. Blade[.] Made of high-quality special ceramic, anti-static/ anti-magnetic. Handle: Wiha Proturn® Precision handle with rotating cap, anti-static/anti-magnetic. Extra: Delivered in practical plastic box.

Order-No.	Series			
02171	270 HK3			1
Ð	270	0.9x15	2.6x15	
Ð	271	PH0x15		

Wiha Ceramic.

- Ideal for adjusting electrical components
- Suitable for working in clean rooms
- Anti-static and anti-magnetic handle and blade
- Rotating cap for easy working
- Resistant to mechanical wear, thermal shock stress and acidic corrosion

wiha (11) 71