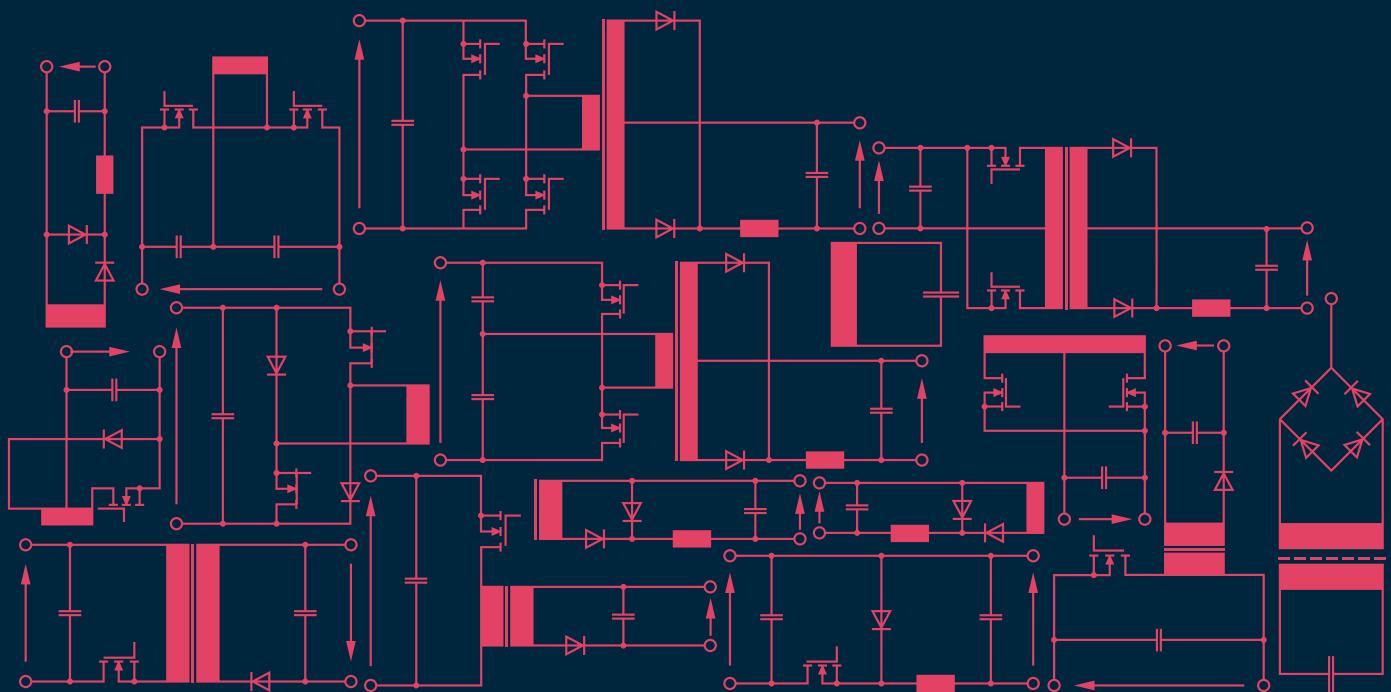


Product Portfolio 2015


DC/DC Converters

AC/DC Power Supplies



Non-Isolated Step Down DC/DC Converters (POL) SIP Package 0.5 – 30 Amp

- Alternative to linear voltage regulators
- High efficiency up to 97%
- No heat-sink required
- Over-temperature protection
- Excellent line/load regulation
- Operating temperature -40 – +85°C

TSR 0.5	NEW	0.5 AMP	TSR 1	1 AMP	TSN 1	NEW	1 AMP
<ul style="list-style-type: none"> • Pos. -pos. circuit • 1.5 to 15 VDC fixed • Input 4.6 – 36 VDC • LM78 compatible • 10.5 x 7.6 x 10.2 mm 			<ul style="list-style-type: none"> • Pos. -pos. circuit • 1.5 to 15 VDC fixed • Input 4.6 – 36 VDC • LM78 compatible • 10.5 x 7.6 x 10.2 mm 		<ul style="list-style-type: none"> • Neg. -neg. circuit • -5.0 to -15 VDC fixed • Input -7.0 – 32 VDC • LM79 compatible • 11.7 x 7.5 x 16.5 mm 		
TSRN 1		1 AMP	TSR 3	3 AMP	TOS		6 – 30 AMP
<ul style="list-style-type: none"> • Pos. -pos./neg. circuit • (\pm) 5.0 to 15 VDC fixed • Input 4.6 – 42 VDC • 11.7 x 7.5 x 10.2 mm 			<ul style="list-style-type: none"> • Pos. -pos./neg. circuit • (\pm) 0.6 to 15 VDC adjust. • Input 2.5 – 30 VDC • Remote On/Off • Open frame 		<ul style="list-style-type: none"> • Pos. -pos. circuit • 0.75 – 5.5 VDC adjust. • Input 2.4 – 14 VDC • Remote On/Off • Open frame 		

Non-Isolated Step Down DC/DC Converters (POL) SMD Package 0.5 – 30 Amp

- Alternative to linear regulators
- High efficiency up to 97%
- No heat-sink required
- Over-temperature protection
- Excellent line/load regulation
- Operating temperature -40 – +85°C

TSR 0.5SM	NEW	0.5 AMP	TSR 1SM	NEW	1 AMP	TSRN 1SM	1 AMP
<ul style="list-style-type: none"> • Pos. -pos. circuit • 1.4 to 15.5 VDC adjust. • Input 4.75 – 32 VDC • Remote On/Off • 15.3 x 9.6 x 9.2 mm 			<ul style="list-style-type: none"> • Pos. -pos. circuit • 1.2 to 15 VDC fixed • Input 3.0 – 36 VDC • 15.2 x 9.3 x 10.2 mm 			<ul style="list-style-type: none"> • Pos. -pos./neg. circuit • (\pm) 1.2 to 15.5 VDC adjust. • Input 3.3 – 42 VDC • Remote On/Off • 11.7 x 7.5 x 10.2 mm 	
TOS		6 – 30 AMP					
<ul style="list-style-type: none"> • Pos. -pos circuit • 0.75 to 5.5 VDC adjust. • Input 2.4 – 14 VDC • Remote On/Off • Open frame 							

SMD DC/DC Converters 1 – 15 Watt

- MSL Level 2 or better
- Operating temperature -40 – +85°C
- 1500 VDC I/O-isolation (standard)
- Regulated, single and dual output models
- Available in tape & reel package

TES 1	1 WATT	TES 1V	1 WATT	TMR 1SM NEW	1 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC (unregulated) • ±10% Input 5, 12, 24 VDC • 13.7 x 8.0 x 7.0 mm 		<ul style="list-style-type: none"> • 3000 VDC I/O-isolation • 3.3 to 15 VDC (unregulated) • ±10% Input 5, 12, 24 VDC • 16.3 x 8.0 x 8.0 mm 		<ul style="list-style-type: none"> • 5.0 to 15 VDC • 2:1 Input 4.5 to 75 VDC • 18.9 x 13.7 x 8.7 mm 	
TES 2H	2 WATT	TES 2N	2 WATT	TES 2M	2 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC (unregulated) • ±10% Input 5, 12, 24 VDC • 13.7 x 9.3 x 8.9 mm 		<ul style="list-style-type: none"> • EN 55022 class A filter • 3.3 to 15 VDC • 2:1 Input 4.5 to 75 VDC • IEC/UL 60950-1 • 24.0 x 13.7 x 8.3 mm 		<ul style="list-style-type: none"> • 4 kVAC I/O-isolation • 5.0 to 15 VDC (unregulated) • ±10% Input 5, 12, 24 VDC • IEC/UL 60950-1, 60601-1 • 24.0 x 13.7 x 9.3 mm 	
TDR 2SM	2 WATT	TDR 2WISM	2 WATT	TDR 3SM	3 WATT
<ul style="list-style-type: none"> • Epoxy over mold (washable) • 5.0 to 15 VDC • 2:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 18.9 x 12.8 x 8.7 mm 		<ul style="list-style-type: none"> • Epoxy over mold (washable) • 5.0 to 15 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 18.9 x 12.8 x 8.7 mm 		<ul style="list-style-type: none"> • Epoxy over mold (washable) • 5.0 to 15 VDC • 2:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 18.9 x 12.8 x 8.7 mm 	
TDR 3WISM	3 WATT	THL 3WISM	3 WATT	THL 6WISM	6 WATT
<ul style="list-style-type: none"> • Epoxy over mold (washable) • 5.0 to 15 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 18.9 x 12.8 x 8.7 mm 		<ul style="list-style-type: none"> • EN 55022 class A filter • 3.3 to 24 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 24.0 x 13.7 x 8.3 mm 		<ul style="list-style-type: none"> • EN 55022 class A filter • 3.3 to 24 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 22.0 x 20.3 x 10.2 mm 	
TON 15SM	15 WATT	TON 15SWISM	15 WATT		
<ul style="list-style-type: none"> • EN 55022 class A filter • 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 28.2 x 23.9 mm 		<ul style="list-style-type: none"> • EN 55022 class A filter • 3.3 to 15 VDC adjust. • 4:1 Input 4.5 to 75 VDC • Remote On/Off • IEC/UL 60950-1 • 28.2 x 23.9 mm 			

SIP DC/DC Converters 1 – 8 Watt

- Single and dual output models (standard)
- Operating temperature -40 – +85°C
- 1500 VDC I/O-isolation (standard)
- IT approval to IEC/EN/UL 60950-1 (for regulated and high isolation converters)


TMA	1 WATT	TME	1 WATT	TRA 1	1 WATT	
<ul style="list-style-type: none"> • Unregulated • 3.3 to 15 VDC • ±10% Input 3.3 to 24 VDC • 19.5 x 6.1 x 10.2 mm 		<ul style="list-style-type: none"> • Unregulated • Compact design • 5 to 15 VDC (single only) • ±10% Input 5 to 24 VDC • 11.5 x 6.1 x 10.2 mm 		<ul style="list-style-type: none"> • Semi regulation (load) • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 19.5 x 6.1 x 10.2 mm 		
TMV	1 WATT	TMV HI	NEW	TMV EN	1 WATT	
<ul style="list-style-type: none"> • Unregulated • 3000 VDC I/O-isolation • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 19.5 x 6.1 x 10.2 mm 		<ul style="list-style-type: none"> • Unregulated • 5200 VDC I/O-isolation • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 19.5 x 7.1 x 10.2 mm 		<ul style="list-style-type: none"> • Unregulated • 3000 VDC reinforced I/O-isolation • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 22 x 7.5 x 12.5 mm 		
TRV 1	1 WATT	TMR 1	NEW	TMH	2 WATT	
<ul style="list-style-type: none"> • Semi regulation (load) • 3000 VDC I/O-isolation • 5.0 to 15 VDC (single only) • ±10% Input 5 to 24 VDC • 19.5 x 6.1 x 10.2 mm 		<ul style="list-style-type: none"> • Regulated • 5.0 to 24 VDC • 2:1 Input 4.5 to 75 VDC • 17 x 7.6 x 11 mm 		<ul style="list-style-type: none"> • Unregulated • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 19.5 x 7.5 x 10.2 mm 		
TMR 2E	2 WATT	TMR 2	2 WATT	TMR 2WIN	NEW	2 WATT
<ul style="list-style-type: none"> • Regulated, cost optimized • 3.3 to 12 VDC (single only) • 2:1 Input 4.5 to 75 VDC • Remote On/Off • (I/O-isolation 1000 VDC) • 21.8 x 9.3 x 11.2 mm 		<ul style="list-style-type: none"> • Regulated • 3.3 to 15 VDC • 2:1 Input 4.5 to 75 VDC • Remote On/Off • 21.8 x 9.3 x 11.2 mm 		<ul style="list-style-type: none"> • Regulated • 3.3 to 15 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • 21.8 x 9.3 x 11.2 mm 		
TRA 3	3 WATT	TMR 3E	3 WATT	TMR 3	3 WATT	
<ul style="list-style-type: none"> • Semi regulation (load) • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 19.5 x 7.6 x 10.2 mm 		<ul style="list-style-type: none"> • Regulated, cost optimized • 3.3 to 15 VDC • 2:1 Input 4.5 to 75 VDC • Remote On/Off • (min. load required) • 21.8 x 9.3 x 11.2 mm 		<ul style="list-style-type: none"> • Regulated • 3.3 to 15 VDC • 2:1 Input 4.5 to 75 VDC • EN 55022 class A filter • Remote On/Off • 21.8 x 9.1 x 11.2 mm 		
TMR 3HI	3 WATT	TMR 3WE	3 WATT	TMR 3WI	3 WATT	
<ul style="list-style-type: none"> • Regulated • 3000 VDC I/O-isolation • 3.3 to 15 VDC • 2:1 Input 4.5 to 75 VDC • Remote On/Off • EN 55022 class A filter • 21.8 x 9.1 x 11.1 mm 		<ul style="list-style-type: none"> • Regulated, cost optimized • 3.3 to 15 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • (min. load required) • 21.8 x 9.1 x 11.2 mm 		<ul style="list-style-type: none"> • Regulated • 3.3 to 15 VDC • 4:1 Input 4.5 to 75 VDC • Remote On/Off • 21.8 x 9.1 x 11.2 mm 		

TMR 6	6 WATT	TMR 6WI	NEW	6 WATT	TMR 9	NEW	9 WATT
<ul style="list-style-type: none"> Regulated 3.3 to 24 VDC 2:1 Input 4.5 to 75 VDC Remote On/Off 21.8 x 9.1 x 11.2 mm 		<ul style="list-style-type: none"> Regulated 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC Remote On/Off 21.8 x 9.1 x 11.2 mm 			<ul style="list-style-type: none"> Regulated 3.3 to 24 VDC 2:1 Input 4.5 to 75 VDC Remote On/Off 21.8 x 9.1 x 11.2 mm 		
TMR 9WI	NEW	9 WATT					
<ul style="list-style-type: none"> Regulated 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC Remote On/Off 21.8 x 9.1 x 11.2 mm 							

High Performance DC/DC Converters 2 – 60 Watt

- Fully regulated outputs
- Single, dual (and triple) output models
- 1500 VDC I/O-isolation (standard)
- IT approval to IEC/EN/UL 60950-1
- Operating temperature -40 – +85°C
- Remote On/Off control


TEL 2	2 WATT	TDR 2	2 WATT	TDR 2WI	2 WATT
<ul style="list-style-type: none"> 3.3 to 15 VDC 2:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-16 (23.8 x 13.7) 		<ul style="list-style-type: none"> Compact design Epoxy over mold 5.0 to 15 VDC 2:1 Input 4.5 to 75 VDC 18.9 x 12.8 x 8.7 mm 		<ul style="list-style-type: none"> Compact design Epoxy over mold 5.0 to 15 VDC 4:1 Input 4.5 to 75 VDC 18.9 x 12.8 x 8.7 mm 	
TEM 3N	NEW	3 WATT	TEL 3	3 WATT	TEN 3N
<ul style="list-style-type: none"> Cost down redesign 5.0 to 15 VDC ±10% Input 5 to 24 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> Cost optimized 5.0 to 15 VDC 2:1 Input 4.5 to 75 VDC DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> Cost down redesign 3.3 to 24 VDC 2:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 	
TEN 3WIN	NEW	3 WATT	THL 3WI	3 WATT	TDR 3
<ul style="list-style-type: none"> Cost down redesign 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> 3.3 to 24 VDC 4:1 Input 9 to 75 VDC EN 55022 class A filter DIP-16 (23.8 x 13.7) 		<ul style="list-style-type: none"> Compact design Epoxy over mold 5.0 to 15 VDC 2:1 Input 4.5 to 75 VDC 18.9 x 12.8 x 8.7 mm 	
TDR 3WI	3 WATT	TVN 5WI	NEW	5 WATT	TEL 5
<ul style="list-style-type: none"> Compact design Epoxy over mold 5.0 to 15 VDC 4:1 Input 4.5 to 75 VDC 18.9 x 12.8 x 8.7 mm 		<ul style="list-style-type: none"> Ultra low ripple & noise 3.3 to 24 VDC 4:1 Input 9 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> Cost optimized 3.3 to 15 VDC 2:1 Input 9 to 36 VDC DIP-24 (32 x 20.3) 	

TEN 6N	6 WATT	TEN 6WIN	6 WATT	TEN 6WIN HI	6 WATT
<ul style="list-style-type: none"> • 3.3 to 24 VDC • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3.3 to 24 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3000 VDC I/O-isolatin • 3.3 to 24 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 	
TEN 8	8 WATT	TEN 8WI	8 WATT	THD 10N NEW	10 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC • 2:1 Input 9 to 75 VDC • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • Railway approval • 3.3 to 15 VDC • 4:1 Input 9 to 160 VDC • Increased EMC immunity • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3.3 to 15 VDC • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 	
THD 10WIN NEW	10 WATT	THL 10 NEW	10 WATT	THL 10WI	10 WATT
<ul style="list-style-type: none"> • 3.3 to 24 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3.3 to 24 VDC • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • 1" x 1" 		<ul style="list-style-type: none"> • 3.3 to 24 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • 1" x 1" 	
THD 12	12 WATT	THD 12WI	12 WATT	THD 15N	15 WATT
<ul style="list-style-type: none"> • 2.5 to 15 VDC • 2:1 Input 9 to 75 VDC • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3.3 to 15 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • 3.3 to 15 VDC • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 	
THD 15WIN	15 WATT	TEL 15	15 WATT	TON 15	15 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> • Cost optimized • 3.3 to 15 VDC • 2:1 Input 9 to 75 VDC • 2" x 1" 		<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • 28.2 x 23.9 mm 	
TON 15WI	15 WATT	THN 15	15 WATT	THN 15WI	15 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 4:1 Input 4.5 to 75 VDC • EN 55022 class A filter • 28.2 x 23.9 mm 		<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • 1" x 1" 		<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • 1" x 1" 	
THN 20	20 WATT	THN 20WI	20 WATT	THL 20WI	20 WATT
<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • 1" x 1" 		<ul style="list-style-type: none"> • 3.3 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • 1" x 1" 		<ul style="list-style-type: none"> • 3.3 to 24 VDC adjust. • 4:1 Input 9 to 75 VDC • 1" x 1" 	

TEN 20	20 WATT	TEN 20WIN	20 WATT	TEN 20WIR	20 WATT
<p>• 3.3 to 15 VDC • 2:1 Input 9 to 75 VDC • EN 55022 class A filter • 2" x 1"</p> 		<p>• 3.3 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• Railway approval • EN 55022 class B filter • 3.3 to 15 VDC adjust. • 4:1 Input 9 to 160 VDC • Increased EMC immunity • 2" x 1"</p> 	
TMDC 20 NEW	20 WATT	THL 25	25 WATT	THL 25WI NEW	25 WATT
<p>• Chassis/DIN-rail • Screw terminal connection • 5.1 to 48 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • 96 x 54 x 23.3 mm</p> 		<p>• 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • 1" x 1"</p> 		<p>• 3.3 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • 1" x 1"</p> 	
TEN 30	30 WATT	TEN 30WIN	30 WATT	THN 30	30 WATT
<p>• 1.5 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• With triple output models • 1.5 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• 3.3 to 24 VDC adjust. • 2:1 Input 9 to 75 VDC • 1" x 1"</p> 	
THN 30WI	30 WATT	TEN 40	40 WATT	TEN 40WI	40 WATT
<p>• 3.3 to 24 VDC adjust. • 4:1 Input 9 to 75 VDC • 1" x 1"</p> 		<p>• With triple output models • 3.3 to 15 VDC adjust. • 2:1 Input 9 to 75 VDC • Sense line • 2" x 2"</p> 		<p>• 3.3 to 15 VDC adjust. • 4:1 Input 9 to 75 VDC • Sense line • 2" x 2"</p> 	
TEN 40N	40 WATT	TEN 40WIN	40 WATT	TEN 40WIR	40 WATT
<p>• 3.3 to 24 VDC adjust. • 2:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• 3.3 to 24 VDC adjust. • 4:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• Railway approval • 3.3 to 24 VDC adjust. • 4:1 Input 9 to 160 VDC • Increased EMC immunity • 2" x 1"</p> 	
TMDC 40 NEW	40 WATT	TEN 50	50 WATT	TEN 50WI	50 WATT
<p>• Chassis / DIN-rail • Screw terminal connection • 5.1 to 48 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • 112 x 64 x 25.6 mm</p> 		<p>• 3.3 to 24 VDC adjust. • 2:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• 3.3 to 24 VDC adjust. • 4:1 Input 9 to 75 VDC (single output models only) • 2" x 1"</p> 	
TEN 60N NEW	60 WATT	TEN 60WIN NEW	60 WATT	TMDC 60 NEW	60 WATT
<p>• 5.0 to 24 VDC adjust. • 2:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• 5.0 to 24 VDC adjust. • 4:1 Input 9 to 75 VDC • 2" x 1"</p> 		<p>• Chassis / DIN-rail • Screw terminal connection • 5.1 to 48 VDC • 4:1 Input 9 to 75 VDC • EN 55022 class A filter • 112 x 68 x 38 mm</p> 	

High Power DC/DC Converters 75 – 300 W

- Excellent thermal management
- EN 55022 class A (chassis models)
- Increased EMC immunity
- Entire protective structure
- Control functions
- Wide selection of options

TEP 75WI	75 WATT	TEP 100	100 WATT	TEP 100WIR NEW 100 WATT
<ul style="list-style-type: none"> • Railway approval • 5.0 to 48 VDC adjust. • 4:1 Input 9 to 160 VDC • PCB / chassis / DIN-rail • 2.4" x 2.3" x 0.5" 		<ul style="list-style-type: none"> • 3.3 to 48 VDC adjust. • 2:1 Input 9 to 75 VDC • PCB mount • 2.4" x 2.3" x 0.5" 		<ul style="list-style-type: none"> • Railway approval • 12 to 48 VDC adjust. • 4:1 Input 9 to 160 VDC • PCB / chassis / DIN-rail • 2.4" x 2.3" x 0.5" 
TEQ 100WIR NEW 100 WATT		TEP 150WI	150 WATT	TEP 160
<ul style="list-style-type: none"> • Railway approval • 85°C full load operation • 12 to 48 VDC adjust. • 4:1 Input 8.5 to 160 VDC • UL 508 approval • 3" x 4" x 3.5" 		<ul style="list-style-type: none"> • CV/CC for battery charging • Railway approval • 12 to 48 VDC adjust. • 4:1 Input 9 to 160 VDC • EN 55022 class B (opt.) • 90 x 65 x 38 mm 		<ul style="list-style-type: none"> • 12 to 48 VDC adjust. • 2:1 Input 16.5 to 75 VDC • PCB mount • 2.4" x 2.3" x 0.5" 
TEP 160WIR	160 WATT	TEQ 160WIR NEW 160 WATT		TEP 200WIR
<ul style="list-style-type: none"> • Railway approval • 12 to 48 VDC adjust. • 4:1 Input 8.5 to 75 VDC • PCB mount • 2.4" x 2.3" x 0.5" 		<ul style="list-style-type: none"> • Railway approval • 75°C full load operation • 12 to 48 VDC adjust. • 4:1 Input 18 to 160 VDC • UL 508 approval • 3" x 4" x 3.5" 		<ul style="list-style-type: none"> • Railway approval • 12 to 48 VDC adjust. • 4:1 Input 8.5 to 75 VDC • Chassis mount • 2.4" x 3.4" x 1.5" 
TEQ 200WIR NEW 200 WATT		TEQ 300WIR NEW 300 WATT		
<ul style="list-style-type: none"> • Railway approval • 70°C full load operation • 12 to 48 VDC adjust. • 4:1 Input 18 to 160 VDC • UL 508 approval • 3" x 4" x 3.5" 		<ul style="list-style-type: none"> • CV/CC for battery charging • Railway approval • 12 to 48 VDC adjust. • 4:1 Input 18 to 160 VDC • UL 508 approval • 6" x 4" x 1.5" 		

**⊕ Medical/Reinforced I/O-Isolation
DC/DC Converters 1 – 10 Watt**

- IEC/ES 60601-1 3rd edition and IEC/EN/UL 60950-1 approvals
- I/O-isolation min. 3000 VACrms
- Working voltage 300 VAC or higher
- Operating temperature -40 – +85°C
- EN 55022 class A for regulated models

TMV-EN	1 WATT	TES 2M	2 WATT	THI 2M	2 WATT
<ul style="list-style-type: none"> • Unregulated • 5.0 to 15 VDC • ±10% Input 5 to 12 VDC • (no 60601-1 approval) • SIP package • 22 x 7.5 x 12.5 mm 		<ul style="list-style-type: none"> • Unregulated • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • SMD package • 24.0 x 13.7 x 9.3 mm 		<ul style="list-style-type: none"> • Unregulated • 5.0 to 15 VDC • ±10% Input 5 to 24 VDC • 23.8 x 13.7 x 8.6 mm 	

THI 3	NEW	3 WATT	THB 3	3 WATT	THP 3	3 WATT
<ul style="list-style-type: none"> Regulated 5.0 to 15 VDC ±10% Input 5 to 24 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 			<ul style="list-style-type: none"> Regulated 1000 Vrms working voltage 5.0 to 24 VDC 2:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> Regulated 5.0 to 15 VDC 4:1 Input 9 to 160 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 	
THM 3WI	NEW	3 WATT	THB 6	6 WATT	THM 6WI	NEW
<ul style="list-style-type: none"> Regulated 2 x MOPP 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 			<ul style="list-style-type: none"> Regulated 1000 Vrms working voltage 5.0 to 15 VDC 2:1 Input 9 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 		<ul style="list-style-type: none"> Regulated 2 x MOPP 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 	
THB 10		10 WATT	THM 10WI	NEW	10 WATT	
<ul style="list-style-type: none"> Regulated 5.0 to 15 VDC 2:1 Input 9 to 75 VDC EN 55022 class A filter 2" x 1" 			<ul style="list-style-type: none"> Regulated 2 x MOPP 3.3 to 24 VDC 4:1 Input 4.5 to 75 VDC EN 55022 class A filter DIP-24 (32 x 20.3) 			

Industrial DIN-Rail Mount DC/DC Converters 20 – 60 Watt

- IEC/EN/UL 60950-1 approvals
- Increased EMC immunity
- Operating temperature -40 – +65°C

TCL-DC	24 – 60 WATT	TMDC 20	NEW	20 WATT	TMDC 40	NEW	40 WATT
<ul style="list-style-type: none"> Slim plastic casing UL 508 approval 5 to 24 VDC 4:1 Input 9.5 to 75 VDC EN 55022 class B filter 75 x 100 x 27/45 mm 		<ul style="list-style-type: none"> Low profile casing 5.1 to 48 VDC 4:1 Input 9 to 75 VDC EN 55022 class A filter 96 x 54 x 23.3 mm 			<ul style="list-style-type: none"> Low profile casing 5.1 to 48 VDC 4:1 Input 9 to 75 VDC EN 55022 class A filter 112 x 64 x 25.6 mm 		
TMDC 60	NEW	60 WATT					
<ul style="list-style-type: none"> Low profile casing 5.1 to 48 VDC 4:1 Input 9 to 75 VDC EN 55022 class A filter 112 x 68 x 38 mm 							

High Voltage DC/DC Converters up to 2 kV

- Remote voltage programming 0 – 100%
- Positive or negative polarity
- Very low output ripple
- Excellent output stability
- Low temperature drift

THV	3 Watt	PHV	5 Watt
<p>• Slim SIP Package</p> <p>• 0-2000 VDC</p> <p>• 12 VDC</p> <p>• Remote On/Off</p> <p>• Opt. flying lead connect.</p> <p>• 80/110 x 12 x 20 mm</p>		<p>• Flat DIP package</p> <p>• 0-2000 VDC</p> <p>• 12 VDC</p> <p>• Excellent voltage stability</p> <p>• 60 x 40 x 15/20 mm</p>	

Industrial High Power Converters up to 22 kW

TZL	60 – 300 WATT	TSC	150 – 5000 WATT	TSC 19	5 kW – 22 kW
<p>• Compact metal casing</p> <p>• 12/24 VDC</p> <p>• 2:1 Input 18 to 72 VDC</p> <p>• EN 55022 class B filter</p>		<p>• 19" plug-in / chassis / DIN</p> <p>• 5 to 400 VDC</p> <p>• 2:1 Input 10 to 800 VDC</p> <p>• Entire protection circuit</p> <p>• Individual power solutions</p>		<p>• 19" sub rack</p> <p>• 5 to 800 VDC</p> <p>• 2:1 Input 40 to 800 VDC</p> <p>• Entire protection circuit</p> <p>• Individual power solutions</p>	

DC/AC CONVERTERS

Industrial Inverters

- 19" plug in modules and sub racks
- Single-/three-phase AC outputs
- True sine wave output 40 – 400 Hz

TSD	200 VA – 30 kVA
<p>• 10 to 800 VDC input models</p> <p>• AC input for frequency conversion</p> <p>• Configurable for individual power solutions</p>	


Open Frame AC/DC Power supplies 60 – 200 Watt

- Excellent thermal management
- Universal input
- EN 61000-3-2 compliant
- IEC/EN/UL 60950-1 approvals
- Pin connection
- EN 55022 class B filter

TOP 60	60 WATT	TOP 100	100 WATT	TPI 100	NEW	100 WATT
<ul style="list-style-type: none"> • Single, dual and triple output models • 3.3 to 48 VDC • Protection class I • 2" x 4" 		<ul style="list-style-type: none"> • 5.0 to 48 VDC • Protection class I & II • Adjustable output • Optional with casing • 2" x 4" (opt. casing) 		<ul style="list-style-type: none"> • Reinforced isolation • 12 to 48 VDC • ErP-ready • Protection class I & II • Adjustable output • 2" x 3" (opt. casing) 		
TPI 150	NEW	150 WATT	TOP 200	200 WATT		
<ul style="list-style-type: none"> • Highest power density • Reinforced isolation • 12 to 48 VDC • ErP-ready • Adjustable output • 2" x 4" (opt. casing) 			<ul style="list-style-type: none"> • 12 to 48 VDC • Protection class I & II • Remote On/Off • Optional with casing • 3" x 5" (opt. casing) 			

Encapsulated AC/DC Power Modules 2 – 100 Watt

- Universal input
- Protection class II
- EN 55022 class B filter
- IEC/EN/UL 60950-1 approvals
- Start-up temperature -40°C for TMM series

TMSB 2	NEW	2 WATT	TMPS 03	NEW	3 WATT	TMPS 05	NEW	5 WATT	
<ul style="list-style-type: none"> • Standby module for ErP directive • EN 60335-1 (household) • Const. power, no current limit • 8 to 24 VDC • 3.3 or 5.0 VDC aux. output • 36.5 x 28.4 x 15 			<ul style="list-style-type: none"> • PCB mount • EN 60335-1 (household) • 3.3 to 24 VDC • ErP-ready • 1" x 1" (h = 15.3 mm) 			<ul style="list-style-type: none"> • PCB mount • EN 60335-1 (household) • 3.3 to 24 VDC • ErP-ready • 1" x 1" (h = 15.3 mm) 			
TMS		6 – 25 WATT	TMPM		4 – 10 WATT	TMP		7 – 60 WATT	
<ul style="list-style-type: none"> • PCB/chassis • 5.0 to 24 VDC • Single/dual output • Models with blade connection 			<ul style="list-style-type: none"> • PCB mount • Ind. EMC immunity • 3.3 to 24 VDC • ErP-ready • Compact design 			<ul style="list-style-type: none"> • PCB mount • Ind. EMC immunity • 3.3 to 48 VDC • Single, dual, triple • Protection class II 			
TMP-C		15 – 60 WATT	TMLM		4 – 20 WATT	TML		20 – 40 WATT	
<ul style="list-style-type: none"> • Chassis mount • Ind. EMC immunity • 3.3 to 48 VDC • Single, dual, triple • Protection class II • UL 508 approval 			<ul style="list-style-type: none"> • PCB mount • 3.3 to 24 VDC • Single, dual • Protection class II • Compact design 			<ul style="list-style-type: none"> • PCB/chassis • Single, dual, triple • 3.3 to 24 VDC • Protection class I & II 			

TMT	10 – 50 WATT	TMM	NEW	24 – 60 WATT	TMM-C	NEW	24 – 60 WATT
<ul style="list-style-type: none"> • PCB/chassis • Medical 2 x MOOP • 3.3 to 24 VDC • Single, dual, triple • Protection class II • UL 508 approval (Chassis) 		<ul style="list-style-type: none"> • PCB mount • Medical 2 x MOPP • 5.0 to 48 VDC • Single/dual output • Protection class II • Low profile 		<ul style="list-style-type: none"> • Chassis mount • Medical 2 x MOPP • 5.0 to 48 VDC • Single/dual output • Protection class II • UL 508 approval 			
TML 100C	NEW	100 WATT	TIW	4 – 24 WATT			
<ul style="list-style-type: none"> • Chassis mount • Active PFC • 12 to 48 VDC • Protection class I & II • 140 x 62 x 37 mm 			<ul style="list-style-type: none"> • IP67 casing w. flying leads • EN 60335-1 (household) • 3.3 to 24 VDC • ErP-ready • Mount. in flash boxes 				

Metal Enclosure Power Supplies

15 – 1000 Watt

- Universal input
- EN 55022 class B filter
- Ind. EMC immunity
- International safety approval package
- Start-up temperature -40 °C for TPP 40/65 and TEX series

TPP 40	NEW	40 WATT	TPP 65	NEW	65 WATT	TPP 100	NEW	100 WATT	
<ul style="list-style-type: none"> • Medical 2 x MOPP • Ind. EMC immunity • 5.0 to 48 VDC adjust. • ErP-ready • Protection class II • 91 x 62 x 39 mm 			<ul style="list-style-type: none"> • Medical 2 x MOPP • Ind. EMC immunity • 5.0 to 48 VDC adjust. • ErP-ready • Protection class II • 91 x 62 x 39 mm 			<ul style="list-style-type: none"> • Medical 2 x MOPP • Ind. EMC immunity • 12 to 48 VDC adjust. • ErP-ready • Protection class II • 91 x 62 x 39 mm 			
TPP 150	NEW	150 WATT	TXM	15 – 320 WATT	TXL	15 – 1000 WATT			
<ul style="list-style-type: none"> • Medical 2 x MOPP • Ind. EMC immunity • 12 to 48 VDC adjust. • ErP-ready • Protection class II • 117 x 62 x 49 			<ul style="list-style-type: none"> • Cost optimized design • 3.3 to 48 VDC adjust. • ErP-ready (up to 75 W) • Protection class I 			<ul style="list-style-type: none"> • 3.3 to 48 VDC adjust. • Single, dual, triple • Protection class I 			
TXH	120 – 480 WATT		TXH 600	NEW	600 WATT	TEX	120 WATT		
<ul style="list-style-type: none"> • 12 to 48 VDC adjust. • Protection class I • Compact low profile 			<ul style="list-style-type: none"> • Universal power supply • Active PFC • 12 to 54 adjust. • Ind. EMC immunity • IEC-C13 line socket • Contr. & monitor signals 			<ul style="list-style-type: none"> • Outdoor power supply • All weather proof (IP67) • 12/24 VDC • Ind. EMC immunity • UL 508 • IECEx/Atex 			

DIN-Rail Power Supplies 15 – 960 Watt

- Universal input
- EN 55022 class B filter
- International safety approval package including UL 508
- Start-up temperature -40 °C for TMM and TFP series

TMP-C	15 – 60 WATT	TMM-C NEW	24 – 60 WATT	TBL	15 – 150 WATT
<ul style="list-style-type: none"> • Fully encapsulated • 3.3 to 48 VDC • Single, dual, triple • Protection class II • Low profile 		<ul style="list-style-type: none"> • Medical 2 x MOPP • Fully encapsulated • 5.0 to 48 VDC • Single/dual output • Protection class II • Low profile 		<ul style="list-style-type: none"> • Low profile plastic casing • 5.0 to 24 VDC • Protection class II • NEC class II (up to 90 W) 	
TCL	24 – 240 WATT	TPC	30 – 120 WATT	TSPC	50 – 480 WATT
<ul style="list-style-type: none"> • Slim plastic casing • 5.0 to 48 VDC adjust. • Protection Class I • Screw or spring clamp connection 		<ul style="list-style-type: none"> • Robust plastic casing • 5.0 to 48 VDC adjust. • ErP-ready • DC-OK signal 		<ul style="list-style-type: none"> • Rugged metal casing • 12 to 48 VDC adjust. • IECEEx/Atex • DC-OK signal 	
TSP	72 – 600 WATT	TSP 3P	240 – 960 WATT	TSP-WR	180 – 600 WATT
<ul style="list-style-type: none"> • Rugged metal casing • 12 to 48 VDC adjust. • Atex (opt.) approval • Entire control signals 		<ul style="list-style-type: none"> • Rugged metal casing • 3-phase input • 24 VDC adjust • High efficiency up to 92% • Atex approval • 200% boost power 		<ul style="list-style-type: none"> • Rugged metal casing • 24 VDC adjust • Wide input 85 to 550 VAC • Entire control signals 	
TIS	50 – 600 WATT	TFP NEW	250 – 750 WATT		
<ul style="list-style-type: none"> • Low profile metal casing • 12 to 72 VDC adjust • Int. function modules 		<ul style="list-style-type: none"> • Low profile metal casing • 150% boost power • 24 VDC adjust • Efficiency up to 92% • Atex approval • Entire control signals 			

UPS Systems

- Power Supplies with integrated battery controller modules
- Deep discharge protection
- Battery temperature supervision
- Battery test functions
- Entire control signals

TSPC 240UPS NEW 240 WATT

- Rugged metal casing
- 24 VDC output
- Use with 12 VDC battery
- Tight output regulation in power fail mode



Battery Controller Modules/Battery Pack

- Deep discharge protection
- Battery temperature supervision
- Battery test functions
- Entire control signals

TSP-BCMU360 NEW 360 WATT

- Universal module
- For 24 & 48 VDC
- Use with 12 VDC battery
- No remote link to PS
- Redundant operation
- Rugged metal casing



TSP-BCM

- TSP Series access. module
- For 12, 24, 48 VDC
- Rugged metal casing

12 – 48 VDC



TSP-BAT

- Battery packs
- High quality lead acid
- 12 VDC/7.2 Ah
- 24 VDC 1.2 to 12 Ah



Buffer Module

- Buffers short time mains black-outs and voltage dips
- No external battery required
- Entire control signals

TSP-BFM

600 WATT

- Universal module
- For 24 VDC
- 5 Ws buffer energy
- No remote link to PS



Decoupling and Current Share Modules

- For 2 units in redundant and parallel operation
- International safety approval package

TSPC-DCM**600 WATT**

- Universal module
- For 5 – 28 VDC
- 2 x 25 A – 50 A out max.
- No remote link to PS
- (no signal outputs)
- Rugged metal casing

**TPC-REM****240 WATT**

- TPC series access modules
- Active current sharing
- For 24 or 48 VDC models
- 2 Inputs, 240 W
- DC-OK signal output
- Robust plastic casing

**TCL-REM****480 WATT**

- Universal module
- For 5 – 60 VDC
- 2 x 5 A – 10 A out max.
- No remote link to PS
- (no signal outputs)
- Slim plastic casing

**TSP-REM****360 – 600 WATT**

- TSP series access modules
- Active current sharing
- For 24 VDC, 2 inputs
- Alarm signal
- Remote On/Off
- Rugged metal casing





TRACO – dedicated to design and production of high industrial quality, state-of-the-art AC/DC & DC/DC power conversion products.

Our mission is to provide optimal power supply solutions for specific applications with regard to performance, quality, cost and functionality.

High ex-stock availability, short-term delivery and an extended Traco Power product life-cycle provides quick and long-term disposability.

Our commitment to quality is supported by a 3 year product warranty for all products.